

MPEG-4 AVC/H.264 Video Codecs Comparison

Full version of report

Project head: Dmitriy Vatolin Measurements, analysis: Dmitriy Kulikov, Alexander Parshin

Codecs:

Dicas H.264 Elecard H.264 Intel IPP H.264 MainConcept H.264 x264 XviD (MPEG-4 ASP codec)

> May 2009 CS MSU Graphics&Media Lab Video Group

http://www.compression.ru/video/codec_comparison/index_en.html videocodec-testing@graphics.cs.msu.ru

Contents

С	ontents		2
1	Acknowledgments 4		
2	Overview		
	2.1	Sequences	5
	2.2	Codecs	5
	2.3	Table of Noteworthy Points in Codec Comparison	6
3	Obje	ectives and Testing Rules	8
	3.1	H.264 Codec Testing Objectives	8
	3.2	Testing Rules	8
4	Corr	nparison Results	10
	4.1	Video conferences	10
	4.1.1		
	4.1.2 4.1.3	5 - 1	
	4.1.3	-1	
	4.1.5		
	4.2	Movies	46
	4.2.1	RD Curves	46
	4.2.2		
	4.2.3		
	4.2.4 4.2.5		
	4.2.0	HDTV	
	4.3.1		
	4.3.2		
	4.3.3		
	4.3.4	0	
	4.3.5		
	4.4	Conclusions	
	4.4.1 4 4 2		
	4.4.2		
	4.4.4		
	4.4.5	Comments from developers	118
5	Арр	endix 1. One Pass High Quality Encoding	119
	5.1	Movie	119
	5.1.1		
	5.1.2		
	5.1.3		
	5.1.4 5.1.5	0	
	5.2	HDTV	
	5.2.1 5.2.2		
	5.2.2		
	5.2.4	Bitrate Handling	149
	5.2.5		
6	Арр	endix 2. Codecs Analysis using Synthetic Sequences	153

6.1 6.2 6.3	A	Estimation of Motion Compensation Quality	155
7	Apper	ndix 3. x264 Over-years Comparison1	58
8 /	Apper	ndix 4. Test Set of Video Sequences1	64
8.1	V	/ideoconference Sequences 1	164
3 3	8.1.1 8.1.2 8.1.3 8.1.4	"Akiyo" "Foreman" "Paris" "Stefan"	165 166
8.2		Novie Sequences	
8	8.2.1 8.2.2 8.2.3 8.2.4	"Indiana Jones" "Battle" "State Enemy" "Wendys"	169 170
8.3		IDTV Sequences	
8	8.3.1 8.3.2 8.3.3 8.3.4	"Mobile Calendar" "Pedestrian Area" "Stockholm" "Troy"	173 174
9 /	Apper	ndix 5. Tested Codecs and Presets1	76
9.1	С	Codecs 1	176
	9.1.1 9.1.2 9.1.3 9.1.4 9.1.5 9.1.6	dicas' mpegable H.264 Command-line encoder Elecard AVC Video Encoder 8-bit edition Intel IPP H.264 enc MainConcept H.264/AVC encoder x264 encoder Xvid encoder	177 177 178 178
9.2	Ρ	Presets 1	180
10	Арр	pendix 6. Figures Explanation1	84
10.2		Sitrates Ratio with the Same Quality 1	
10.3		Relative Codec Encoding Time Computation 1	
11		pendix 7. Objective Quality Metrics Description1	
11.2 11.2	11.1.1 11.1.2	PSNR (Peak Signal-to-Noise Ratio) Brief Description Examples SSIM (Structural SIMilarity) Brief Description Examples	187 187 190 190
12	List	of Figures1	93
13	Abc	out the Graphics & Media Lab Video Group2	204

1 Acknowledgments

The Graphics & Media Lab Video Group would like to express its gratitude to the following companies for providing the codecs and settings used in this report:

- dicas digital image coding GmbH
- Elecard Ltd
- Intel Corporation
- MainConcept GmbH
- x264 Development Team
- XviD

The Video Group would also like to thank these companies for their help and technical support during the tests.

2 Overview

2.1 Sequences

Sequence	Number of	Frame rate	Resolution and
	frames		color space
1. Akiyo	300	30	352x288(YV12)
2. Foreman	300	30	352x288(YV12)
3. Paris	1065	30	352x288(YV12)
4. Stefan	300	30	352x288(YV12)
5. Battle	1599	24	704x288(YV12)
6. Wendys	260	30	720x576(YV12)
7. State Enemy	6500	24	720x304(YV12)
8. Indiana Jones	5000	30	704x288(YV12)
9. Mobile Calendar	504	50	1280x720(YV12
10. Stockholm	604	50	1280x720(YV12
11. Troy	300	24	1920x1072(YV12
12. Pedestrian Area	375	24	1920x1080(YV12

Table 1.Summary of video sequences.

Brief descriptions of the sequences used in our comparison are given in Table 1. More detailed descriptions of these sequences can be found in Appendix 4. Test Set of Video Sequences.

2.2 Codecs

Table 2.	Short codec descr	iptions
Codec	Developer	Version
1. dicas' mpegable H.264 Command-line encoder	dicas digital image coding GmbH	3.9.4
2. Elecard AVC Video Encoder 8-bit edition	Elecard Ltd	build Feb 17 2009
3. Intel IPP H.264 Encoder	Intel Corp.	part of "IPP 6.1 Gold" media samples
4. MainConcept AVC/H.264 Video Encoder Console Application	MainConcept GmbH	MainConcept Codec SDK 8.1
5. x264	x264 Development Team	x264 core:67 r1123M 3d78062
6. Xvid raw mpeg4 bitstream encoder	Xvid	version for 24.08.2007

Brief descriptions of the codecs used in our comparison are given in Table 2. XviD was used as a good quality MPEG-4 ASP reference codec for comparison purposes. Detailed descriptions of all codecs used in our comparison can be found in Appendix 5. Tested Codecs.

2.3 Table of Noteworthy Points in Codec Comparison

The following table lists the bugs, errors and other interesting points regarding the codecs tested in this comparison.

Codec and Preset	Point Description	Reference
Videoconferences, XviD, High Quality and High Speed	Unstable encoding speed depending on bitrate	Figure 18– Figure 21
Videoconferences, Intel IPP H.264, High Quality and High Speed	Unstable encoding speed depending on bitrate at "Stefan" and "Akiyo"	Figure 20 – Figure 21
Videoconferences, Elecard, High Speed	For the "Paris" and "Stefan" sequences Elecard has no strong dependency of encoding speed on bitrate	Figure 23, Figure 24
Videoconferences, all the encoders except the Intel IPP H.264, High Quality	Bad bitrate handling algorithm at "Akiyo" sequence	Figure 45
Videoconferences, MainConcept, Intel IPP H.264, dicas, High Quality	Increase low bitrates at "Stefan" sequence	Figure 48
Videoconferences, all the encoders except the Intel IPP H.264 and Elecard, High Speed	Bad bitrate handling algorithm at "Akiyo" sequence	Figure 49
Videoconferences, Elecard, High Speed	Increase low bitrates at "Foreman" sequence	Figure 50
Videoconferences, all the encoders except x264, High Speed	Increase low bitrates at "Stefan" sequence	Figure 52
Videoconferences, XviD	Bad bitrate handling algorithm at all sequence	Figure 45 – Figure 52
Movies, dicas, High Quality and High Speed	Unstable RD curve for "Wendys" sequence for Y-PSNR and for Y-SSIM	Figure 60, Figure 64, Figure 68 and Figure 72
Movies, dicas, High Quality	Has no strong dependency in encoding speed on bitrate	Figure 74, Figure 75
Movies, Elecard, dicas and x264, High Speed	Encoding speed for the encoders has low dependency on target bitrate for "State Enemy" sequence	Figure 79
Movies, XviD, High Quality and High Speed	Decreases high bitrates at "State Enemy" sequence	Figure 103, Figure 107
Movies, dicas, High Quality	Bad bitrate handling algorithm at "Wendys" sequence	Figure 104
Movies, XviD, High	Strongly increases all bitrates	Figure 104

Quality		
Movies, Elecard, High Speed	Strongly increases target bitrates at "Battle" sequence	Figure 105
Movies, XviD, Elecard and dicas, High Speed	Bad bitrate handling algorithm at "Wendys" sequence, for Xvid and Elecard – increasing and decreasing target bitrates, for dicas – unstable bitrate handling.	Figure 108
HDTV, Elecard, High Speed	Unstable encoding speed depending on target bitrate	Figure 136
HDTV, XviD, High Quality and High Speed	Bad bitrate handling algorithm at all the sequences, mainly increasing low bitrates	Figure 157 – Figure 164
HDTV, Elecard, High Speed	Unstable bitrate handling at "Mobile Calendar", "Pedestrian Area" and "Troy" sequences especially at low bitrates	Figure 161, Figure 162 and Figure 164
Movie, x264, One Pass High Quality	Not stable bitrate handling at "State Enemy" sequence mainly decreasing all the bitrates	Figure 201
HDTV, x264, One Pass High Quality	Not stable bitrate handling at "Mobile Calendar" sequence mainly increasing all the bitrates	Figure 227
Movies, Over Year Comparison	Strong difference between Y-SSIM and Y- PSNR results for different versions of x264	Figure 242 – Figure 245

3 Objectives and Testing Rules

3.1 H.264 Codec Testing Objectives

The main goal of this report is the presentation of a comparative evaluation of the quality of new H.264 codecs using objective measures of assessment. The comparison was done using settings provided by the developers of each codec.

3.2 Testing Rules

- The entire test set was divided into three primary types of applications. These applications differ by resolution, bitrate and encoding speed requirements:
 - Videoconferences (bitrates of 50-400 kbps)
 - Movies (bitrates of 500-1500 kbps)
 - High-definition television ("HDTV"; bitrates of 1-10 mbps)
- There are special presets and speed limitations for every type of application:
 - Videoconferences (speed requirements for 200 kbps CIF sequences):
 - Minimum 100 fps for "High Speed" preset
 - Minimum 50 fps for "High Quality" preset
 - Movies (speed requirements for 750 kbps 4CIF sequences):
 - Minimum 40 fps for "High Speed" preset
 - Minimum 12 fps for "High Quality" preset
 - HDTV (speed requirements for 3 mbps 1280x720 sequences):
 - Minimum 10 fps for "High Speed" preset
 - Minimum 3 fps for "High Quality" preset
- The developer of each codec provided settings for each type of Application. The individual parameters of each setting to a large extent were chosen by the developers.
- Each codec was tested for speed three times; the median score (the middle value of the three measurements) was then used as the representative time.
- During the testing process, source video sequences were in the YV12 format (.yuv file extension)
- For all measurements the PRO version of the MSU Video Quality Measurement Tool was used (<u>http://www.compression.ru/video/quality_measure/vqmt_pro_en.h</u> <u>tml#start</u>).
- The following computer configuration was used for the main tests, except for multi-core encoding:

OS Name

Processor4-cores processor: Intel Core Quad Q6600Total Physical Memory4093.42 MBVideo Adapter TypeNVIDIA GeForce 8500 GT

During the evaluation the following measures were used:

- PSNR (Y, U, V components)
- SSIM (Y, U, V components)

More detailed information about these measures may be found on the Internet at the following URL:

http://www.compression.ru/video/quality_measure/info.html

4 Comparison Results

4.1 Video conferences

4.1.1 RD Curves

4.1.1.1 High Quality Preset

High Quality preset results for each sequence are presented in Figure 1 through Figure 8. The first four figures depict the PSNR results and the last four depict the SSIM results. MainConcept yields the best results for all sequences except "Stefan"; the x264 encoder demonstrates the best results for this sequence according to the Y-PSNR and Y-SSIM metrics. Intel IPP shows slightly lower quality than x264, but all three codecs (MainConcept, x264 and Intel IPP H.264) mainly are very close according to objective quality metrics. The dicas encoder yields the quality results close to XviD encoder. The video conference tests have been accomplished without any restrictions on frame types and VBV buffer size, although video conferencing requires disabled B-frames and a small VBV-buffer. These authentic video conference settings reduce the end-to-end delay but have a negative impact on the picture quality. The only codec applying these authentic presets was the dicas encoder.

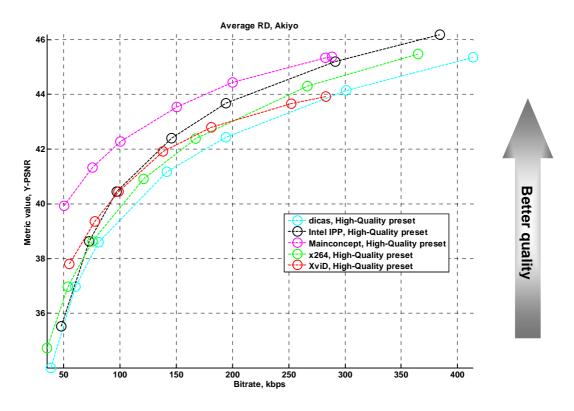


Figure 1. Bitrate/Quality. Usage area "Video Conferences", "Akiyo" sequence, "High Quality" preset, Y-PSNR

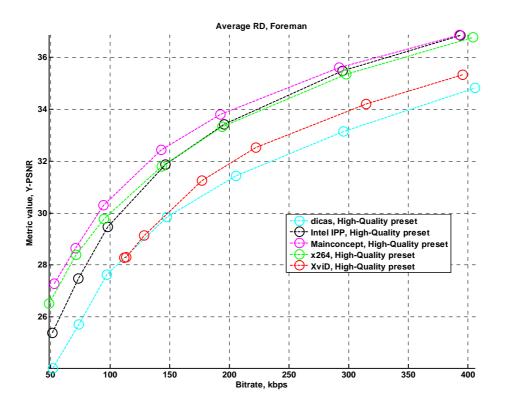


Figure 2. Bitrate/Quality. Usage area "Video Conferences", "Foreman" sequence, "High Quality" preset, Y-PSNR

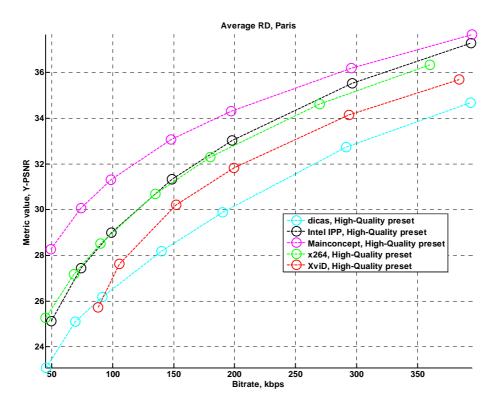


Figure 3. Bitrate/Quality. Usage area "Video Conferences", "Paris" sequence, "High Quality" preset, Y-PSNR

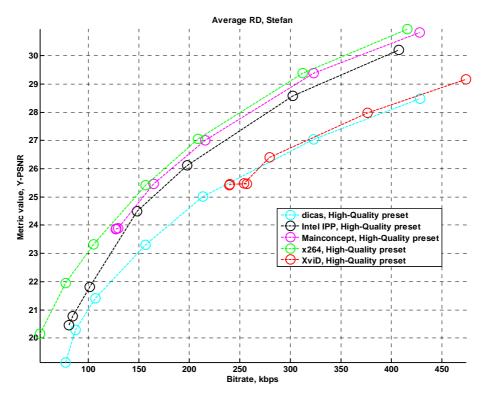


Figure 4. Bitrate/Quality. Usage area "Video Conferences", "Stefan" sequence, "High Quality" preset, Y-PSNR

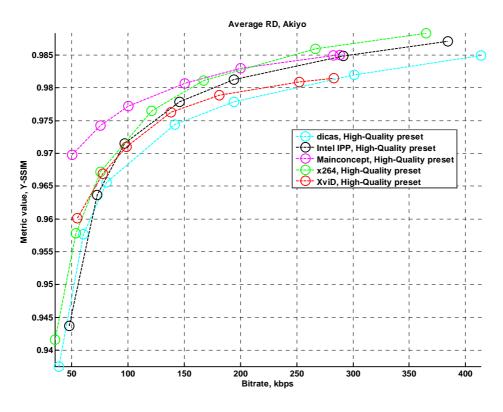


Figure 5. Bitrate/Quality. Usage area "Video Conferences", "Akiyo" sequence, "High Quality" preset, Y-SSIM

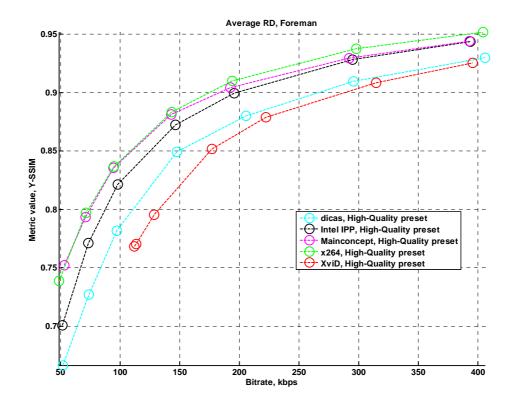


Figure 6. Bitrate/Quality. Usage area "Video Conferences", "Foreman" sequence, "High Quality" preset, Y-SSIM

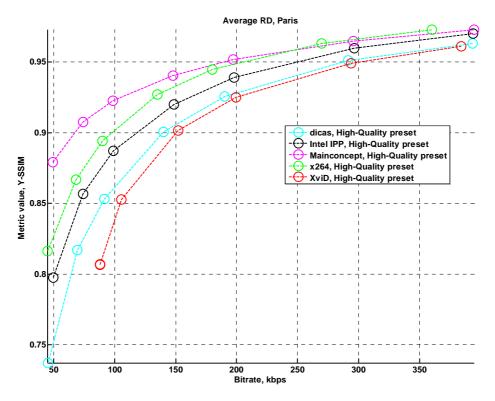


Figure 7. Bitrate/Quality. Usage area "Video Conferences", "Paris" sequence, "High Quality" preset, Y-SSIM

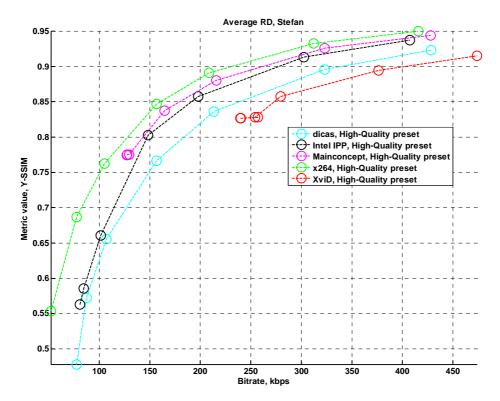


Figure 8. Bitrate/Quality. Usage area "Video Conferences", "Stefan" sequence, "High Quality" preset, Y-SSIM

4.1.1.2 High Speed Preset

The RD curves for the High Speed preset are shown in Figure 9 through Figure 16. The leading codecs for this preset are the MainConcept and x264. MainConcept outperforms x264 strongly with Y-PSNR metrics, but when using Y-SSIM two encoders are quite comparable. The third place could take Intel IPP H.264 encoder, but it has near the lowest results for "Paris" sequence especially when using Y-SSIM for analysis. The next encoders are Elecard and dicas (with disabled B-frames and low VBV-buffer preset). The first one shows good result at "Paris" sequence, and the last one has low results at "Foreman" and "Paris" sequences especially for Y-PSNR metric. XviD shows the lowest result at average.

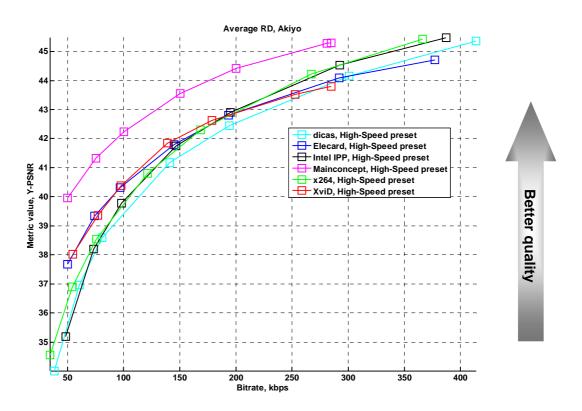


Figure 9. Bitrate/Quality. Usage area "Video Conferences", "Akiyo" sequence, "High Speed" preset, Y-PSNR

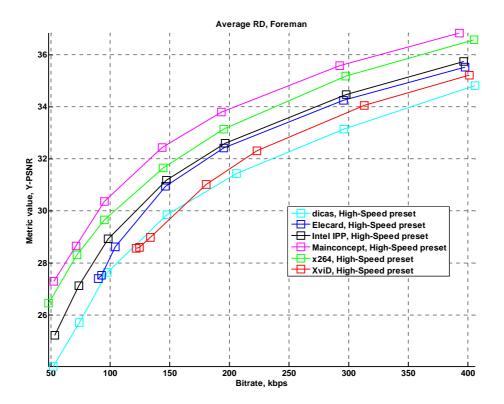


Figure 10. Bitrate/Quality. Usage area "Video Conferences", "Foreman" sequence, "High Speed" preset, Y-PSNR

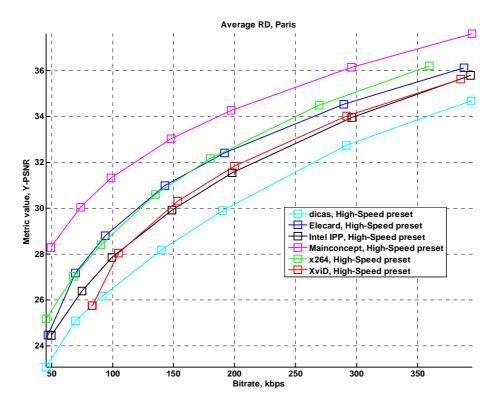


Figure 11. Bitrate/Quality. Usage area "Video Conferences", "Paris" sequence, "High Speed" preset, Y-PSNR

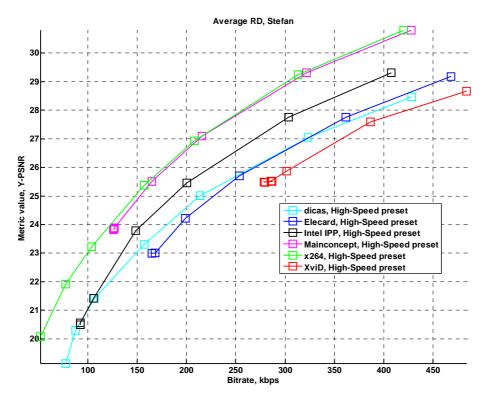


Figure 12. Bitrate/Quality. Usage area "Video Conferences", "Stefan" sequence, "High Speed" preset, Y-PSNR

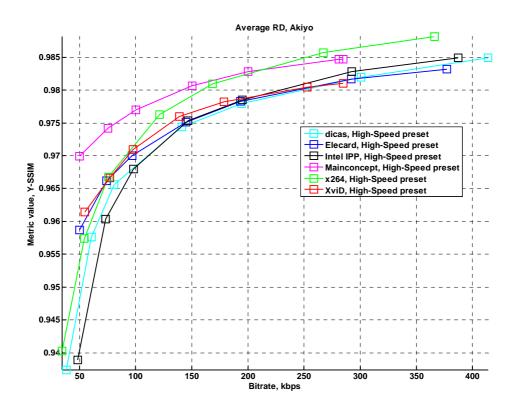


Figure 13. Bitrate/Quality. Usage area "Video Conferences", "Akiyo" sequence, "High Speed" preset, Y-SSIM

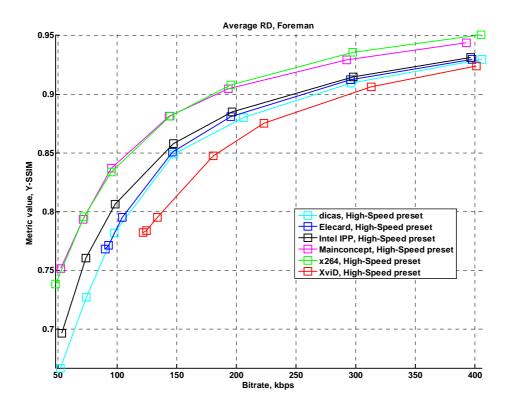


Figure 14. Bitrate/Quality. Usage area "Video Conferences", "Foreman" sequence, "High Speed" preset, Y-SSIM

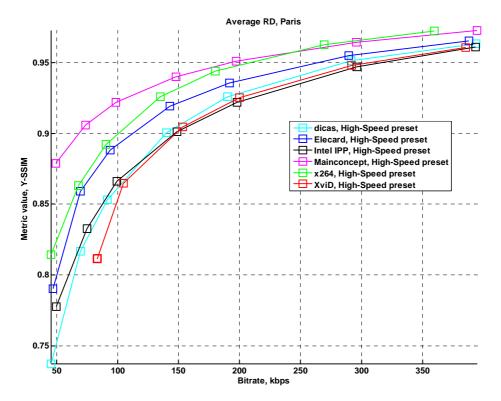


Figure 15. Bitrate/Quality. Usage area "Video Conferences", "Paris" sequence, "High Speed" preset, Y-SSIM

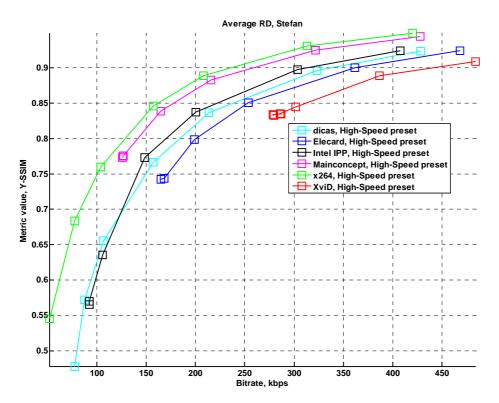


Figure 16. Bitrate/Quality. Usage area "Video Conferences", "Stefan" sequence, "High Speed" preset, Y-SSIM

4.1.2 Encoding Speed

Absolute speed results are presented in Figure 17 through Figure 24. Note the differing dependence of encoding time on bitrate. The Intel IPP H.264, MainConcept and x264 encoders all have a similar growth rate for the encoding time as the bitrate is increased. dicas encoder has lower dependency between bitrate and encoding speed. Results for XviD are not stable. Among all the encoders for High Speed preset, Elecard is the fastest. and it has the lowest dependency of encoding speed on bitrate.

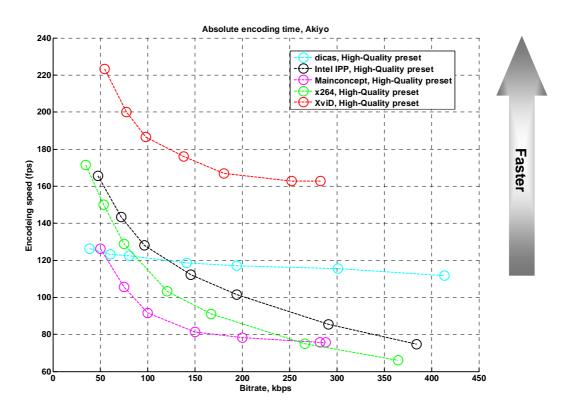


Figure 17. Encoding speed. Usage area "Video Conferences", "Akiyo" sequence, "High Quality" preset

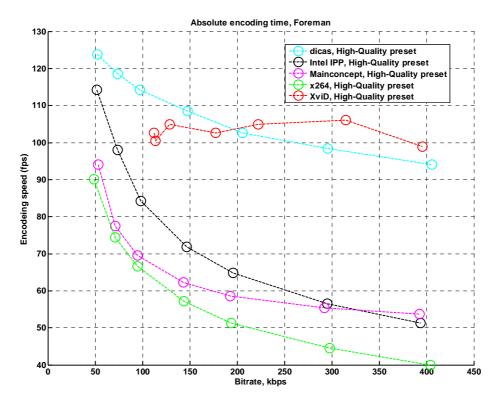


Figure 18. Encoding speed. Usage area "Video Conferences", "Foreman" sequence, "High Quality" preset

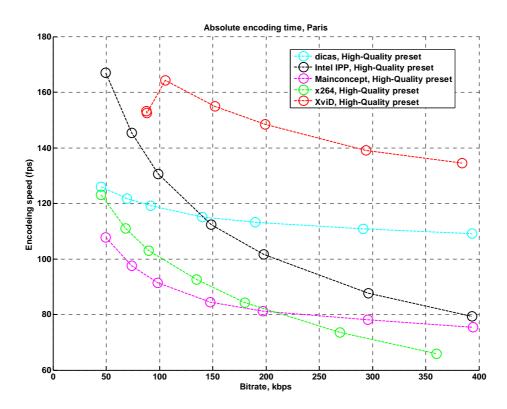


Figure 19. Encoding speed. Usage area "Video Conferences", "Paris" sequence, "High Quality" preset

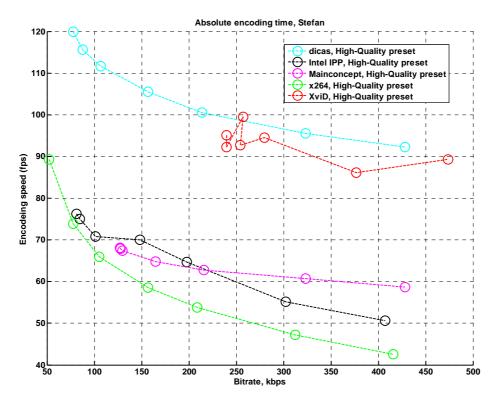


Figure 20. Encoding speed. Usage area "Video Conferences", "Stefan" sequence, "High Quality" preset

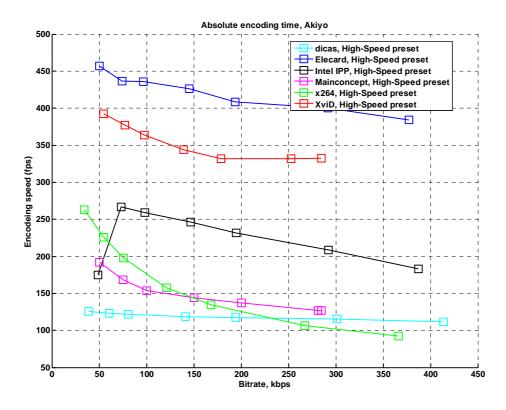


Figure 21. Encoding speed. Usage area "Video Conferences", "Akiyo" sequence, "High Speed" preset

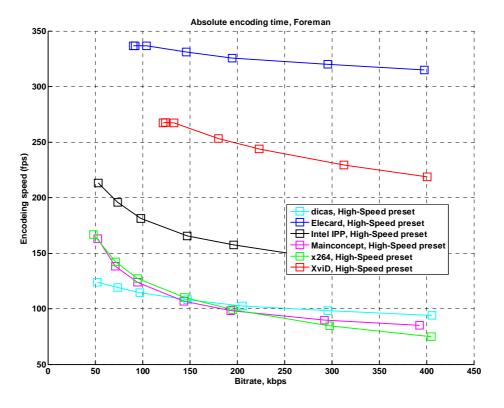


Figure 22. Encoding speed. Usage area "Video Conferences", "Foreman" sequence, "High Speed" preset

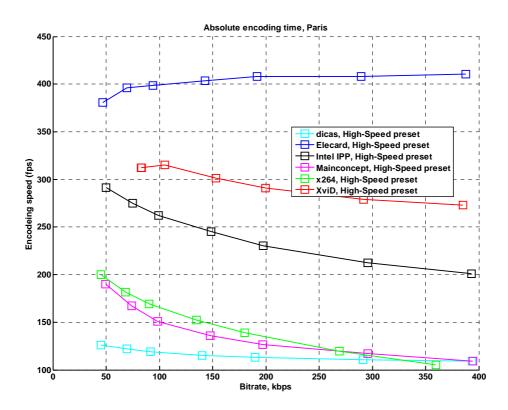


Figure 23. Encoding speed. Usage area "Video Conferences", "Paris" sequence, "High Speed" preset

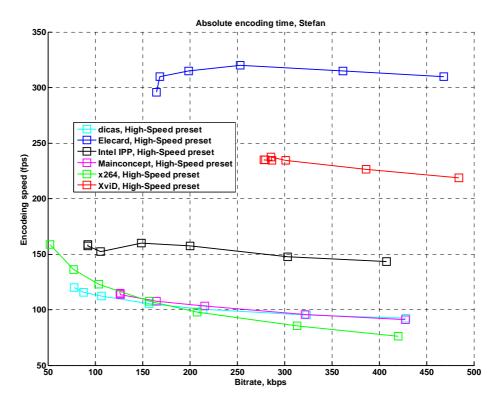


Figure 24. Encoding speed. Usage area "Video Conferences", "Stefan" sequence, "High Speed" preset

4.1.3 Speed/Quality Trade-Off

Speed/quality trade-off charts simultaneously show the relative quality and encoding speed of the encoders tested in this comparison. The reference codec is XviD, which has a quality and a speed both equal to unity in all of the below charts. The comparative terms "better" and "worse" are used at times for comparing the codecs in these charts; these terms simply mean that one codec is of higher speed and better quality (or lower speed and lower quality) than is another codec.

Detailed descriptions of the speed/quality trade-off graphs can be found in Appendix 6. Figures Explanation. Sometimes codec results are not present in the particular graph. The reason for that are extremely poor results of the codec. Its RD curve has no intersection with reference's RD curve.

Figure 25 through Figure 34 show the results of the tests for the High Quality preset. For Y-PSNR the MainConcept codec is better than x264 codecs for the "Foreman" sequence and at average, Intel IPP H.264 is better than x264 at "Akiyo", "Paris" sequences and at average, and XviD is better than dicas (with disabled B-frames and low VBV-buffer preset) at "Akiyo", "Paris" sequences and at average. It interesting to note that difference is mainly on the same sequences: "Akiyo" and "Paris", these sequences have static background and low motion. For Y-SSIM there are another situation dicas encoder is better than XviD at "Foreman" and "Stefan" sequences, and MainConcept is better than x264 at average.

Please note that the averaging method among all sequences suppose that all codecs have the results for each sequence. When it's not the case, then only existing results are taking into account.

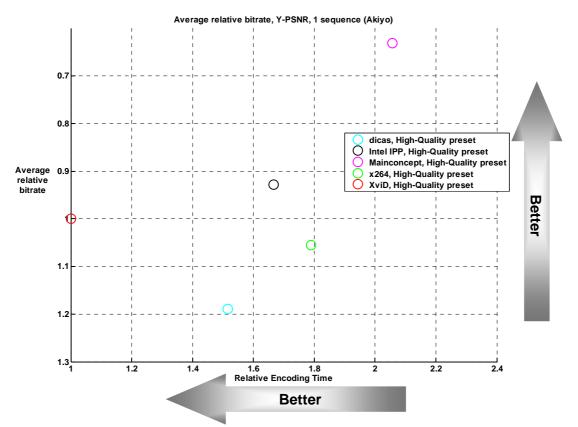


Figure 25. Speed/Quality tradeoff. Usage area "Video Conferences", "Akiyo" sequence, "High Quality" preset, Y-PSNR

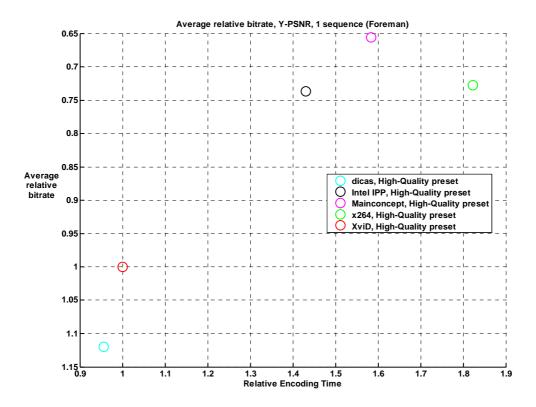


Figure 26. Speed/Quality tradeoff. Usage area "Video Conferences", "Foreman" sequence, "High Quality" preset, Y-PSNR

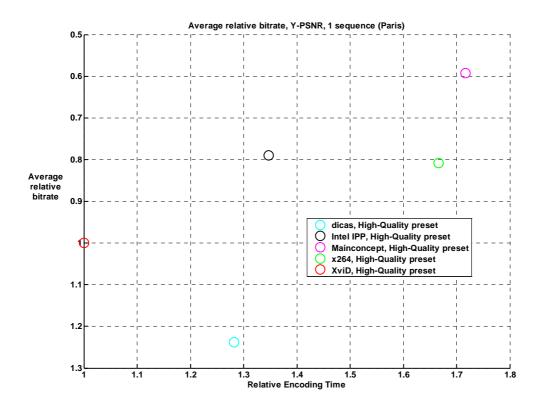


Figure 27. Speed/Quality tradeoff. Usage area "Video Conferences", "Paris" sequence, "High Quality" preset, Y-PSNR

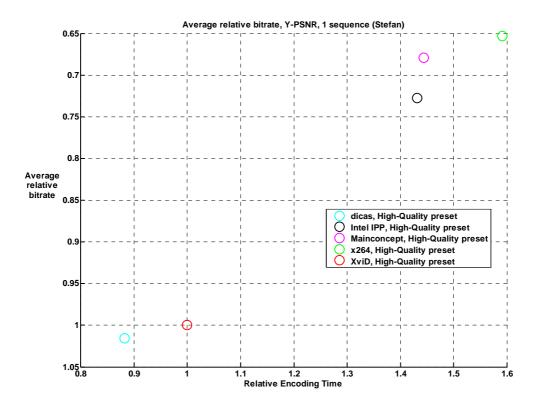


Figure 28. Speed/Quality tradeoff. Usage area "Video Conferences", "Stefan" sequence, "High Quality" preset, Y-PSNR

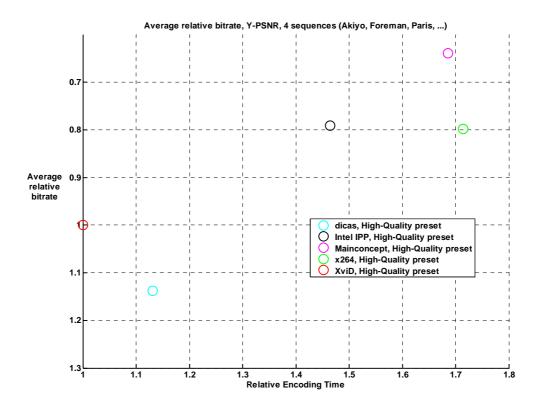


Figure 29. Speed/Quality tradeoff. Usage area "Video Conferences", all sequences, "High Quality" preset, Y-PSNR

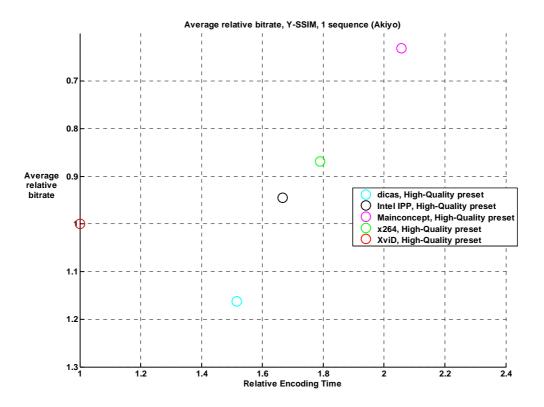


Figure 30. Speed/Quality tradeoff. Usage area "Video Conferences", "Akiyo" sequence, "High Quality" preset, Y-SSIM

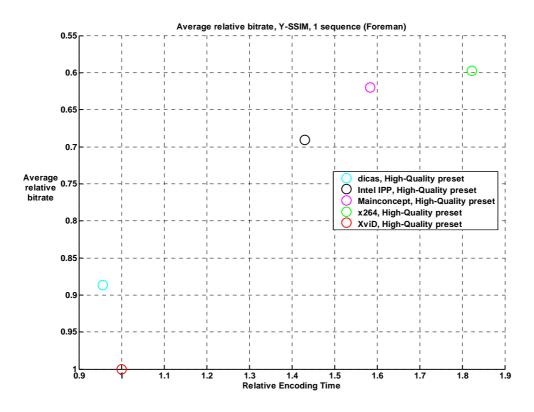


Figure 31. Speed/Quality tradeoff. Usage area "Video Conferences", "Foreman" sequence, "High Quality" preset, Y-SSIM

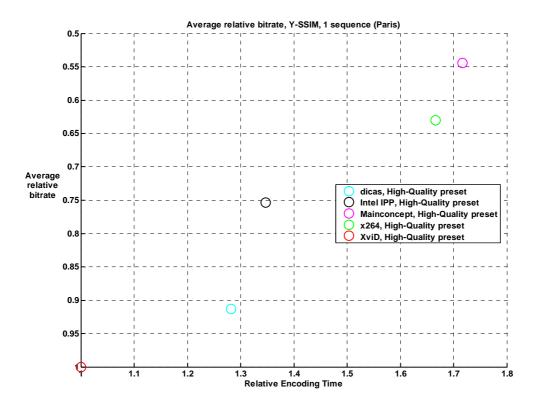


Figure 32. Speed/Quality tradeoff. Usage area "Video Conferences", "Paris" sequence, "High Quality" preset, Y-SSIM

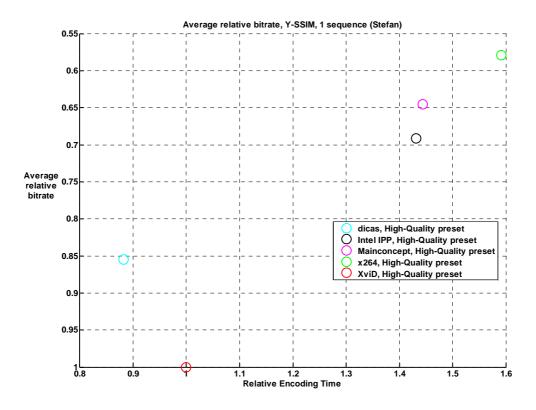


Figure 33. Speed/Quality tradeoff. Usage area "Video Conferences", "Stefan" sequence, "High Quality" preset, Y-SSIM

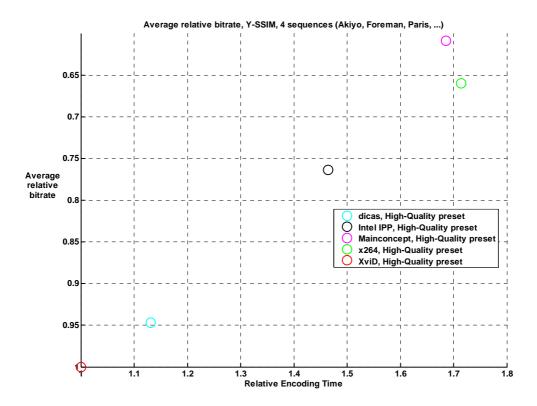


Figure 34. Speed/Quality tradeoff. Usage area "Video Conferences", all sequences, "High Quality" preset, Y-SSIM

4.1.3.1 High Speed Preset

Figure 35 through Figure 44 show the results of the tests for the High Speed preset. For Y-PSNR:

- MainConcept and x264 encoders are better than dicas and Intel IPP H.264 is better than x264 at "Akiyo" sequence;
- at "Foreman" sequence MainConcept encoder is better than x264, Intel IPP H.264, Elecard and XviD are better than dicas and Elecard is better than XviD;
- at "Paris" sequence Intel IPP H.264, Elecard, MainConcept and Elecard is better than dicas, and Elecard is better than XviD and Intel IPP H.264, and XviD is slightly better than Intel IPP H.264;
- at "Stefan" sequence x264 is better than MainConcept and dicas, Intel IPP H.264 and Elecard are better than dicas and Elecard is better than XviD;
- at average all the encoders are better than dicas and Elecard is better than x264.

For Y-SSIM:

- At "Akiyo" sequence all the encoders is better than dicas and Elecard and XviD are better than Intel IPP H.264;
- at "Foreman" sequence Elecard, Intel IPP H.264 and MainConcept are better than dicas and Elecard is better than XviD;
- at "Paris" sequence Elecard, x264 and MainConcept are better than dicas, and Elecard is better than Intel IPP H.264 and XviD encoders;
- at "Stefan" sequence x264 is better than MainConcept, and Intel IPP H.264 and x264 are better than dicas, and Elecard is better than XviD;
- at average all the encoders except XviD is better than dicas and Elecard encoder is better than XviD encoder.

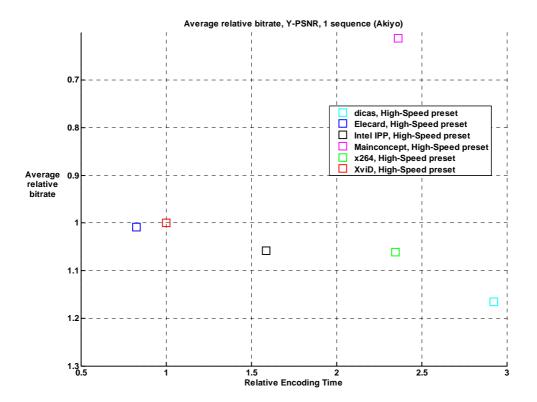


Figure 35. Speed/Quality tradeoff. Usage area "Video Conferences", "Akiyo" sequence, "High Speed" preset, Y-PSNR

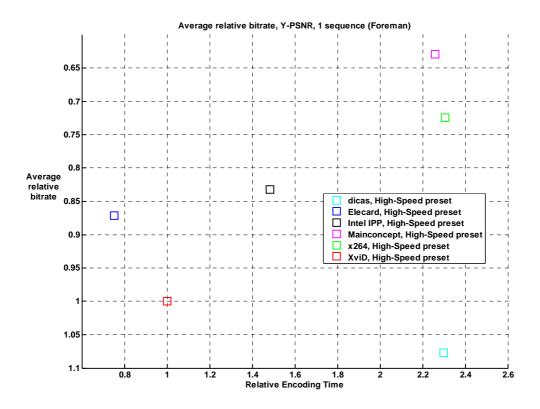


Figure 36. Speed/Quality tradeoff. Usage area "Video Conferences", "Foreman" sequence, "High Speed" preset, Y-PSNR

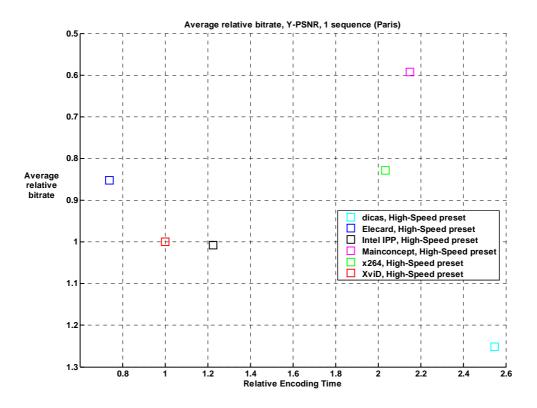


Figure 37. Speed/Quality tradeoff. Usage area "Video Conferences", "Paris" sequence, "High Speed" preset, Y-PSNR

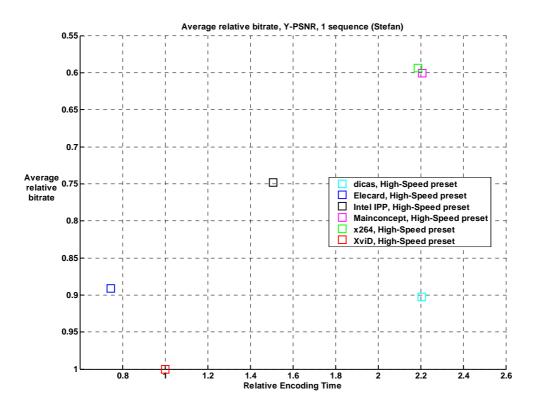


Figure 38. Speed/Quality tradeoff. Usage area "Video Conferences", "Stefan" sequence, "High Speed" preset, Y-PSNR

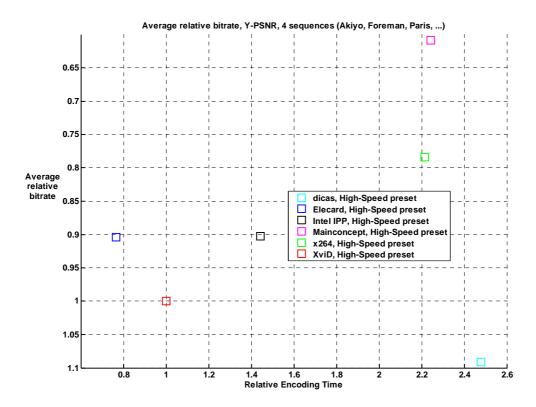


Figure 39. Speed/Quality tradeoff. Usage area "Video Conferences", all sequences, "High Speed" preset, Y-PSNR

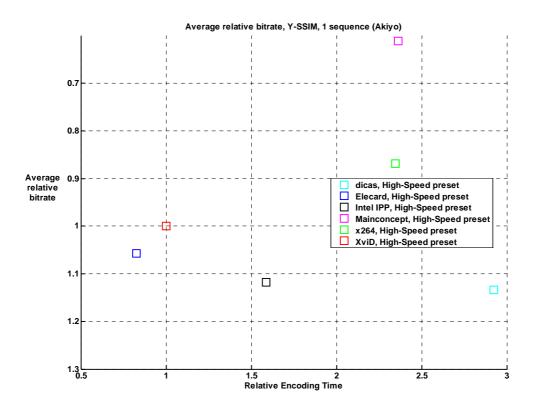


Figure 40. Speed/Quality tradeoff. Usage area "Video Conferences", "Akiyo" sequence, "High Speed" preset, Y-SSIM

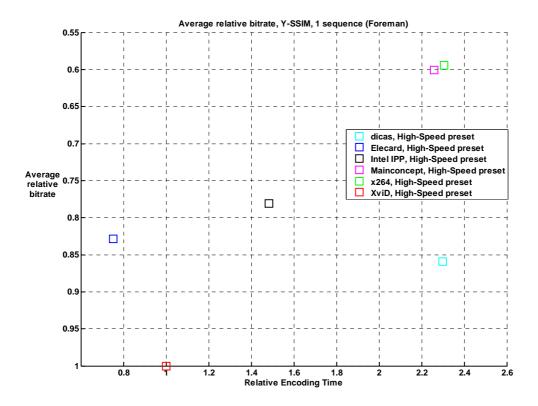


Figure 41. Speed/Quality tradeoff. Usage area "Video Conferences", "Foreman" sequence, "High Speed" preset, Y-SSIM

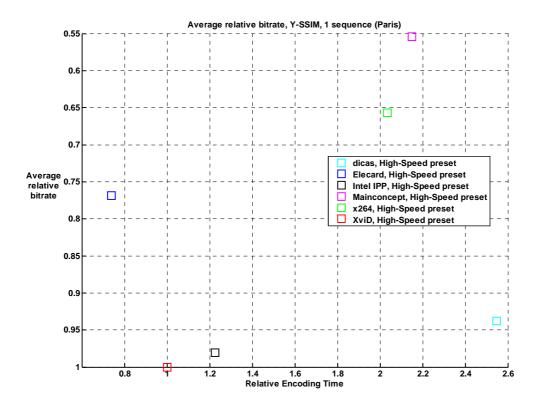


Figure 42. Speed/Quality tradeoff. Usage area "Video Conferences", "Paris" sequence, "High Speed" preset, Y-SSIM

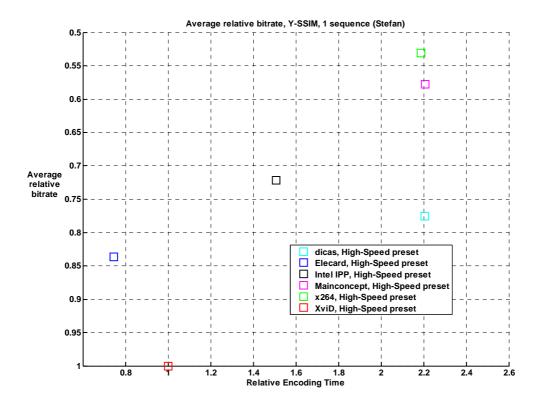


Figure 43. Speed/Quality tradeoff. Usage area "Video Conferences", "Stefan" sequence, "High Speed" preset, Y-SSIM

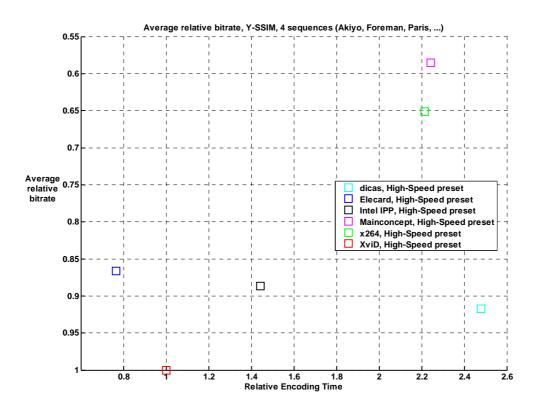


Figure 44. Speed/Quality tradeoff. Usage area "Video Conferences", all sequences, "High Speed" preset, Y-SSIM

4.1.4 Bitrate Handling

Encoders with High Quality presets show good bitrate keeping at average, but there are some interesting points. First of all, at "Akiyo" only Intel IPP H.264 encoder shows good results, XviD and MainConcept encoders increase bitrates at low bitrates and decrease – at high bitrates, and dicas (with disabled B-frames and low VBV-buffer preset) and XviD encoders – vice versa. At "Foreman" sequence all encoders except XviD show good results. At "Paris" sequence the situation is very close (XviD does not handle bitrate very accurately), but x264 decreases target bitrate stably. At "Stefan" sequence all encoders except x264 increase low bitrates – Intel IPP H.264 and dicas encoders increase only lowest bitrates at 1.2-1.5 times, and MainConcept and XviD show much more inaccurate bitrate handling, especially XviD.

With High Speed preset the situation is almost the same, but Elecard encoder demonstrates bitrate increasing at "Foreman" and "Stefan" sequences at low bitrates.

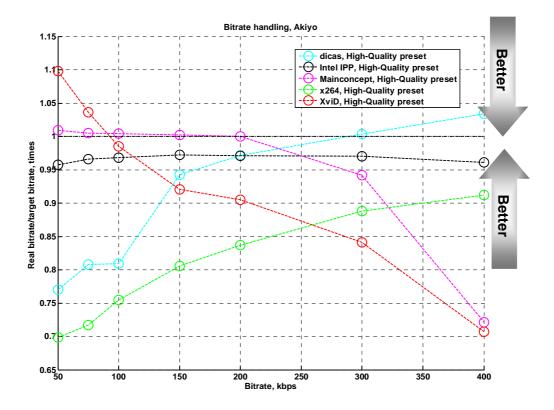


Figure 45. Bitrate Handling. Usage area "Video Conferences", "Akiyo" sequence, "High Quality" preset

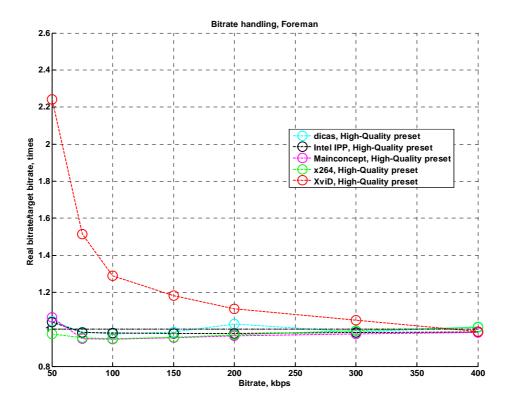


Figure 46. Bitrate Handling. Usage area "Video Conferences", "Foreman" sequence, "High Quality" preset

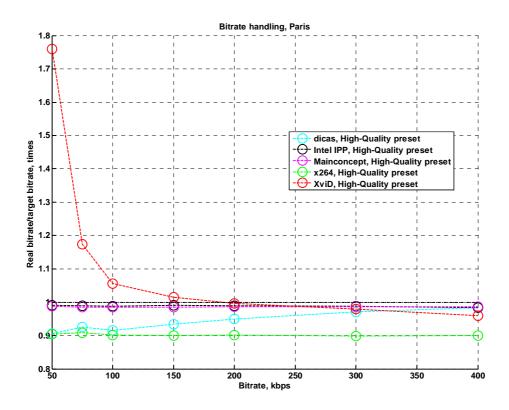


Figure 47. Bitrate Handling. Usage area "Video Conferences", "Paris" sequence, "High Quality" preset

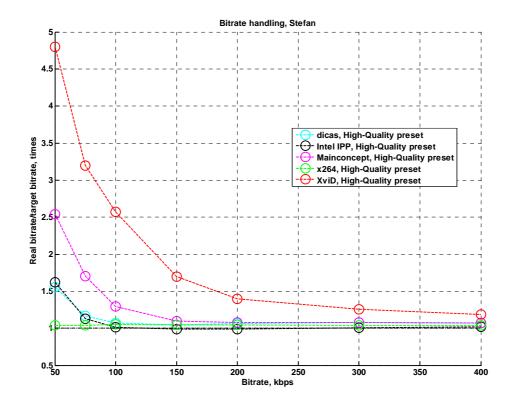


Figure 48. Bitrate Handling. Usage area "Video Conferences", "Stefan" sequence, "High Quality" preset

4.1.4.1 High Speed Preset

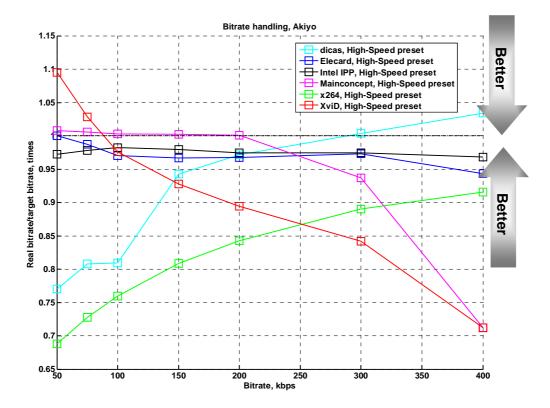


Figure 49. Bitrate Handling. Usage area "Video Conferences", "Akiyo" sequence, "High Speed" preset

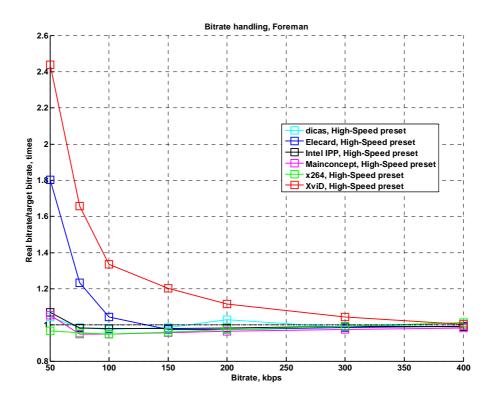


Figure 50. Bitrate Handling. Usage area "Video Conferences", "Foreman" sequence, High Speed" preset

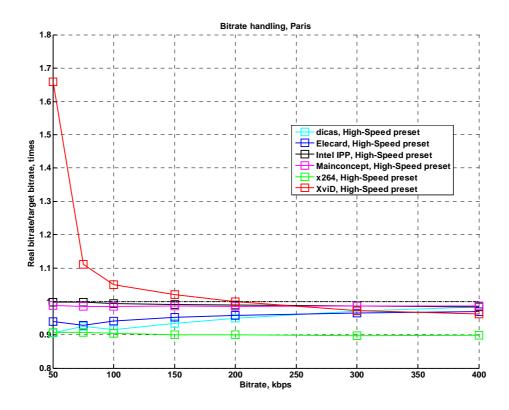


Figure 51. Bitrate Handling. Usage area "Video Conferences", "Paris" sequence, "High Speed" preset

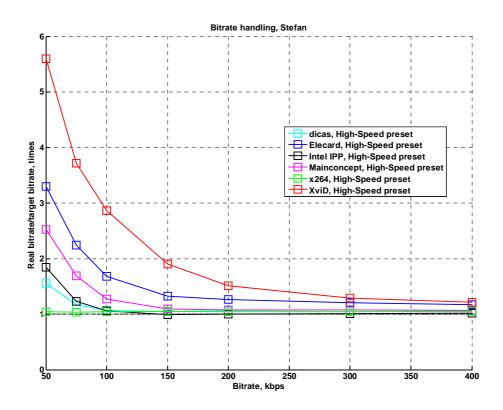


Figure 52. Bitrate Handling. Usage area "Video Conferences", "Stefan" sequence, "High Speed" preset

4.1.5 Relative Quality Analysis

Table 3 through Table 6 contain relative bitrate for the same quality for all the encoders.

The MainConcept codec is the leader for all presets according to all objective quality metrics, and it is followed by the x264 codec. The Intel IPP H.264 encoder holds third place. For High Speed preset the results of Elecard encoder are very close to Intel IPP H.264 encoder results. All H.264 encoders show better bitrate ratio comparing to XviD encoder using Y-SSIM as quality metric rather than Y-PSNR. This difference could be easily noted for dicas encoder – if using Y-PNSR it shows lower results than XviD, but using Y-SSIM it shows better results than XviD. The dicas encoder uses a tool called "HVSAQM" that highly adapts the contribution of the bits to the Human Visual System (HVS). It typically lowers the PSNR by up to 1db but greatly improves the subjectively perceptible.

Note, that each the number in tables below corresponds to some segment of bitrates (see Appendix 6. Figures Explanation for more details). Unfortunately, those segments can be rather different because of different quality of compared encoders. This fact can lead to some inadequate results in case of three and more codecs comparisons. This comparison technique will be improved in the future.

Table 3. Average bitrate ratio for a fixed output quality using videoconference sequences and the High Speed preset (Y-PSNR metric).

dicas	Elecard	IPP H.264	MainConcept	x264	XviD		
100.00%	84.06%	83.72%	56.63%	71.39%	91.64%		
118.96%	100.00%	98.30%	67.00%	84.99%	110.64%		
119.45%	101.73%	100.00%	69.33%	85.56%	110.77%		
176.59%	149.25%	144.25%	100.00%	124.20%	164.28%		
140.08%	117.66%	116.88%	80.52%	100.00%	127.54%		
109.12%	90.38%	90.28%	60.87%	78.41%	100.00%		
	dicas 100.00% 118.96% 119.45% 176.59% 140.08%	dicasElecard100.00%84.06%118.96%100.00%119.45%101.73%176.59%149.25%140.08%117.66%	dicasElecardIPP H.264100.00%84.06%83.72%118.96%100.00%98.30%119.45%101.73%100.00%176.59%149.25%144.25%140.08%117.66%116.88%	dicasElecardIPP H.264MainConcept100.00%84.06%83.72%56.63%118.96%100.00%98.30%67.00%119.45%101.73%100.00%69.33%176.59%149.25%144.25%100.00%140.08%117.66%116.88%80.52%	dicasElecardIPP H.264MainConceptx264100.00%84.06%83.72%56.63%71.39%118.96%100.00%98.30%67.00%84.99%119.45%101.73%100.00%69.33%85.56%176.59%149.25%144.25%100.00%124.20%140.08%117.66%116.88%80.52%100.00%		

Table 4.Average bitrate ratio for a fixed output quality usingvideoconference sequences and the High Speed preset (Y-SSIM metric).

	dicas	Elecard	IPP H.264	MainConcept	x264	XviD
dicas	100.00%	95.24%	97.37%	65.06%	70.38%	109.01%
Elecard	105.00%	100.00%	101.21%	66.94%	73.94%	115.43%
IPP H.264	102.70%	98.80%	100.00%	67.56%	72.04%	112.80%
MainConcept	153.71%	149.40%	148.01%	100.00%	104.42%	170.76%
x264	142.09%	135.24%	138.80%	95.77%	100.00%	153.54%
XviD	91.73%	86.63%	88.65%	58.56%	65.13%	100.00%


Table 5.Average bitrate ratio for a fixed output quality usingvideoconference sequences and the High Quality preset (Y-PSNR metric).

	dicas	IPP H.264	MainConcept	x264	XviD
dicas	100.00%	71.02%	56.67%	69.81%	87.91%
IPP H.264	140.80%	100.00%	84.81%	99.87%	126.34%
MainConcept	176.46%	117.90%	100.00%	121.17%	156.52%
x264	143.24%	100.13%	82.53%	100.00%	125.33%
XviD	113.76%	79.15%	63.89%	79.79%	100.00%

Table 6.	Average bitrate ratio for a fixed output quality using
videoconference	sequences and the High Quality preset (Y-SSIM metric).


	dicas	IPP H.264	MainConcept	x264	XviD
dicas	100.00%	82.13%	64.80%	69.06%	105.58%
IPP H.264	121.76%	100.00%	83.07%	83.91%	130.94%
MainConcept	154.33%	120.38%	100.00%	102.75%	164.22%
x264	144.80%	119.17%	97.32%	100.00%	151.57%
XviD	94.71%	76.37%	60.89%	65.98%	100.00%

Figure 53 through Figure 56 visualize data in the tables above. Each line in those figures corresponds to one codec. Values in vertical axis are average relative bitrate comparing to the codecs in horizontal axis. The lower bitrate is the better relative results have the codec.

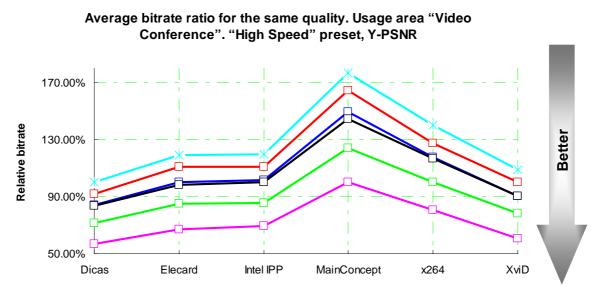

-X-Dicas -D-Elecard -D-Intel IPP -D-MainConcept -D-x264 -D-XviD


Figure 53. Average bitrate ratio for a fixed output quality using videoconference sequences and the High Speed preset (Y-PSNR metric).

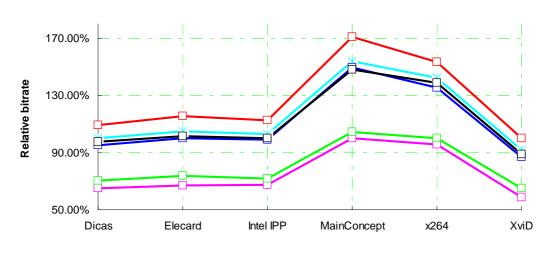

Average bitrate ratio for the same quality. Usage area "Video Conference". "High Speed" preset, Y-SSIM

-X-Dicas -D-Elecard -D-Intel IPP -D-MainConcept -D-x264 -D-XviD


Figure 54. Average bitrate ratio for the same quality. Usage area "Video Conferences". "High Speed" preset, Y-SSIM.

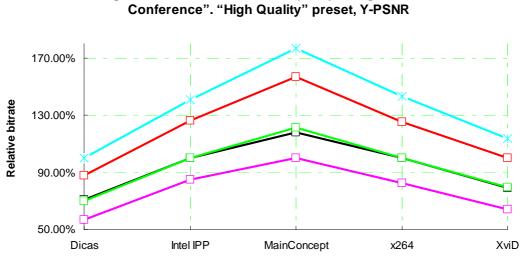

Average bitrate ratio for the same quality. Usage area "Video

-X-Dicas - Intel IPP - MainConcept - x264 - XviD

Figure 55. Average bitrate ratio for the same quality. Usage area "Video Conferences". "High Quality" preset, Y-PSNR.

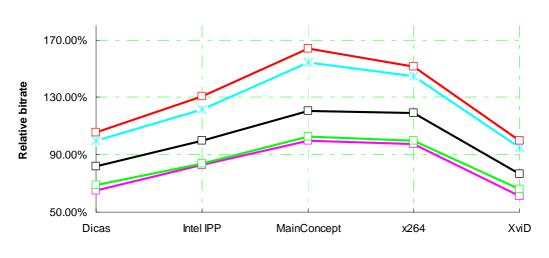

Average bitrate ratio for the same quality. Usage area "Video Conference". "High Quality" preset, Y-SSIM

Figure 56. Average bitrate ratio for the same quality. Usage area "Video Conferences". "High Quality" preset, Y-SSIM.

⁻X-Dicas -D-Intel IPP -D-MainConcept -X264 -D-XviD

4.2 Movies

4.2.1 RD Curves

4.2.1.1 High Quality Preset

The High Quality preset results for each sequence are presented in Figure 57 through Figure 64. The first four pictures show the Y-PSNR results and the last four pictures show the Y-SSIM results. Used metric significantly influence on results: leader of PSNR metric is MainConcept, leader of SSIM is x264. Using PSNR as standard of comparison dicas encoder (with HVSAQM enabled) demonstrates the lowest quality among H.264 encoders. Intel IPP H.264 encoder is better than dicas and worth than x264 and MainConcept.

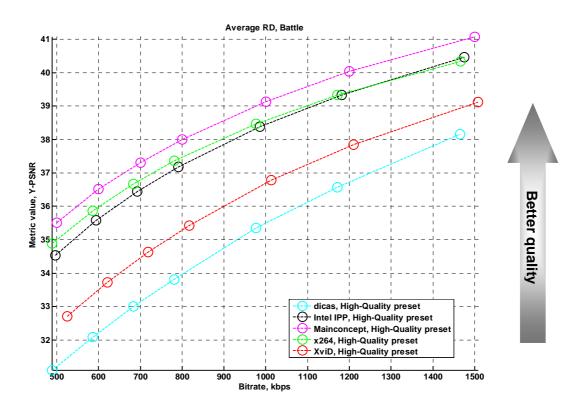


Figure 57. Bitrate/Quality. Usage area "Movies", "Battle" sequence, "High Quality" preset, Y-PSNR

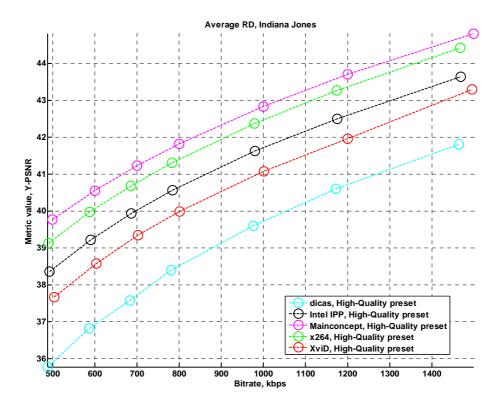


Figure 58. Bitrate/Quality. Usage area "Movies", "Indiana Jones" sequence, "High Quality" preset, Y-PSNR

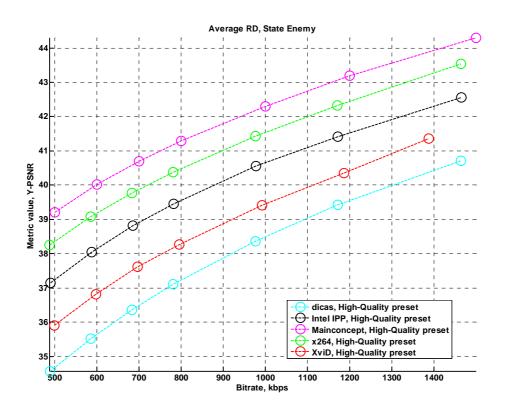


Figure 59. Bitrate/Quality. Usage area "Movies", "State Enemy" sequence, "High Quality" preset, Y-PSNR

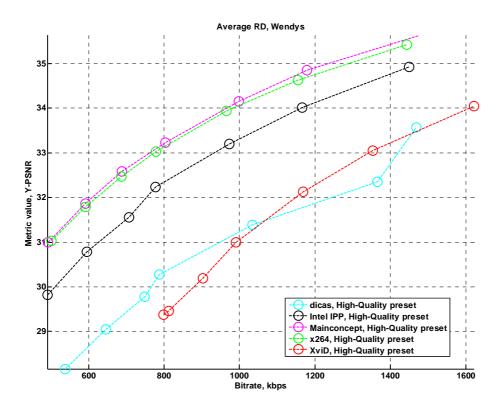


Figure 60. Bitrate/Quality. Usage area "Movies", "Wendys" sequence, "High Quality" preset, Y-PSNR

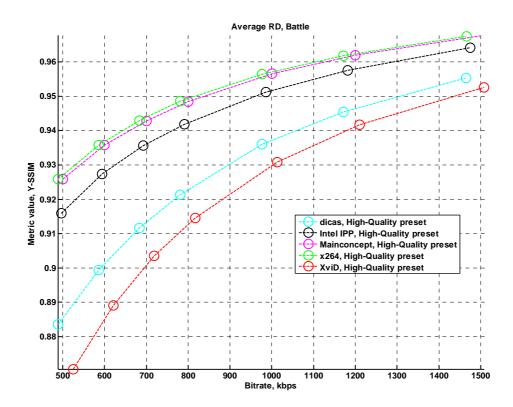


Figure 61. Bitrate/Quality. Usage area "Movies", "Battle" sequence, "High Quality" preset, Y-SSIM

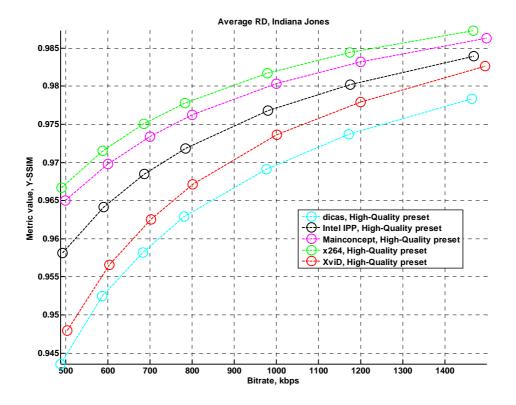


Figure 62. Bitrate/Quality. Usage area "Movies", "Indiana Jones" sequence, "High Quality" preset, Y-SSIM

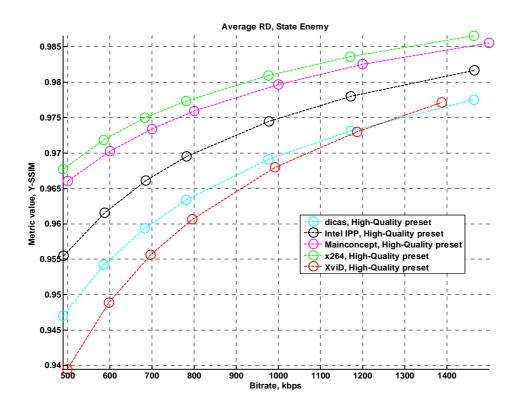


Figure 63. Bitrate/Quality. Usage area "Movies", "State Enemy" sequence, "High Quality" preset, Y-SSIM

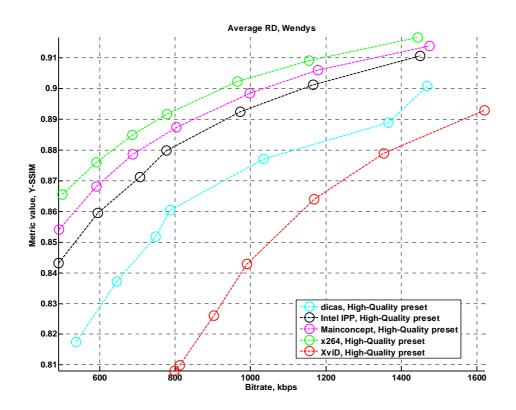


Figure 64. Bitrate/Quality. Usage area "Movies", "Wendys" sequence, "High Quality" preset, Y-SSIM

4.2.1.2 High Speed Preset

The RD curves for the High Speed preset are shown in Figure 65 through Figure 72. The situation is similar to High Quality preset: leader is MainConcept when PSNR is used and x264 when SSIM is used. Third place have Intel IPP H.264 codecs, followed by Elecard and dicas encoders. Note, that dicas encoder has unstable results at "Wendys" video sequence.

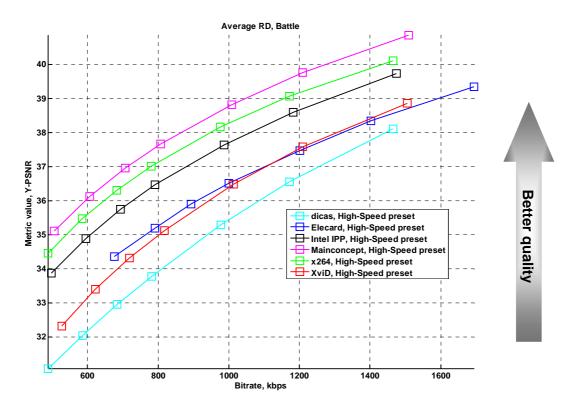


Figure 65. Bitrate/Quality. Usage area "Movies", "Battle" sequence, "High Speed" preset, Y-PSNR

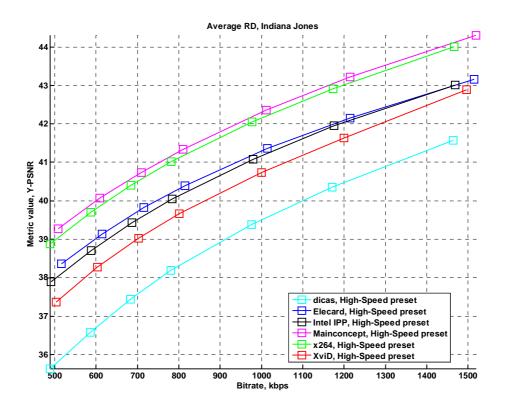


Figure 66. Bitrate/Quality. Usage area "Movies", "Indiana Jones" sequence, "High Speed" preset, Y-PSNR

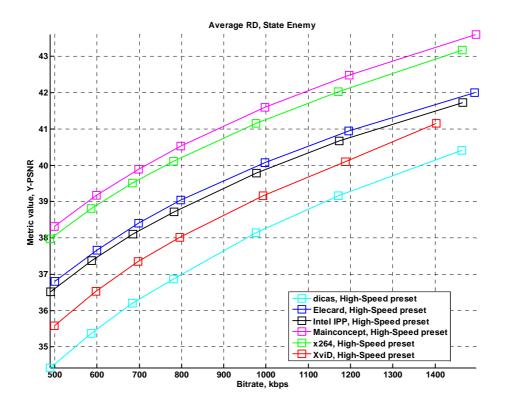


Figure 67. Bitrate/Quality. Usage area "Movies", "State Enemy" sequence, "High Speed" preset, Y-PSNR

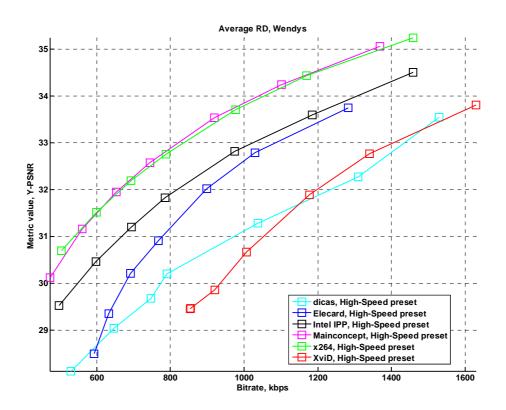


Figure 68. Bitrate/Quality. Usage area "Movies", "Wendys" sequence, "High Speed" preset, Y-PSNR

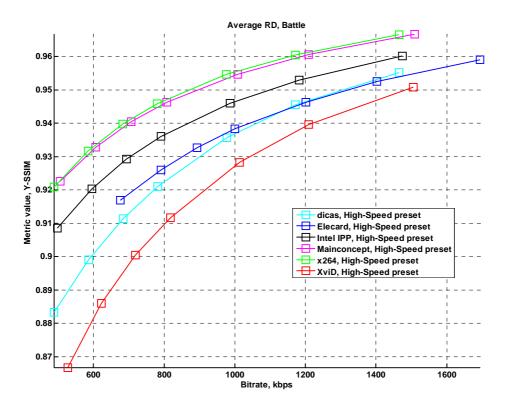


Figure 69. Bitrate/Quality. Usage area "Movies", "Battle" sequence, "High Speed" preset, Y-SSIM

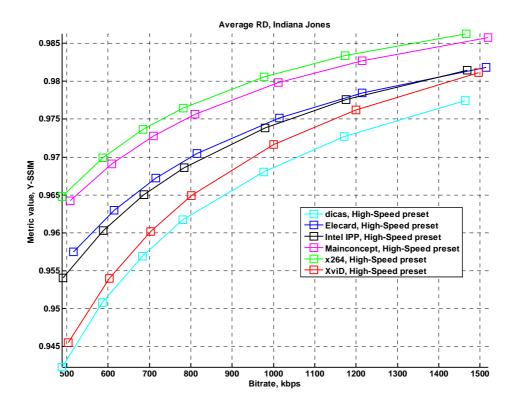


Figure 70. Bitrate/Quality. Usage area "Movies", "Indiana Jones" sequence, "High Speed" preset, Y-SSIM

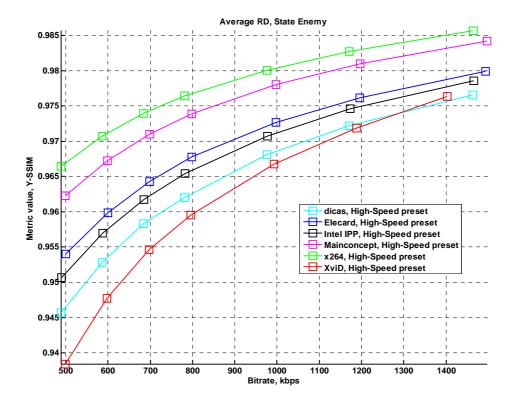


Figure 71. Bitrate/Quality. Usage area "Movies", "State Enemy" sequence, "High Speed" preset, Y-SSIM

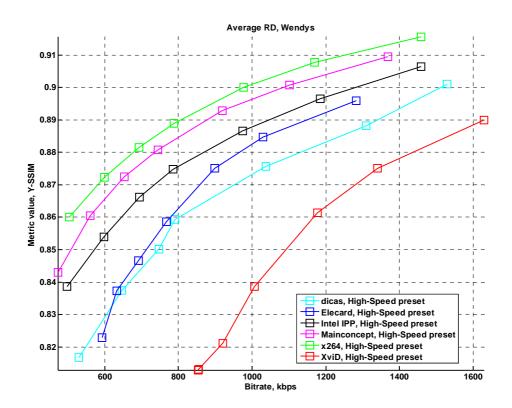


Figure 72. Bitrate/Quality. Usage area "Movies", "Wendys" sequence, "High Speed" preset, Y-SSIM

4.2.2 Encoding Speed

4.2.2.1 High Quality Preset

Absolute speed results are presented in Figure 73 through Figure 80.

The fastest encoder with High Quality preset is XviD, the slowest one (best fitted our speed requirements is x264). The only exception is "Wendys" movie, where XviD is relatively slower and demonstrates not stable encoding time.

The fastest encoder with High Speed preset is Elecard, the slowest one is x264 again. Note unstable results of Elecard encoder at "State Enemy" sequence.

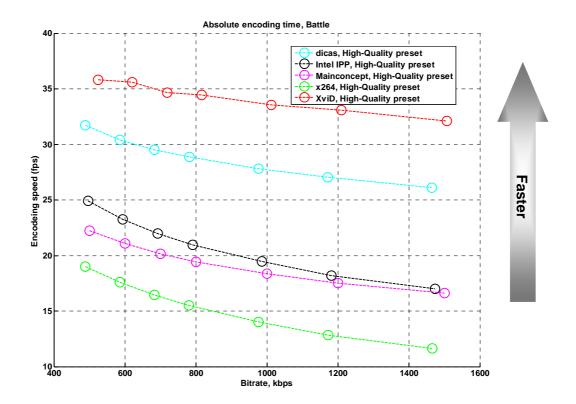


Figure 73. Encoding speed. Usage area "Movies", "Battle" sequence, "High Quality" preset

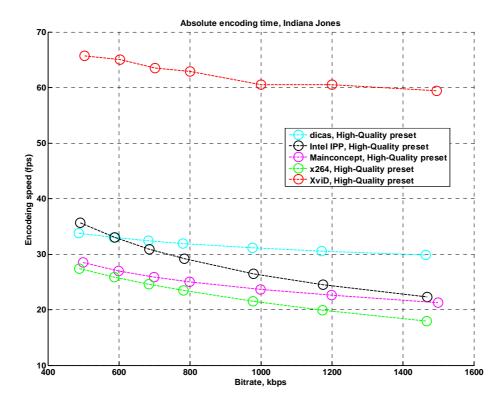


Figure 74. Encoding speed. Usage area "Movies", "Indiana Jones" sequence, "High Quality" preset

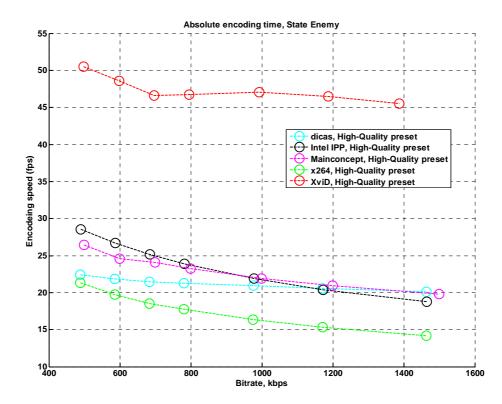


Figure 75. Encoding speed. Usage area "Movies", "State Enemy" sequence, "High Quality" preset

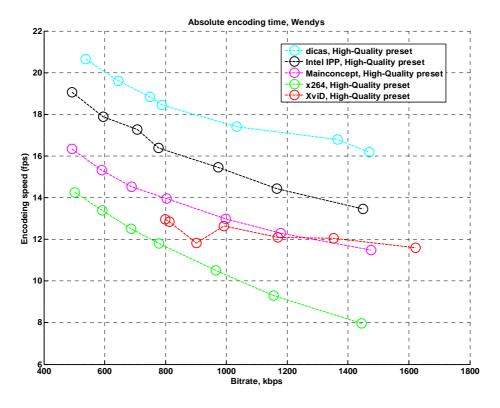


Figure 76. Encoding speed. Usage area "Movies", "Wendys" sequence, "High Quality" preset

4.2.2.2 High Speed Preset

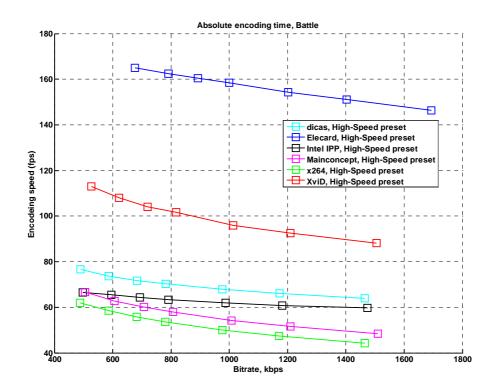


Figure 77. Encoding speed. Usage area "Movies", "Battle" sequence, "High Speed" preset

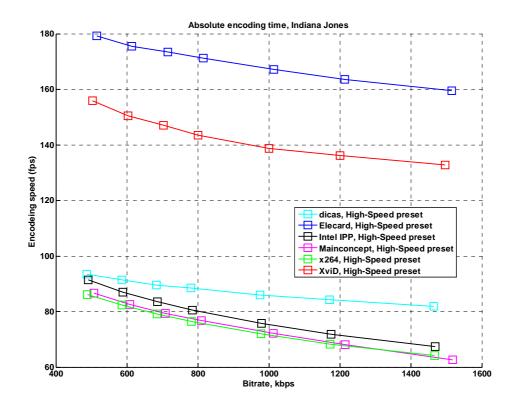


Figure 78. Encoding speed. Usage area "Movies", "Indiana Jones" sequence, "High Speed" preset

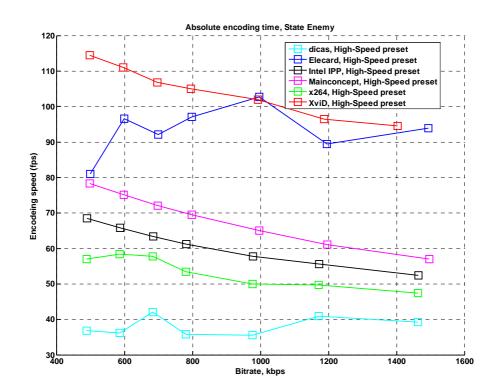


Figure 79. Encoding speed. Usage area "Movies", "State Enemy" sequence, "High Speed" preset

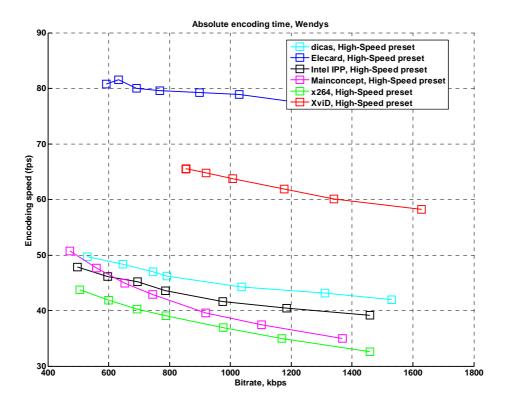


Figure 80. Encoding speed. Usage area "Movies", "Wendys" sequence, "High Speed" preset

4.2.3 Speed/Quality Tradeoff

Detailed descriptions of the speed/quality trade-off graphs can be found in Appendix 6. Figures Explanation. Sometimes codec results are not present in the particular graph. The reason for that are extremely poor results of the codec. Its RD curve has no intersection with reference's RD curve.

The speed/quality trade-off graphs simultaneously show relative quality and encoding speed for the encoders tested in this comparison. Again, XviD is the reference codec with both quality and speed normalized to unity for all of the below graphs. The terms "better" and "worse" are used to compare codecs in the same manner as in previous portions of this comparison.

Please note that the averaging method among all sequences suppose that all codecs have the results for each sequence. When it's not the case, then only existing results are taking into account.

Figure 81 through Figure 90 show results for the High Quality preset. Results differ for PSNR and SSIM metrics. x264 is worse and slower than MainConcept when PSNR metric is used. Another comparable pair of encoders is XviD and dicas: dicas demonstrates worse quality and is slower than XviD at average when PSNR metric is used (the dicas codec was provided with HVSAQM algorithm which countervails PSNR).

SSIM results at average are more balanced: there are no compatible codecs. The slowest and the best one codec is x264, the fastest one is dicas.

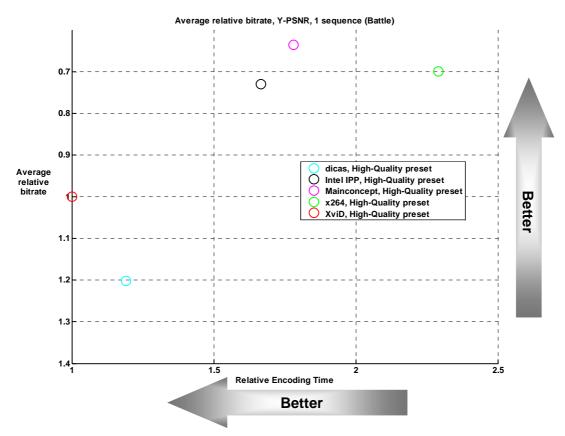


Figure 81. Speed/Quality tradeoff. Usage area "Movies", "Battle" sequence, "High Quality" preset, Y-PSNR

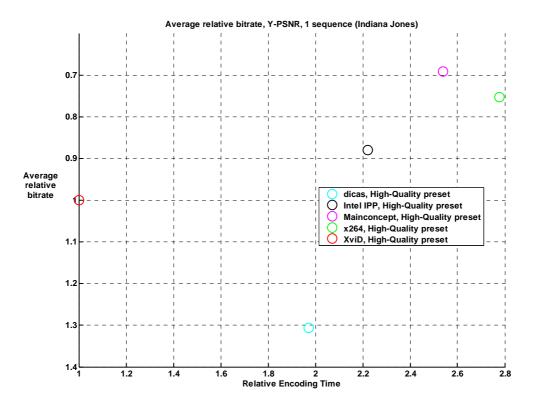


Figure 82. Speed/Quality tradeoff. Usage area "Movies", "Indiana Jones" sequence, "High Quality" preset, Y-PSNR

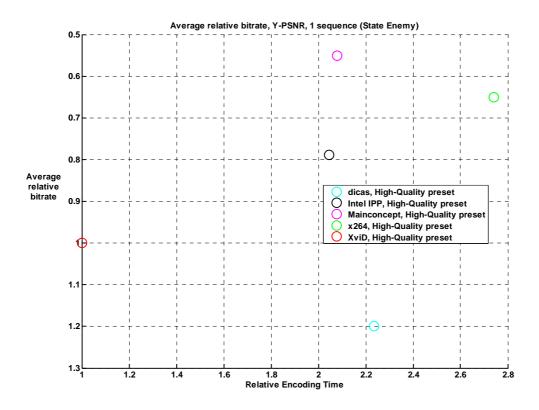


Figure 83. Speed/Quality tradeoff. Usage area "Movies", "State Enemy" sequence, "High Quality" preset, Y-PSNR

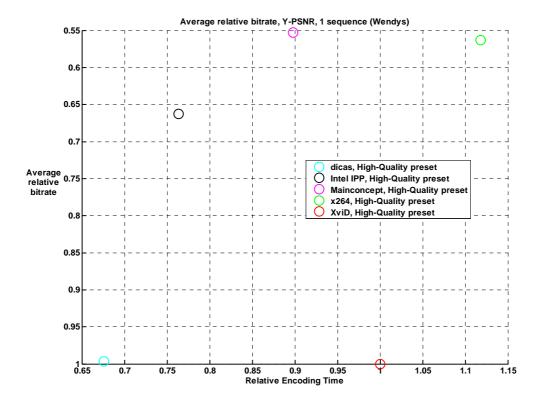


Figure 84. Speed/Quality tradeoff. Usage area "Movies", "Wendys" sequence, "High Quality" preset, Y-PSNR

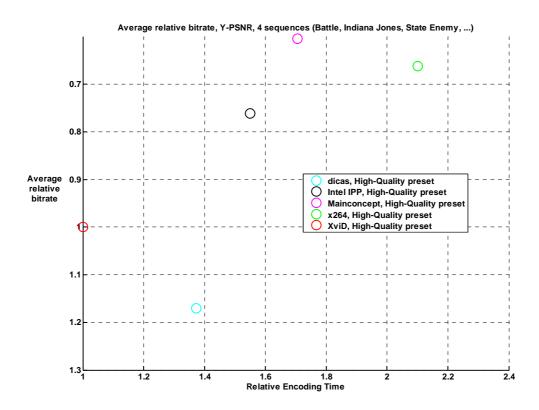


Figure 85. Speed/Quality tradeoff. Usage area "Movies", all sequences, "High Quality" preset, Y-PSNR

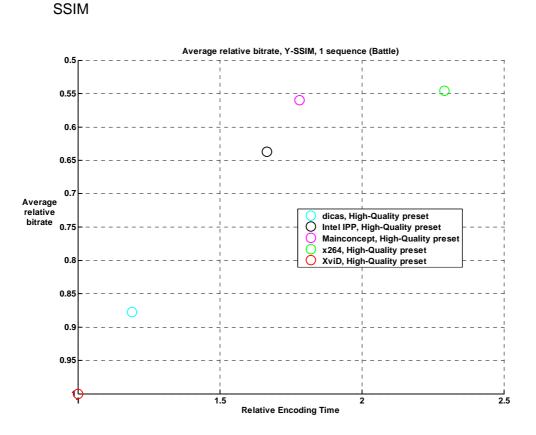


Figure 86. Speed/Quality tradeoff. Usage area "Movies", "Battle" sequence, "High Quality" preset, Y-SSIM

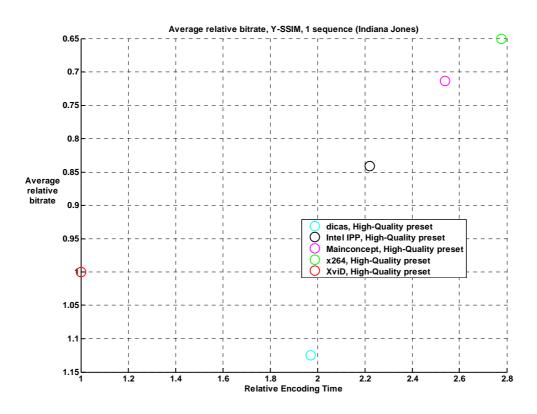


Figure 87. Speed/Quality tradeoff. Usage area "Movies", "Indiana Jones" sequence, "High Quality" preset, Y-SSIM

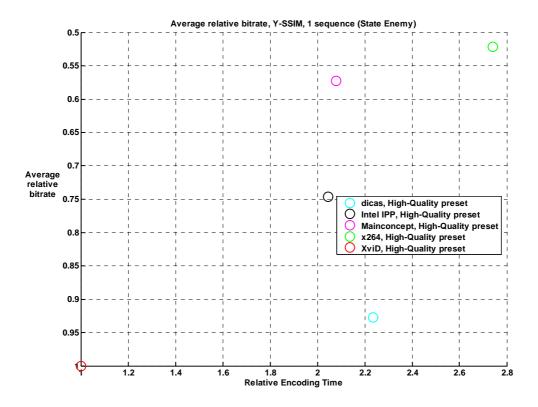


Figure 88. Speed/Quality tradeoff. Usage area "Movies", "State Enemy" sequence, "High Quality" preset, Y-SSIM

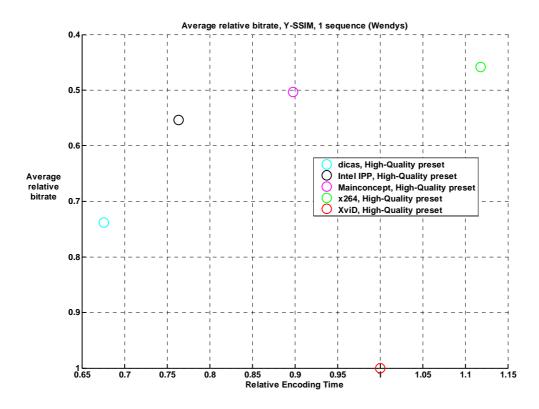


Figure 89. Speed/Quality tradeoff. Usage area "Movies", "Wendys" sequence, "High Quality" preset, Y-SSIM

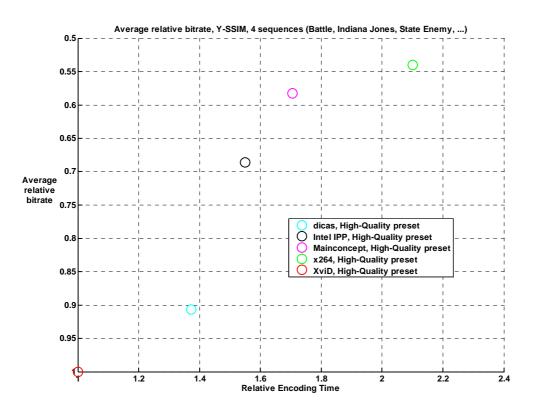


Figure 90. Speed/Quality tradeoff. Usage area "Movies", all sequences, "High Quality" preset, Y-SSIM

4.2.3.1 High Speed Preset

Figure 91 through Figure 100 show results for the High Speed preset. In considering the cumulative results for all sequences, it becomes apparent that the Elecard encoder is better than the XviD codec. The x264 and MainConcept encoders results depend on used metric similar to High Quality results. Another compatible pair is dicas and Intel encoder, where dicas is totally worse than Intel.

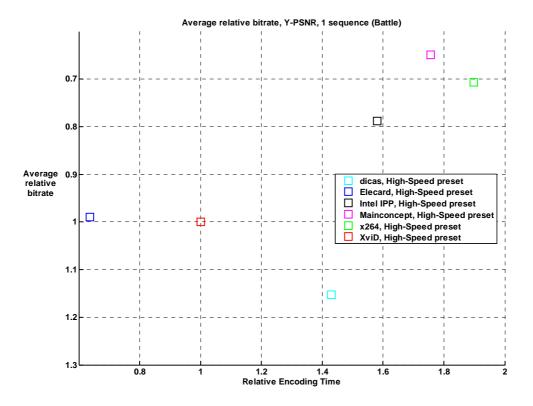


Figure 91. Speed/Quality tradeoff. Usage area "Movies", "Battle" sequence, "High Speed" preset, Y-PSNR

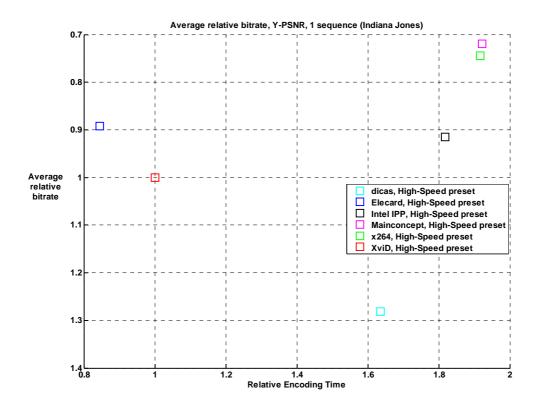


Figure 92. Speed/Quality tradeoff. Usage area "Movies", "Indiana Jones" sequence, "High Speed" preset, Y-PSNR

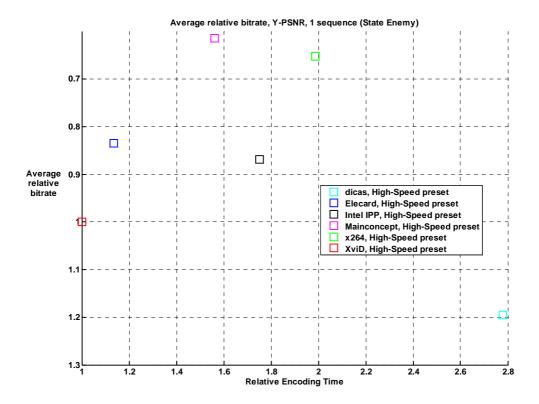


Figure 93. Speed/Quality tradeoff. Usage area "Movies", "State Enemy" sequence, "High Speed" preset, Y-PSNR

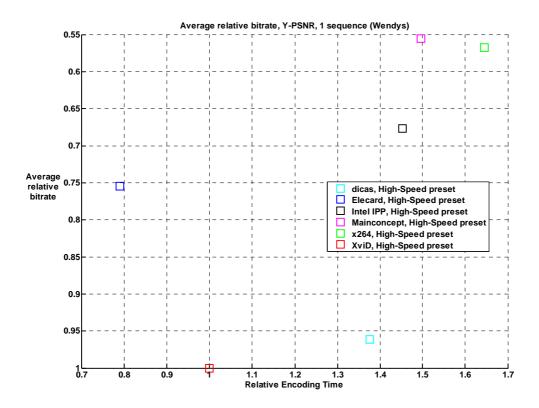


Figure 94. Speed/Quality tradeoff. Usage area "Movies", "Wendys" sequence, "High Speed" preset, Y-PSNR

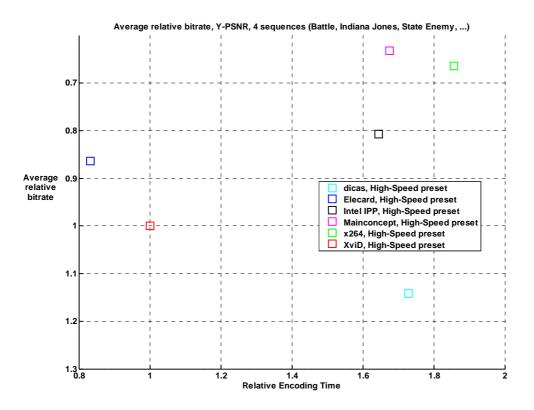


Figure 95. Speed/Quality tradeoff. Usage area "Movies", all the sequences, "High Speed" preset, Y-PSNR

SSIM

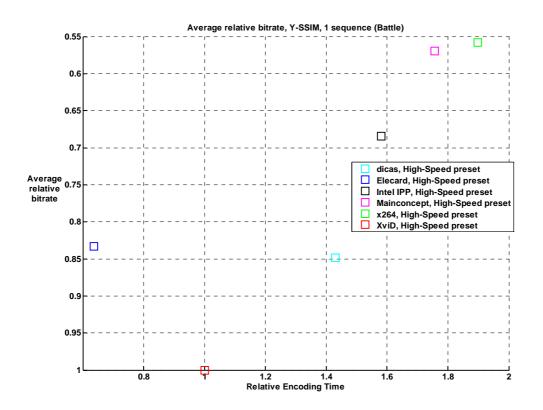


Figure 96. Speed/Quality tradeoff. Usage area "Movies", "Battle" sequence, "High Speed" preset, Y-SSIM

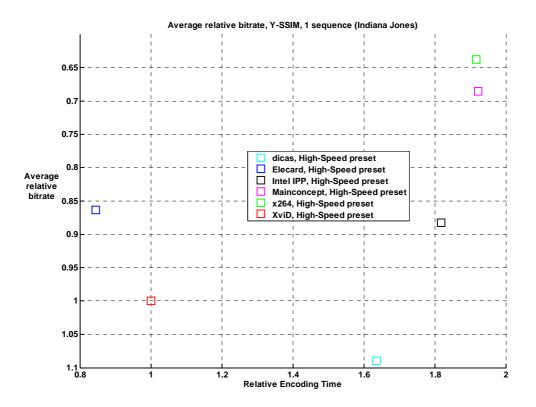


Figure 97. Speed/Quality tradeoff. Usage area "Movies", "Indiana Jones" sequence, "High Speed" preset, Y-SSIM

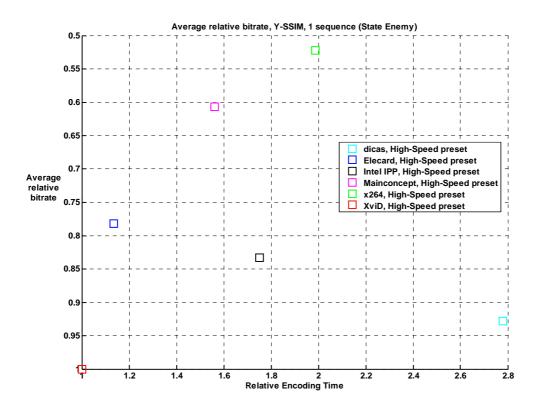


Figure 98. Speed/Quality tradeoff. Usage area "Movies", "State Enemy" sequence, "High Speed" preset, Y-SSIM

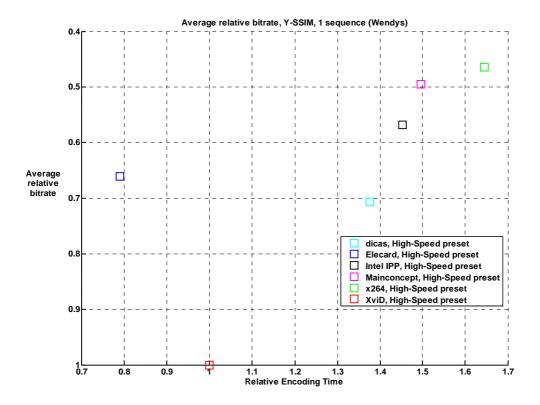


Figure 99. Speed/Quality tradeoff. Usage area "Movies", "Wendys" sequence, "High Speed" preset, Y-SSIM

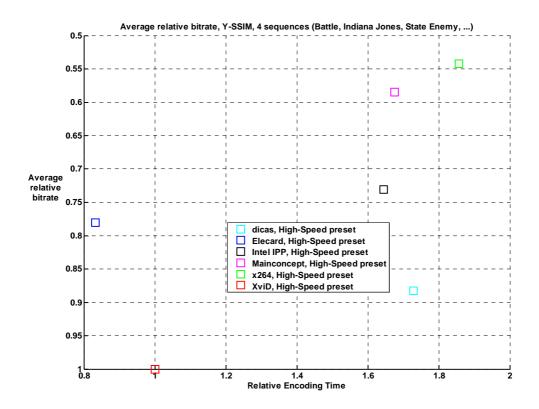


Figure 100. Speed/Quality tradeoff. Usage area "Movies", all sequences, "High Speed" preset, Y-SSIM

4.2.4 Bitrate Handling

Encoders with High Quality presets demonstrate good bitrate keeping at all sequences except XviD and dicas at "Wendys" sequence (they increase bitrate).

With High Speed preset Elecard encoder demonstrates bitrate increasing at "Battle" and "Wendys" sequences.

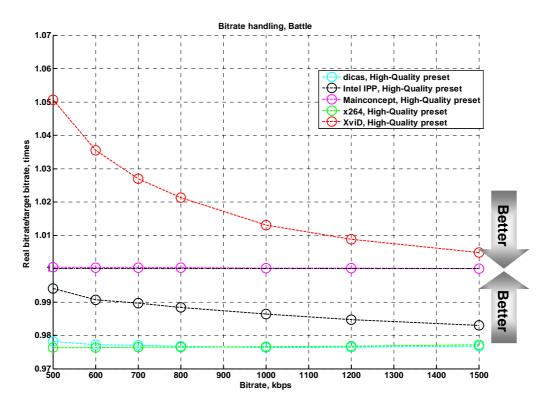


Figure 101. Bitrate Handling. Usage area "Movies", "Battle" sequence, "High Quality" preset

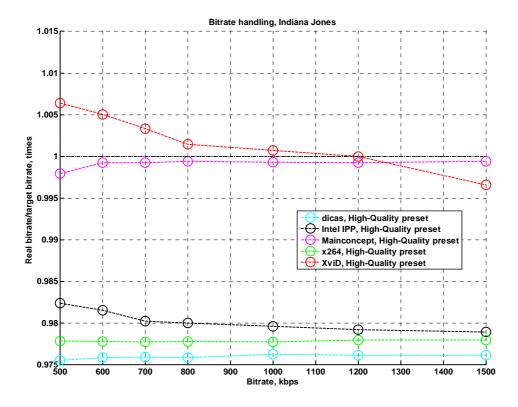


Figure 102. Bitrate Handling. Usage area "Movies", "Indiana Jones" sequence, "High Quality" preset

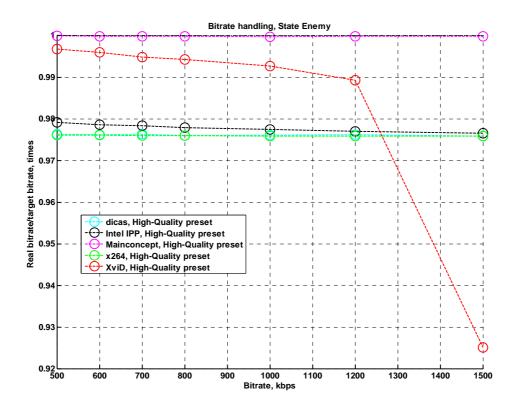


Figure 103. Bitrate Handling. Usage area "Movies", "State Enemy" sequence, "High Quality" preset


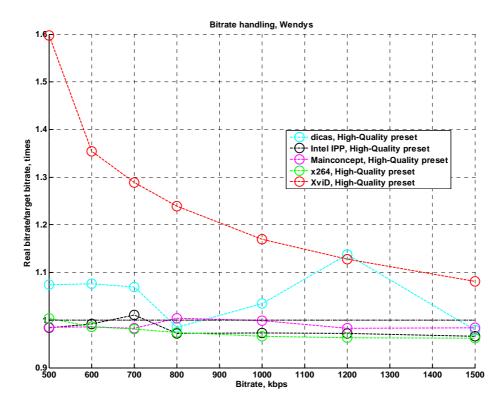


Figure 104. Bitrate Handling. Usage area "Movies", "Wendys" sequence, "High Quality" preset

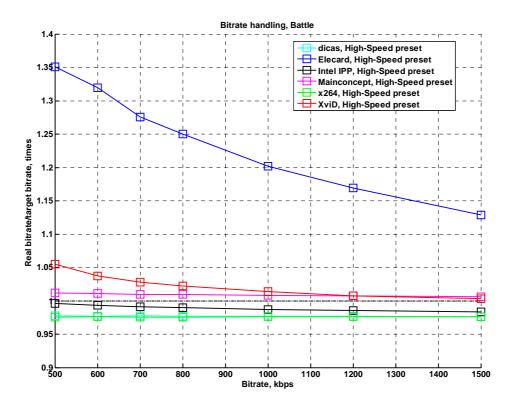

4.2.4.1 High Speed Preset

Figure 105. Bitrate Handling. Usage area "Movies", "Battle" sequence, "High Speed" preset

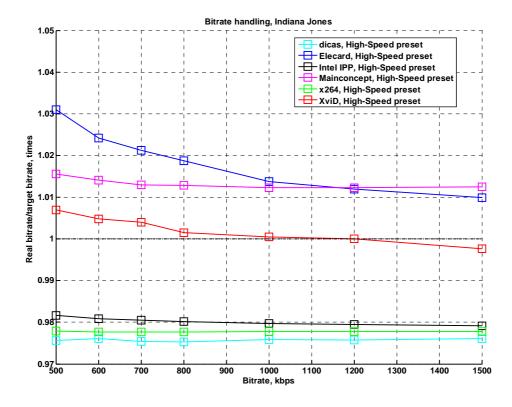


Figure 106. Bitrate Handling. Usage area "Movies", "Indiana Jones" sequence, "High Speed" preset

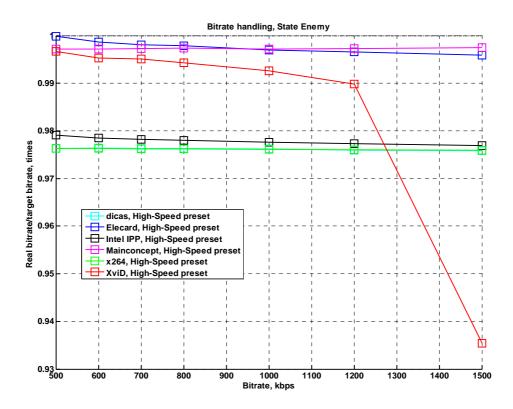


Figure 107. Bitrate Handling. Usage area "Movies", "State Enemy" sequence, "High Speed" preset

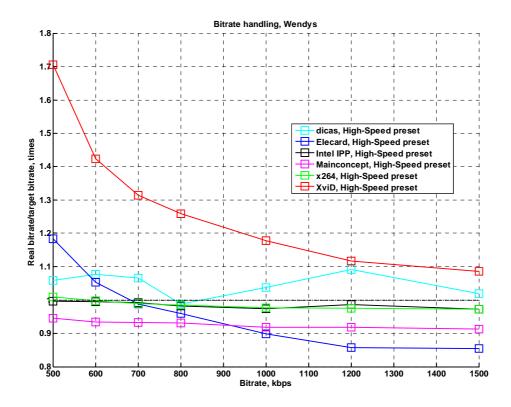


Figure 108. Bitrate Handling. Usage area "Movies", "Wendys" sequence, "High Speed" preset

4.2.5 Relative Quality Analysis

Table 7 through Table 10 show relative bitrates for a fixed quality output for all codecs and presets. Note that these tables do not include information about the speed of the encoder.

Note, that each the number in tables below corresponds to some segment of bitrates (see Appendix 6. Figures Explanation for more details). Unfortunately, those segments can be rather different because of different quality of compared encoders. This fact can lead to some inadequate results in case of three and more codecs comparisons. This comparison technique will be improved in the future.

Consider the High Speed preset (Y-PSNR results in Table 7, Y-SSIM results in Table 8). Note that XviD results depend on used quality metric. At average, there are two leaders: x264 and MainConcept encoders.

Table 9 and Table 10 present the High Quality preset results for the Y-PSNR and Y-SSIM quality metrics, respectively. Results are similar to High Speed preset: leaders are x264 and MainConcept depending on used quality metric (difference is 18% of bitrate for the same quality).

Table 7.Average bitrate ratio for the same quality. Usage area "Movie"."High Speed" preset, Y-PSNR.

	Dicas	Elecard	IPP H.264	MainConcept	x264	XviD
Dicas	100%	76%	70%	55%	57%	88%
Elecard	132%	100%	94%	73%	77%	116%
IPP H.264	143%	107%	100%	77%	81%	124%
MainConcept	182%	138%	129%	100%	105%	158%
x264	175%	131%	123%	95%	100%	151%
XviD	114%	86%	81%	63%	66%	100%

Table 8.Average bitrate ratio for the same quality. Usage area "Movie"."High Speed" preset, Y-SSIM.

	Dicas	Elecard	IPP H.264	MainConcept	x264	XviD
Dicas	100%	87%	82%	64%	59%	113%
Elecard	115%	100%	94%	74%	68%	128%
IPP H.264	123%	106%	100%	78%	72%	137%
MainConcept	156%	136%	128%	100%	92%	171%
x264	170%	147%	140%	109%	100%	184%
XviD	88%	78%	73%	59%	54%	100%


Table 9.Average bitrate ratio for the same quality. Usage area "Movie"."High Quality" preset, Y-PSNR.

	Dicas	IPP H.264	MainConcept	x264	XviD
Dicas	100%	64%	51%	55%	85%
IPP H.264	155%	100%	79%	87%	131%
MainConcept	197%	126%	100%	110%	165%
x264	180%	115%	91%	100%	151%
XviD	117%	76%	60%	66%	100%

right quality preset, 1-00im.						
	Dicas	IPP H.264	MainConcept	x264	XviD	
Dicas	100%	74%	62%	57%	110%	
IPP H.264	135%	100%	84%	77%	146%	
MainConcept	162%	119%	100%	92%	172%	
x264	177%	129%	109%	100%	185%	
XviD	91%	69%	58%	54%	100%	


Table 10.Average bitrate ratio for the same quality. Usage area "Movie"."High Quality" preset, Y-SSIM.

Figure 109 through Figure 112 visualize data in the tables above. Each line in those figures corresponds to one codec. Values in vertical axis are average relative bitrate comparing to the codecs in horizontal axis. The lower bitrate is the better relative results have the codec.

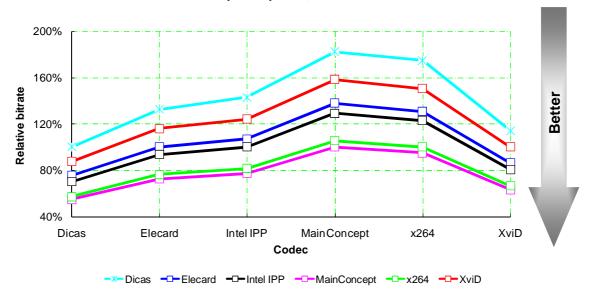

Average bitrate ratio for the same quality. Usage area "Movie". "High Speed" preset, Y-PSNR

Figure 109. Average bitrate ratio for the same quality. Usage area "Movie". "High Speed" preset, Y-PSNR.

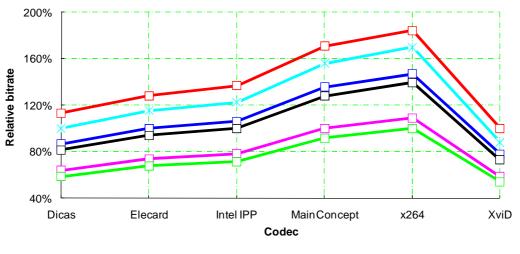

Average bitrate ratio for the same quality. Usage area "Movie". "High Speed" preset, Y-SSIM

Figure 110. Average bitrate ratio for the same quality. Usage area "Movie". "High Speed" preset, Y-SSIM.

Average bitrate ratio for the same quality. Usage area "Movie". "High Quality" preset, Y-PSNR


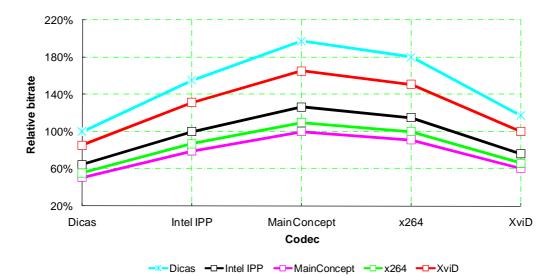


Figure 111. Average bitrate ratio for the same quality. Usage area "Movie". "High Quality" preset, Y-PSNR.

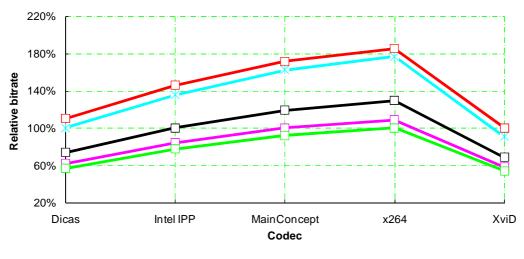

Average bitrate ratio for the same quality. Usage area "Movie". "High Quality" preset, Y-SSIM

-X-Dicas -D-Intel IPP -D-MainConcept -D-x264 -D-XviD

Figure 112. Average bitrate ratio for the same quality. Usage area "Movie". "High Quality" preset, Y-SSIM.

4.3 HDTV

4.3.1 RD Curves

4.3.1.1 High Quality Preset

Figure 113 through Figure 120 depict the RD curves for the High Quality preset in the case of HDTV. The results for this category are similar to those of the other categories. The first three encoders are the same: MainConcept, x264 and Intel IPP H.264. Using Y-PSNR as metric for analysis – MainConcept has the best quality at average, but when using Y-SSIM – x264 are closer to MainConcept and at "Stockholm" and "Troy" sequences x264 has the best results. The positions for Intel IPP H.264 and x264 strongly depend on objective quality metric – for Y-PSNR Intel IPP H.264 is better than x264 at three sequences at medium and high bitrates ("Mobile Calendar", "Pedestrian Area" and "Stockholm"), and x264 is better at "Troy" sequence for all the bitrates. And for Y-SSIM Intel IPP H.264 is slightly better than x264 only at "Pedestrian Area" sequence. The dicas encoder (using HVSAQM) shows results better than XviD encoder only at "Pedestrian Area" sequence at Y-PSNR and "Pedestrian Area" and "Troy" sequences at Y-SSIM.

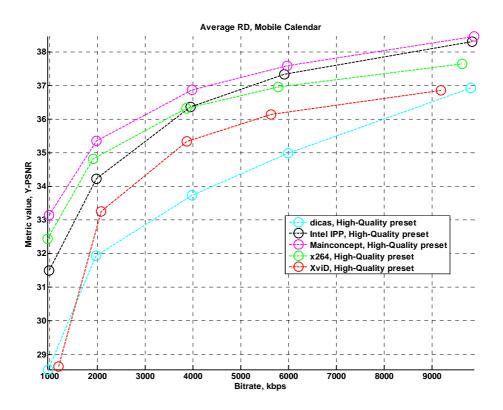


Figure 113. Bitrate/Quality. Usage area "HDTV", "Mobile Calendar" sequence, "High Quality" preset, Y-PSNR

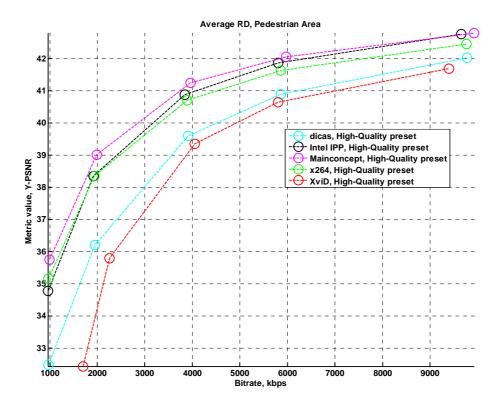


Figure 114. Bitrate/Quality. Usage area "HDTV", "Pedestrian Area" sequence, "High Quality" preset, Y-PSNR

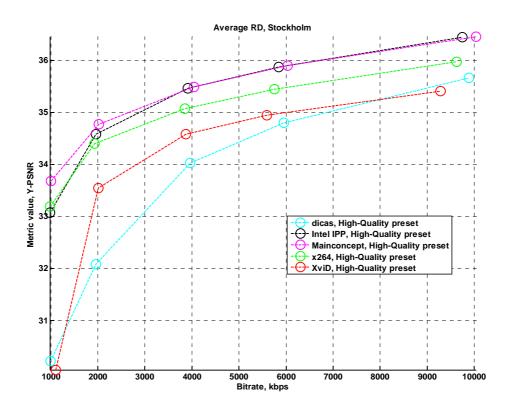


Figure 115. Bitrate/Quality. Usage area "HDTV", "Stockholm" sequence, "High Quality" preset, Y-PSNR

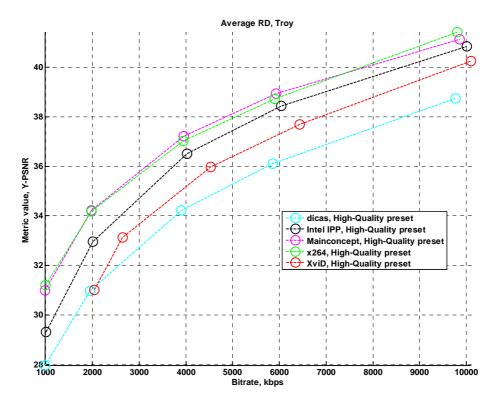


Figure 116. Bitrate/Quality. Usage area "HDTV", "Troy" sequence, "High Quality" preset, Y-PSNR

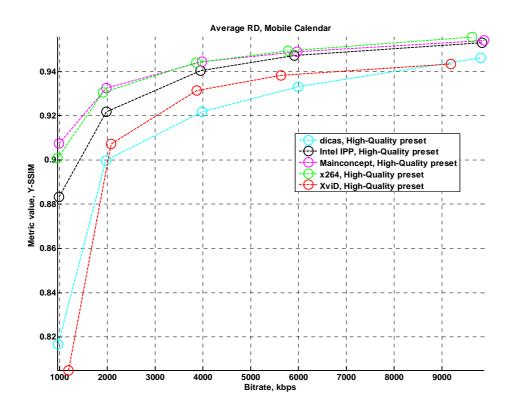


Figure 117. Bitrate/Quality. Usage area "HDTV", "Mobile Calendar" sequence, "High Quality" preset, Y-SSIM

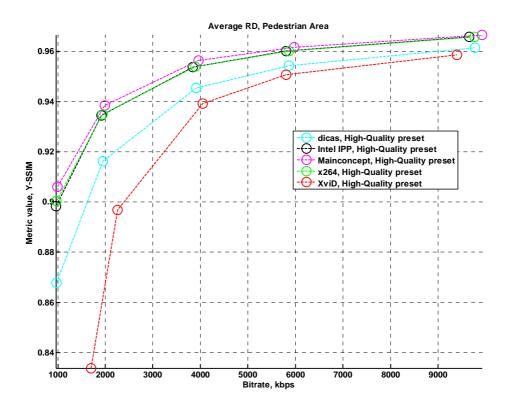


Figure 118. Bitrate/Quality. Usage area "HDTV", "Pedestrian Area" sequence, "High Quality" preset, Y-SSIM

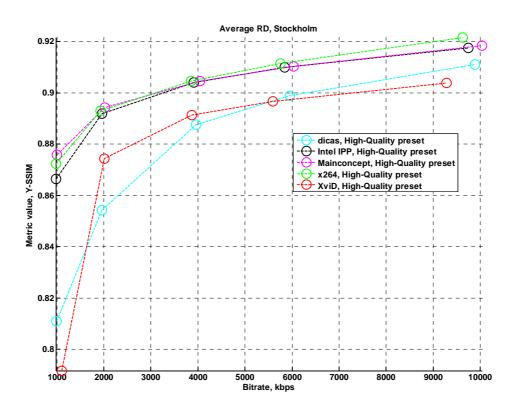


Figure 119. Bitrate/Quality. Usage area "HDTV", "Stockholm" sequence, "High Quality" preset, Y-SSIM

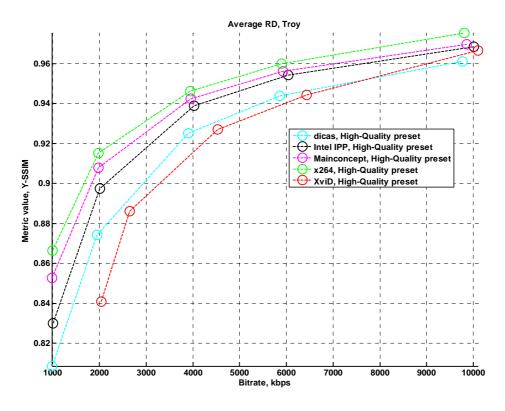


Figure 120. Bitrate/Quality. Usage area "HDTV", "Troy" sequence, "High Quality" preset, Y-SSIM

4.3.1.2 High Speed Preset

Figure 121 through Figure 128 depict the RD curves for encoders using the High Speed preset.

When using Y-PSNR metric – the only leader is MainConcept encoder and Intel IPP H.264 and x264 shares second place. For "Pedestrian Area" and "Stockholm" sequences Intel IPP H.264 shows higher result than x264, and for "Mobile Calendar" and "Troy" sequences vice versa. Elecard encoder shows the third result at average both for Y-PSNR and Y-SSIM metrics, the only sequence where dicas encoder (using HVSAQM) shows better results than Elecard encoder is "Pedestrian Area" for Y-SSIM and very close results for Y-PSNR. XviD encoder demonstrates higher quality than dicas encoder for "Mobile Calendar" and "Troy" sequences at Y-PSNR, and lower results at "Pedestrian Area" for all bitrates and "Stockholm" sequence at high bitrates. For Y-SSIM metric dicas encoder is better than XviD encoder at average.

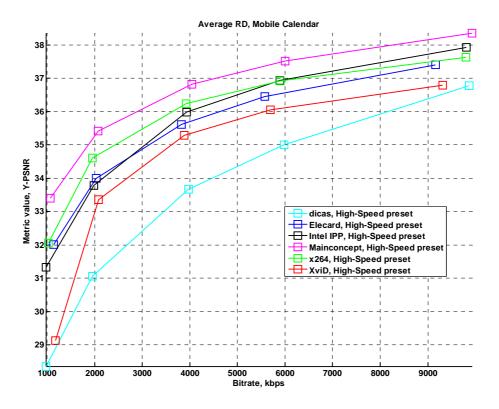


Figure 121. Bitrate/Quality. Usage area "HDTV", "Mobile Calendar" sequence, "High Speed" preset, Y-PSNR

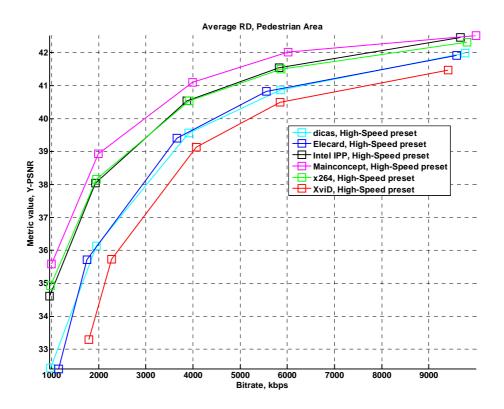


Figure 122. Bitrate/Quality. Usage area "HDTV", "Pedestrian Area" sequence, "High Speed" preset, Y-PSNR

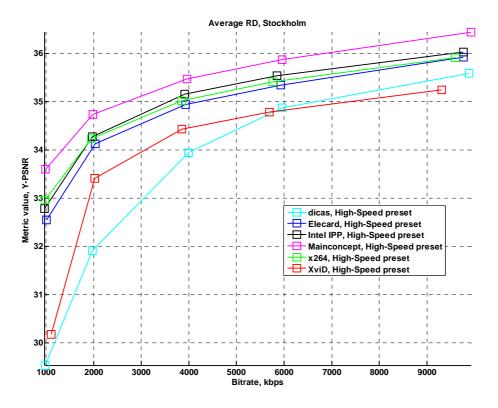


Figure 123. Bitrate/Quality. Usage area "HDTV", "Stockholm" sequence, "High Speed" preset, Y-PSNR

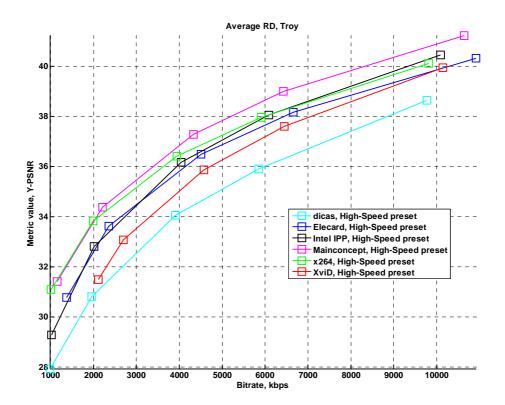


Figure 124. Bitrate/Quality. Usage area "HDTV", "Troy" sequence, "High Speed" preset, Y-PSNR

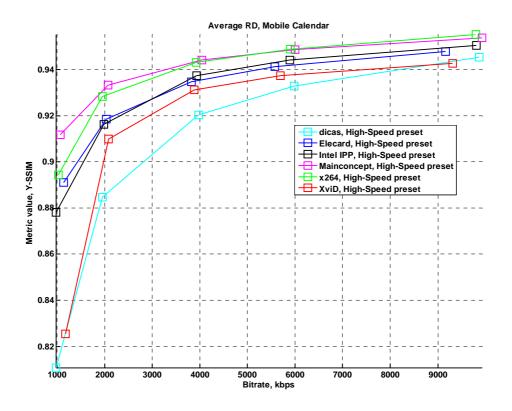


Figure 125. Bitrate/Quality. Usage area "HDTV", "Mobile Calendar" sequence, "High Speed" preset, Y-SSIM

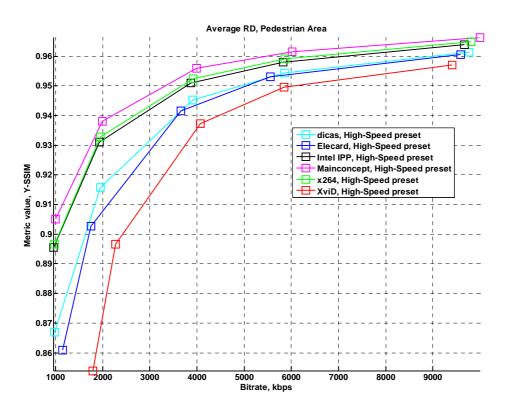


Figure 126. Bitrate/Quality. Usage area "HDTV", "Pedestrian Area" sequence, "High Speed" preset, Y-SSIM

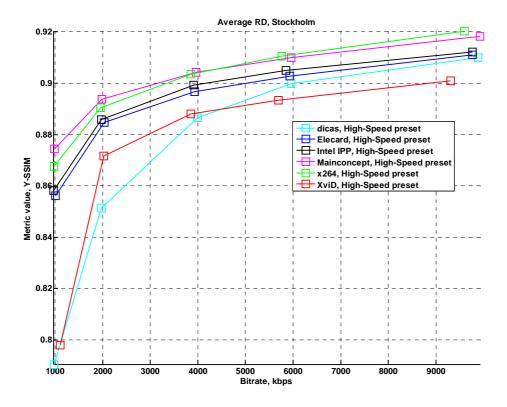


Figure 127. Bitrate/Quality. Usage area "HDTV", "Stockholm" sequence, "High Speed" preset, Y-SSIM

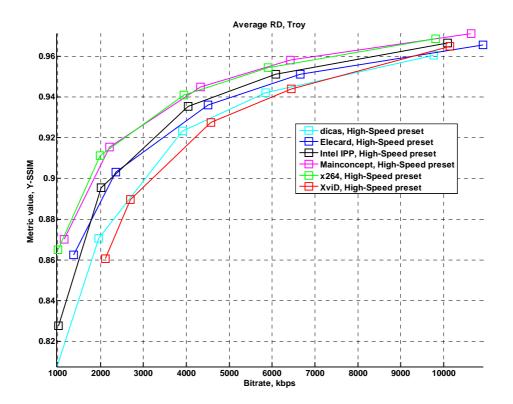


Figure 128. Bitrate/Quality. Usage area "HDTV", "Troy" sequence, "High Speed" preset, Y-SSIM

4.3.2 Encoding Speed

4.3.2.1 High Quality Preset

Figure 129 through Figure 136 are visualizations of codec encoding speed. The slowest codec is x264; the fastest is XviD for High Quality preset, and for High Speed preset the slowest codec is MainConcept and fastest Elecard. It is interesting to note the strange encoding speed for the fastest encoders on the lowest bitrates like XviD for High Quality preset and Elecard for High Speed preset at "Pedestrian Area" and "Troy" sequences.

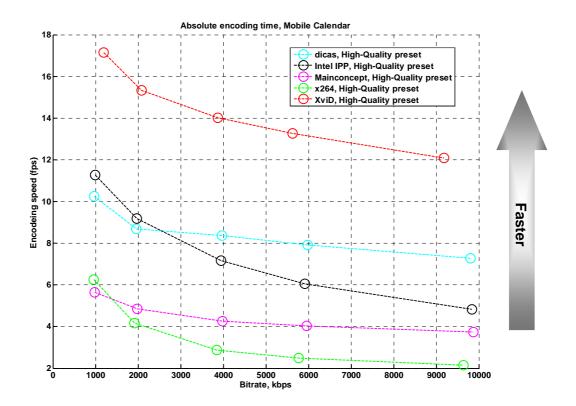


Figure 129. Encoding speed. Usage area "HDTV", "Mobile Calendar " sequence, "High Quality" preset

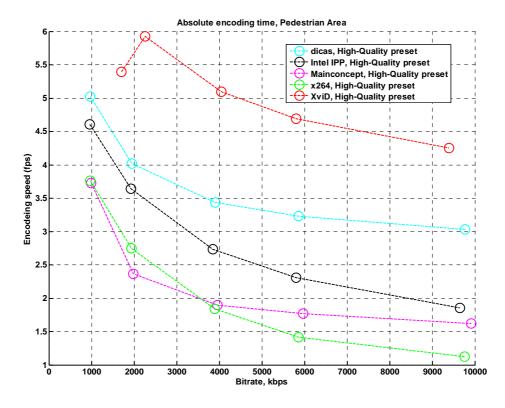


Figure 130. Encoding speed. Usage area "HDTV", "Pedestrian Area " sequence, "High Quality" preset


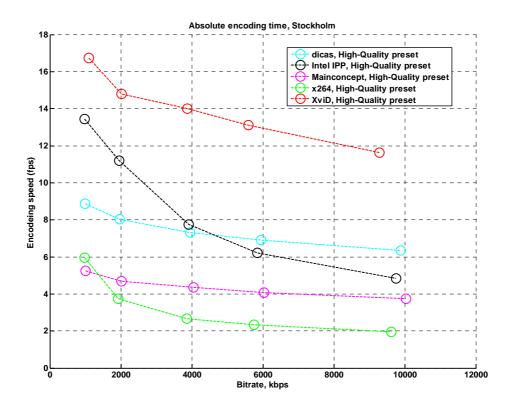


Figure 131. Encoding speed. Usage area "HDTV", "Stockholm" sequence, "High Quality" preset



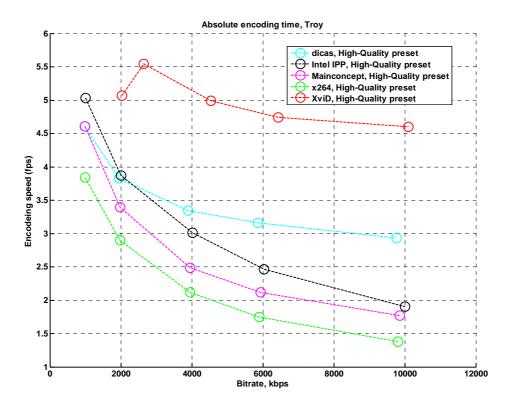

4.3.2.2 High Speed Preset

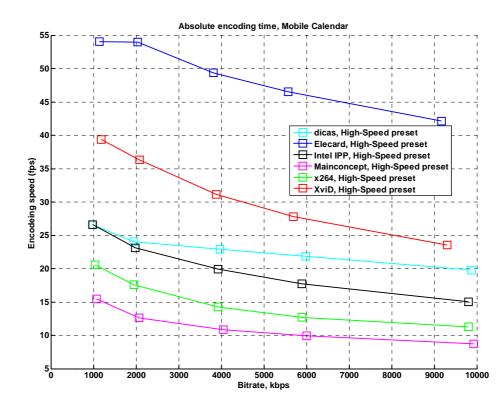


Figure 133. Encoding speed. Usage area "HDTV", "Mobile Calendar " sequence, "High Speed" preset

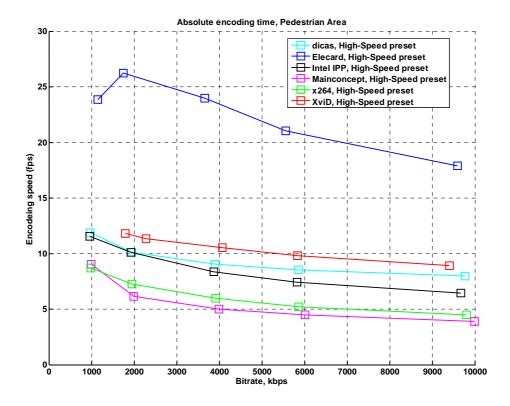


Figure 134. Encoding speed. Usage area "HDTV", "Pedestrian Area " sequence, "High Speed" preset


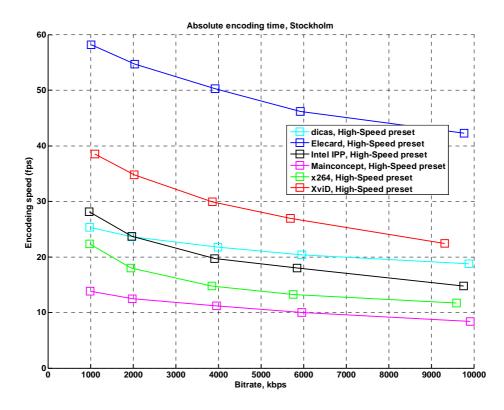


Figure 135. Encoding speed. Usage area "HDTV", "Stockholm" sequence, "High Speed" preset



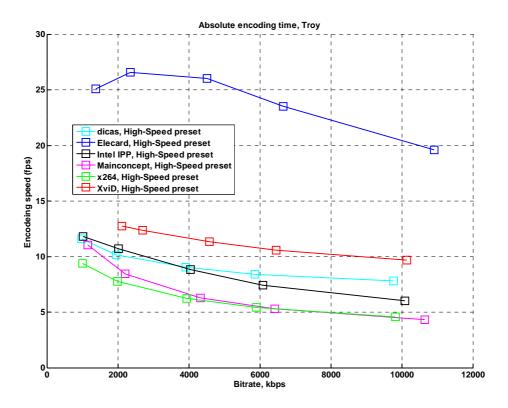

4.3.3 Speed\Quality Tradeoff

4.3.3.1 High Quality Preset

Detailed descriptions of speed/quality trade-off graphs can be found in Appendix 6. Figures Explanation. Sometimes codec results are not present in the particular graph. The reason for that are extremely poor results of the codec. Its RD curve has no intersection with reference's RD curve.

Please note that the averaging method among all sequences suppose that all codecs have the results for each sequence. When it's not the case, then only existing results are taking into account.

The High Quality preset results are presented in Figure 137 through Figure 146. At Y-PNSR the MainConcept encoder is better than x264 at all the sequences and at the average, XviD is better than dicas (using HVSAQM) at all sequences except "Pedestrian Area" sequence, also XviD is better than dicas at average. Intel IPP H.264 encoder is better than x264 at "Pedestrian Area" and "Stockholm" sequences. At Y-SSIM the situation is very close except that Intel IPP H.264 is not better than x264 at "Stockholm" sequence, and at "Troy" sequence all the encoders are sub-optimal, at average MainConcept is better than XviD.

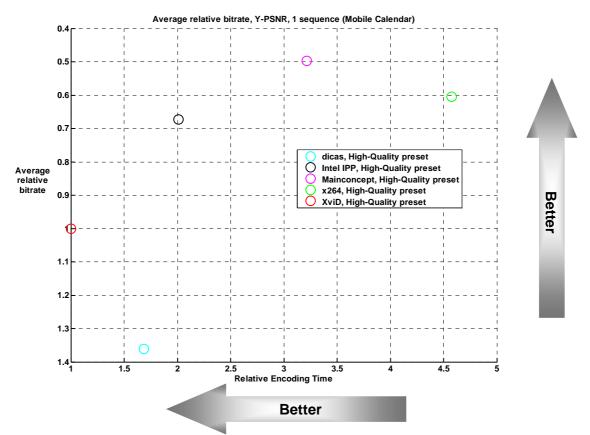


Figure 137. Speed/Quality tradeoff. Usage area "HDTV", "Mobile Calendar" sequence, "High Quality" preset, Y-PSNR

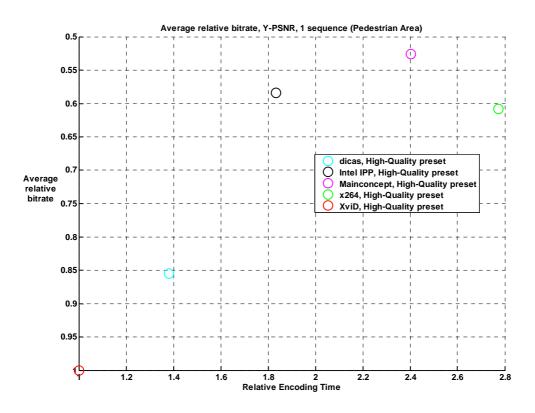


Figure 138. Speed/Quality tradeoff. Usage area "HDTV", "Pedestrian Area" sequence, "High Quality" preset, Y-PSNR

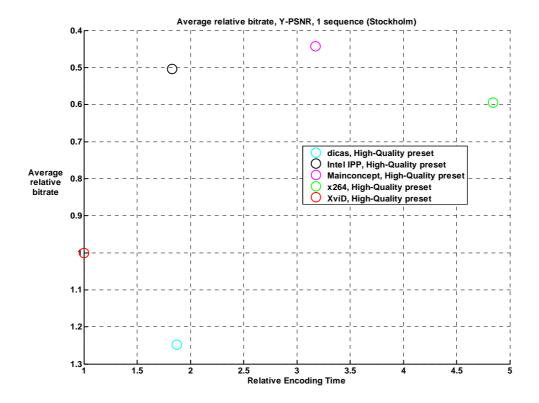


Figure 139. Speed/Quality tradeoff. Usage area "HDTV", "Stockholm" sequence, "High Quality" preset, Y-PSNR

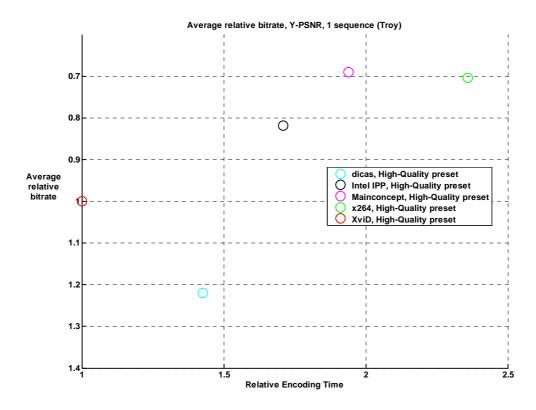


Figure 140. Speed/Quality tradeoff. Usage area "HDTV", "Troy" sequence, "High Quality" preset, Y-PSNR

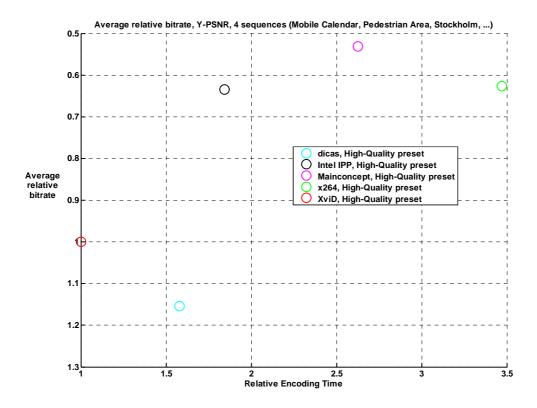


Figure 141. Speed/Quality tradeoff. Usage area "HDTV", all sequences, "High Quality" preset, Y-PSNR

SSIM

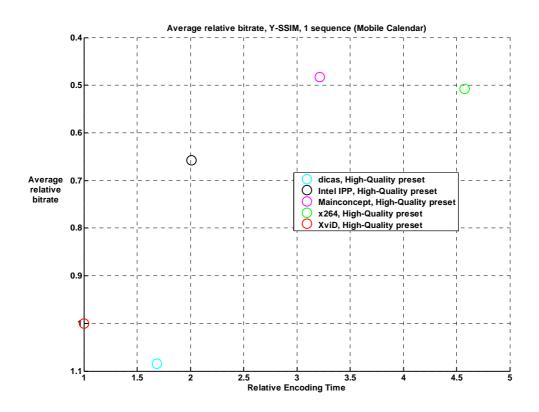


Figure 142. Speed/Quality tradeoff. Usage area "HDTV", "Mobile Calendar" sequence, "High Quality" preset, Y-SSIM

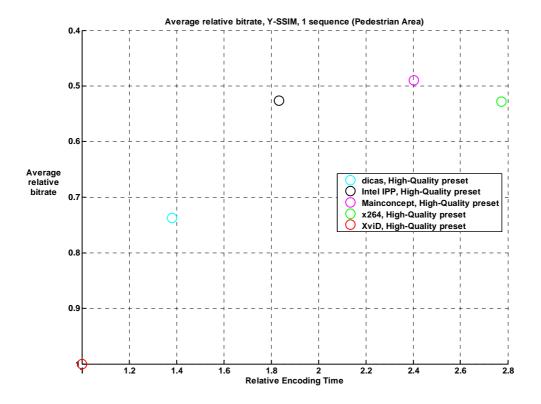


Figure 143. Speed/Quality tradeoff. Usage area "HDTV", "Pedestrian Area" sequence, "High Quality" preset, Y-SSIM

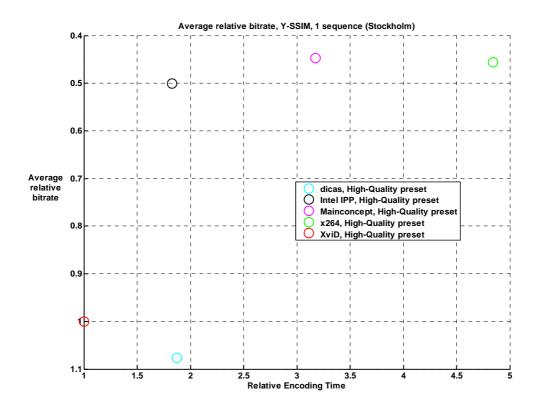


Figure 144. Speed/Quality tradeoff. Usage area "HDTV", "Stockholm" sequence, "High Quality" preset, Y-SSIM

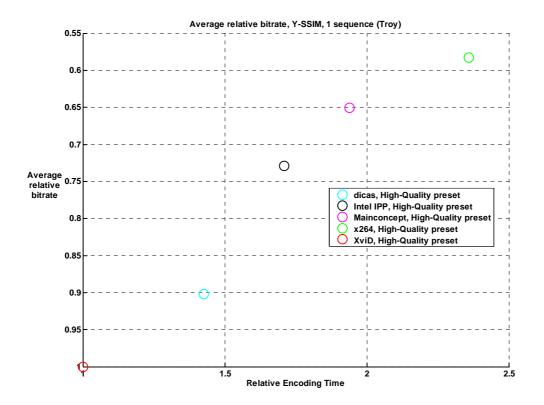


Figure 145. Speed/Quality tradeoff. Usage area "HDTV", "Troy" sequence, "High Quality" preset, Y-SSIM

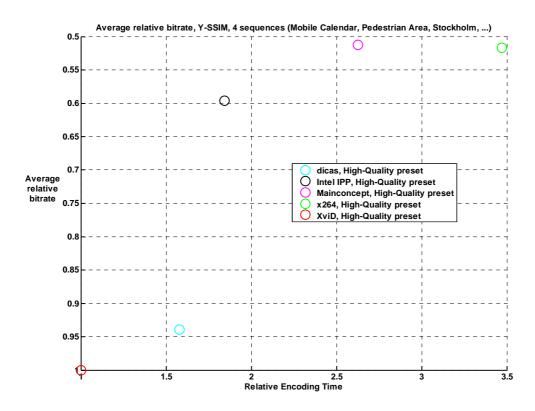


Figure 146. Speed/Quality tradeoff. Usage area "HDTV", all sequences, "High Quality" preset, Y-SSIM

4.3.3.2 High Speed Preset

Figure 147 through Figure 156 are visualizations of the speed/quality trade-off for the High Speed preset. For Y-PSNR metric:

- at "Mobile Calendar" sequence Elecard and XviD is better than dicas;
- at "Pedestrian Area" sequence Intel IPP H.264 is better than x264;
- at "Stockholm" sequence Intel IPP H.264 is better than x264, and Elecard and XviD is better than dicas;
- at "Troy" sequence MainConcept is better than x264, and Elecard and XviD is better than dicas;
- at all the sequences Elecard is better than XviD;
- at average Elecard and XviD is better than dicas, and Elecard is better than XviD.

For Y-SSIM metric:

- at "Mobile Calendar" Elecard and XviD is better than dicas;
- at "Stockholm" sequence Elecard and XviD are better than dicas;
- at "Troy" sequence Elecard and XviD are better than dicas;
- at all the sequences Elecard is better than XviD;
- at average Elecard is better than XviD and dicas.

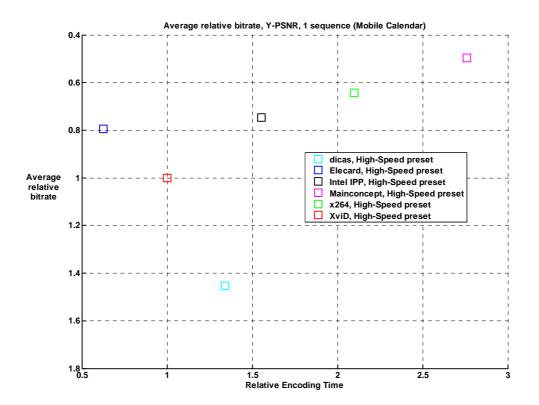


Figure 147. Speed/Quality tradeoff. Usage area "HDTV", "Mobile Calendar" sequence, "High Speed" preset, Y-PSNR

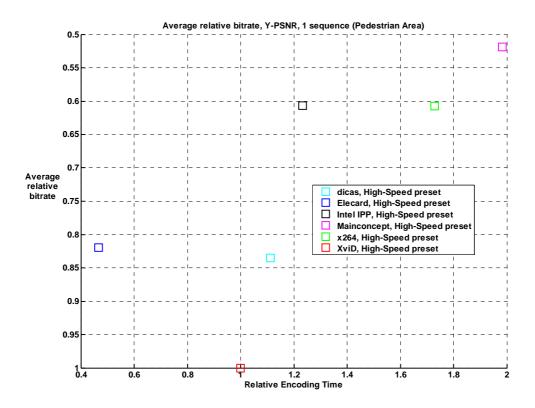


Figure 148. Speed/Quality tradeoff. Usage area "HDTV", "Pedestrian Area" sequence, "High Speed" preset, Y-PSNR

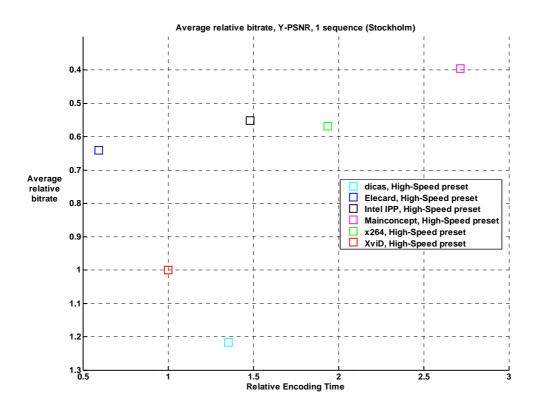


Figure 149. Speed/Quality tradeoff. Usage area "HDTV", "Stockholm" sequence, "High Speed" preset, Y-PSNR

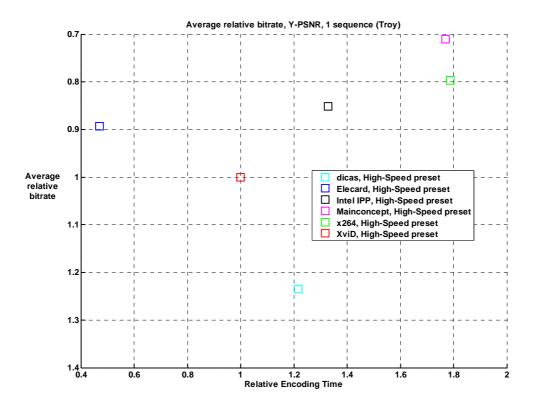


Figure 150. Speed/Quality tradeoff. Usage area "HDTV", "Troy" sequence, "High Speed" preset, Y-PSNR

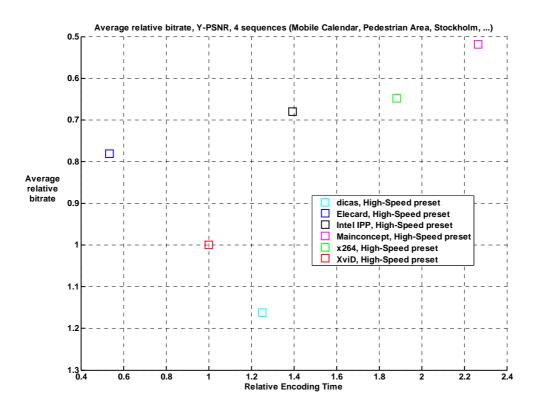


Figure 151. Speed/Quality tradeoff. Usage area "HDTV", all sequences, "High Speed" preset, Y-PSNR

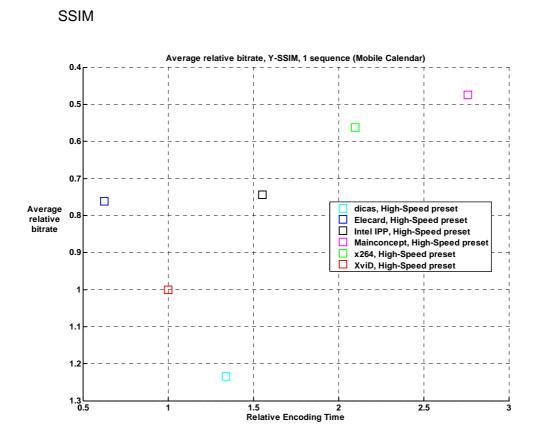


Figure 152. Speed/Quality tradeoff. Usage area "HDTV", "Mobile Calendar" sequence, "High Speed" preset, Y-SSIM

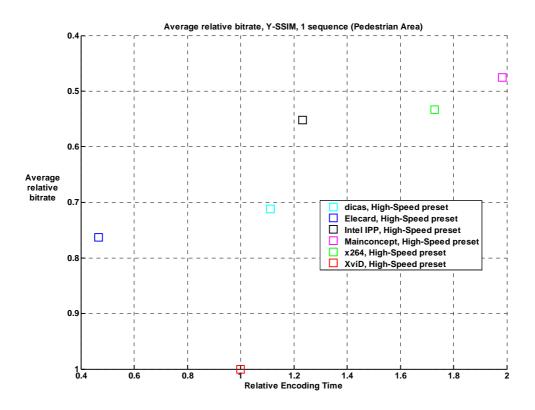


Figure 153. Speed/Quality tradeoff. Usage area "HDTV", "Pedestrian Area" sequence, "High Speed" preset, Y-SSIM

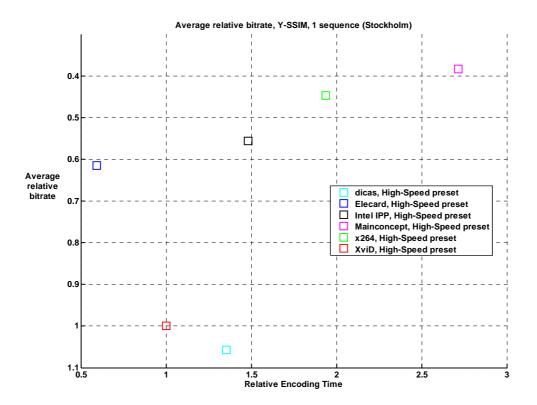


Figure 154. Speed/Quality tradeoff. Usage area "HDTV", "Stockholm" sequence, "High Speed" preset, Y-SSIM

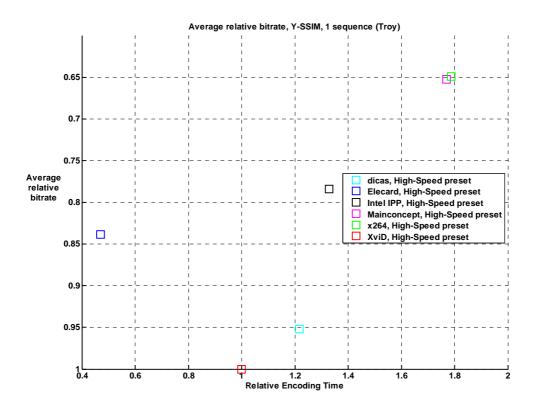


Figure 155. Speed/Quality tradeoff. Usage area "HDTV", "Troy" sequence, "High Speed" preset, Y-SSIM

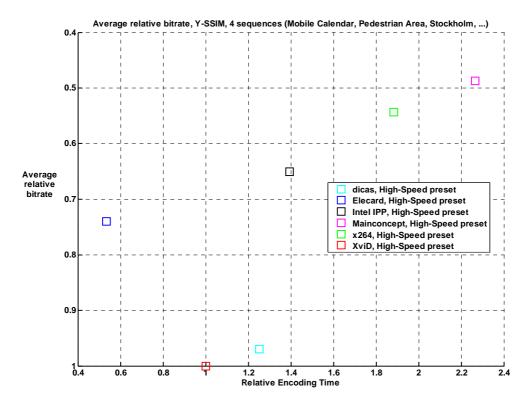


Figure 156. Speed/Quality tradeoff. Usage area "HDTV", all sequences, "High Speed" preset, Y-SSIM

4.3.4 Bitrate Handling

Bitrate handling results are presented in Figure 157 through Figure 164. At High Quality preset all the encoders except XviD have good bitrate handling mechanisms. The XviD codec has problems at low bitrates, for which it increases the bitrate up to two times and it decreases high bitrates. At High Speed preset some encoders have troubles, like XviD, Elecard and MainConcept at "Mobile Calendar" sequence at low bitrates. At other sequences Elecard increases low bitrates slightly comparing to x264, MainConcept, dicas and Intel IPP H.264 encoders.

4.3.4.1 High Quality Preset

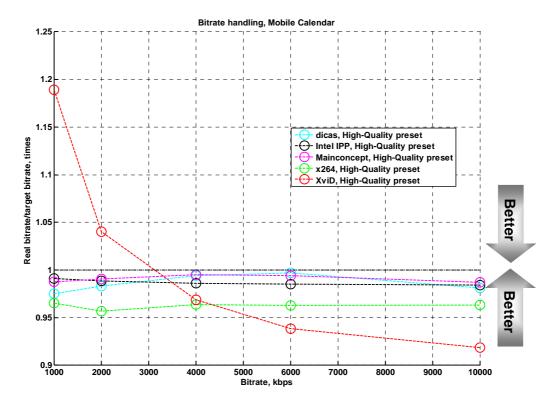


Figure 157. Bitrate Handling. Usage area "HDTV", "Mobile Calendar" sequence, "High Quality" preset

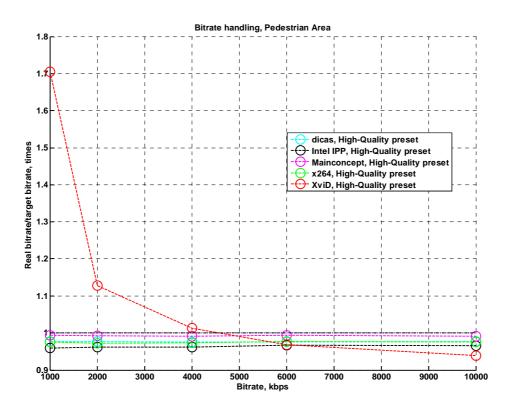


Figure 158. Bitrate Handling. Usage area "HDTV", "Pedestrian Area" sequence, "High Quality" preset

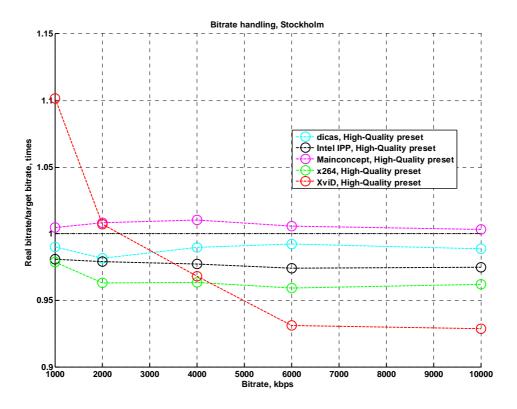


Figure 159. Bitrate Handling. Usage area "HDTV", "Stockholm" sequence, "High Quality" preset

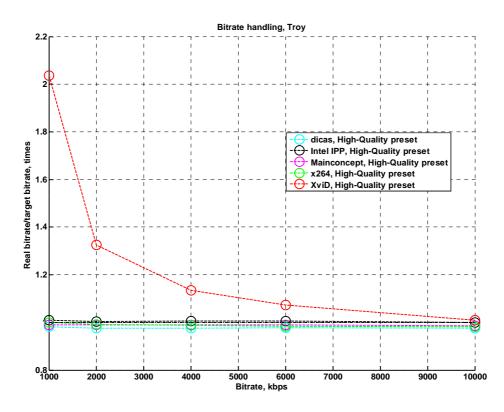


Figure 160. Bitrate Handling. Usage area "HDTV", "Troy" sequence, "High Quality" preset



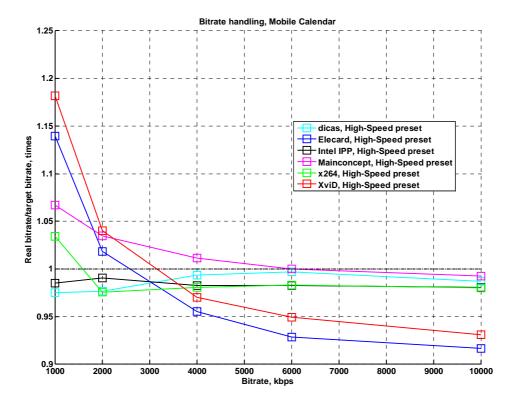


Figure 161. Bitrate Handling. Usage area "HDTV", "Mobile Calendar" sequence, "High Speed" preset

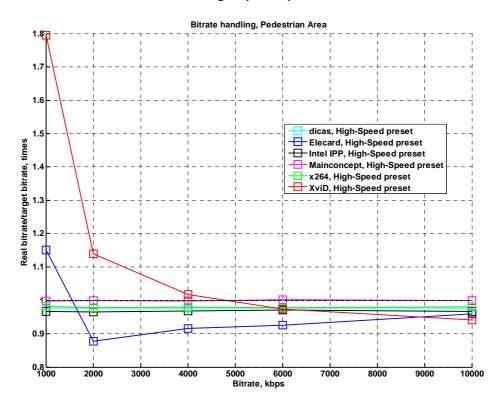


Figure 162. Bitrate Handling. Usage area "HDTV", "Pedestrian Area" sequence, "High Speed" preset

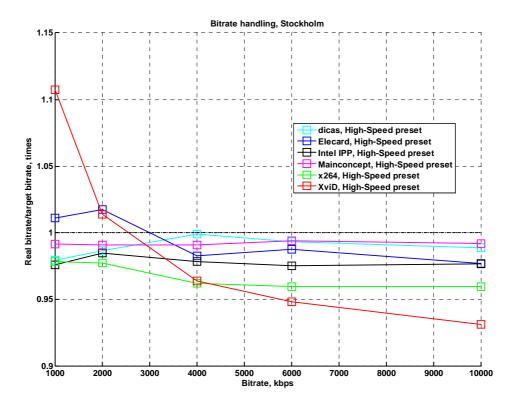


Figure 163. Bitrate Handling. Usage area "HDTV", "Stockholm" sequence, "High Speed" preset

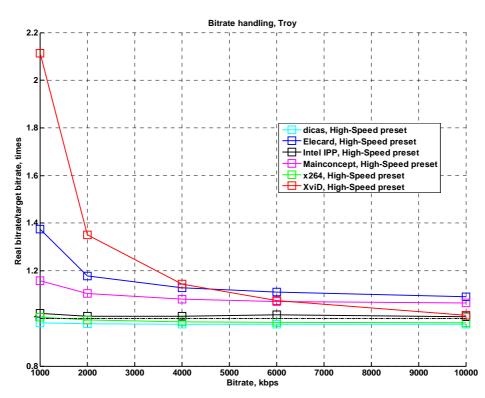


Figure 164. Bitrate Handling. Usage area "HDTV", "Troy" sequence, "High Speed" preset

4.3.5 Relative Quality Analysis

Table 11 through Table 14 contain relative bitrate data for a fixed quality output for all the encoders.

Note, that each number in tables below corresponds to some segment of bitrates (see Appendix 6. Figures Explanation for more details). Unfortunately, those segments can be rather different because of different quality of compared encoders. This fact can lead to some inadequate results in case of three and more codecs comparisons. This comparison technique will be improved in the future.

The MainConcept codec is the leader for all presets according to all objective quality metrics, and it is followed by the x264 codec. The Intel IPP H.264 encoder holds third place, except "High Quality" preset, Y-PSNR where it reaches second place and "High Speed" preset, Y-PSNR where Intel IPP H.264 and x264 results are very close to each other. For High Speed preset the results of Elecard encoder are for fourth place. All H.264 encoders show better bitrate ratio comparing to XviD encoder using Y-SSIM as quality metric rather than Y-PSNR. This difference could be easily noted for dicas encoder with HVSAQM enabled – if using Y-PNSR it shows lower results than XviD, but using Y-SSIM it shows better results than XviD.

Table 11.Average bitrate ratio for the same quality. Usage area "HDTV"."High Speed" preset, Y-PSNR.

	Dicas	Elecard	IPP H.264	MainConcept	x264	XviD
Dicas	100.00%	67.44%	58.84%	45.50%	55.97%	86.07%
Elecard	148.29%	100.00%	86.02%	65.90%	83.93%	128.01%
IPP H.264	169.96%	116.25%	100.00%	77.62%	98.33%	147.20%
MainConcept	219.76%	151.73%	128.83%	100.00%	128.61%	192.91%
x264	178.66%	119.14%	101.70%	77.75%	100.00%	154.24%
XviD	116.19%	78.12%	67.93%	51.84%	64.83%	100.00%

Table 12.Average bitrate ratio for the same quality. Usage area "HDTV"."High Speed" preset, Y-SSIM.

	Dicas	Elecard	IPP H.264	MainConcept	x264	XviD
Dicas	100.00%	77.98%	67.92%	51.94%	55.74%	103.13%
Elecard	128.24%	100.00%	86.77%	64.90%	70.49%	135.09%
IPP H.264	147.23%	115.24%	100.00%	75.46%	80.95%	153.74%
MainConcept	192.51%	154.07%	132.51%	100.00%	104.68%	205.12%
x264	179.40%	141.86%	123.54%	95.53%	100.00%	184.13%
XviD	96.97%	74.02%	65.04%	48.75%	54.31%	100.00%


Table 13.Average bitrate ratio for the same quality. Usage area "HDTV"."High Quality" preset, Y-PSNR.

	Dicas	IPP H.264	MainConcept	x264	XviD
Dicas	100.00%	53.57%	45.03%	53.20%	86.67%
IPP H.264	186.66%	100.00%	88.52%	104.99%	157.62%
MainConcept	222.06%	112.97%	100.00%	122.21%	188.13%
x264	187.96%	95.25%	81.83%	100.00%	159.64%
XviD	115.39%	63.44%	53.15%	62.64%	100.00%

	LU(yn Quanty	preset, 1-33m	<i>n</i> .	
	Dicas	IPP H.264	MainConcept	x264	XviD
Dicas	100.00%	61.35%	53.03%	52.74%	106.49%
IPP H.264	163.00%	100.00%	88.51%	86.09%	167.71%
MainConcept	188.57%	112.98%	100.00%	96.94%	195.28%
x264	189.60%	116.16%	103.16%	100.00%	193.50%
XviD	93.91%	59.63%	51.21%	51.68%	100.00%


Table 14.Average bitrate ratio for the same quality. Usage area "HDTV".
"High Quality" preset, Y-SSIM.

Figure 165 through Figure 168 visualize data in the tables above. Each line in those figures corresponds to one codec. Values in vertical axis are average relative bitrate comparing to the codecs in horizontal axis. The lower bitrate is the better relative results have the codec.

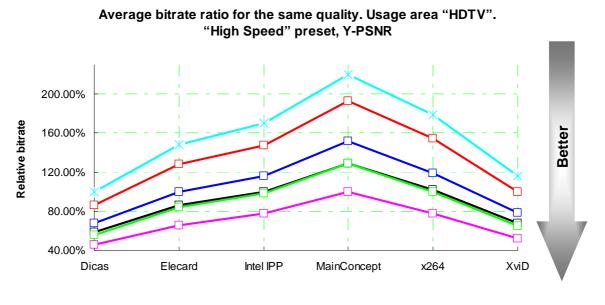

-X-Dicas -D-Elecard -D-Intel IPP -D-MainConcept -D-x264 -D-XviD

Figure 165. Average bitrate ratio for the same quality. Usage area "HDTV". "High Speed" preset, Y-PSNR.

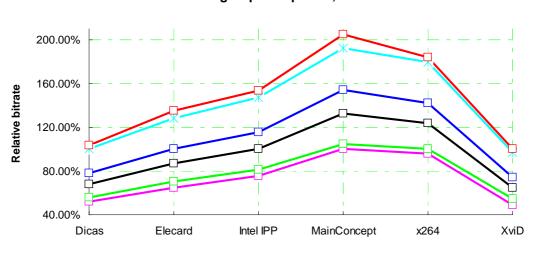


Average bitrate ratio for the same quality. Usage area "HDTV". "High Speed" preset, Y-SSIM

-X-Dicas -D-Elecard -D Intel IPP -D MainConcept -D x264 -D XviD


Average bitrate ratio for the same quality. Usage area "HDTV".

Figure 166. Average bitrate ratio for the same quality. Usage area "HDTV". "High Speed" preset, Y-SSIM.

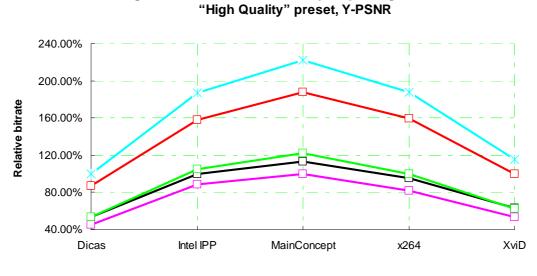

-X-Dicas -D-Intel IPP -D-MainConcept -D-x264 -D-XviD

Figure 167. Average bitrate ratio for the same quality. Usage area "HDTV". "High Quality" preset, Y-PSNR.

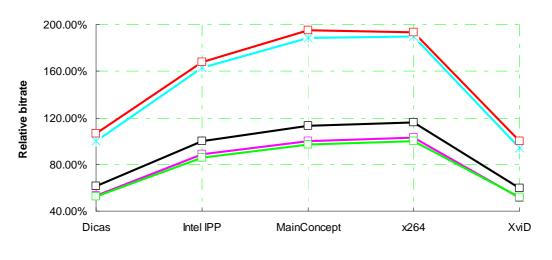

Average bitrate ratio for the same quality. Usage area "HDTV". "High Quality" preset, Y-SSIM

Figure 168. Average bitrate ratio for the same quality. Usage area "HDTV". "High Quality" preset, Y-SSIM.

4.4 Conclusions

4.4.1 Video conferences

All the analysis is being made with help of Y-SSIM as main quality metric. Leaders in the videoconference area are the x264 and MainConcept codecs, with MainConcept being the slightly better alternative. The worst quality is demonstrated by the XviD encoder as a presenter of MPEG-4 ASP encoder. The dicas codec is the only one which was provided with authentic video conference presets (disabled B-frames, low VBV-buffer) which have a negative impact on picture quality.

4.4.1.1 High Quality preset

MainConcept demonstrates the best quality for all sequences. The top three codecs for this preset are the following:

- 1. MainConcept
- 2. x264
- 3. Intel IPP H.264

The top three codecs also demonstrate acceptable bitrate handling.


4.4.1.2 High Speed preset

MainConcept demonstrates the best quality for all sequences. The top three codecs for this preset are the following:

- 1. MainConcept
- 2. x264
- 3,4. Elecard, Intel IPP H.264


⁻X-Dicas -D-Intel IPP -D-MainConcept -D-x264 -D-XviD

Elecard is being very slightly better than Intel IPP H.264. The first four codecs also demonstrate acceptable bitrate handling.

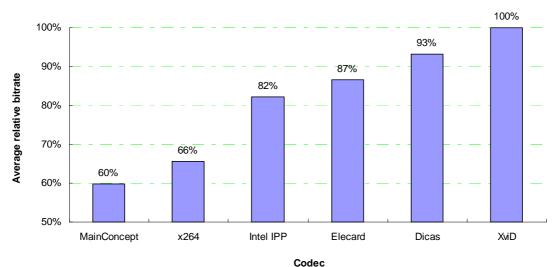

Average relative bitrate for the same quality for usage area "Video Conferences"

Figure 169. Average bitrate ratio for the same quality. Usage area "Video Conferences". All presets, Y-SSIM.

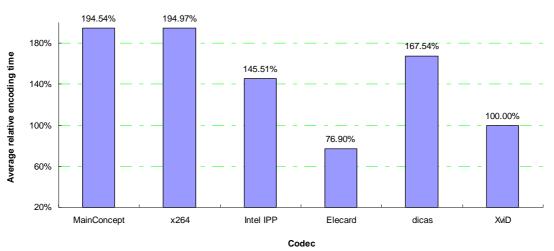

Average relative encoding time for usage area "Video Conferences"

Figure 170. Average relative encoding time. Usage area "Video Conferences". All presets.

4.4.2 Movies

The leading encoders in this category are MainConcept and x264. The quality of the XviD encoder is again rather low.

4.4.2.1 High Quality Preset


The x264 encoder demonstrates better quality at average, and MainConcept show slightly lower quality. The bitrate handling algorithm of these codecs is acceptable for this category. The Intel IPP H.264 codec once again holds third place and it has faster encoding speed than x264 and MainConcept. The top three codecs for this preset are the following:

- 1. x264
- 2. MainConcept
- 3. Intel IPP H.264

4.4.2.2 High Speed Preset


The results for this preset are similar to those of the High Quality preset. The leaders are the x264 and MainConcept codecs. In third place, once again, is the Intel IPP H.264 encoder, but it has faster encoding speed than x264 and MainConcept. The top three codecs for this preset are the following:

- 1. x264
- 2. MainConcept
- 3. Intel IPP H.264

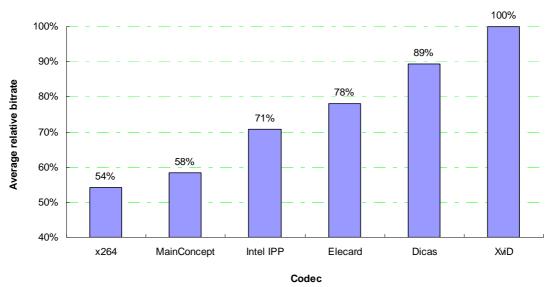

Average relative bitrate for the same quality for usage area "Movie"

Figure 171. Average bitrate ratio for the same quality. Usage area "Movie". All presets, Y-SSIM.

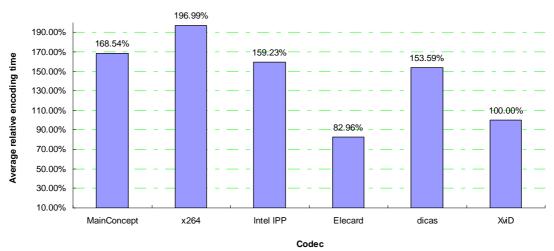

Average relative encoding time for usage area "Movie"

Figure 172. Average relative encoding time. Usage area "Movie". All presets.

4.4.3 HDTV

4.4.3.1 High Quality Preset


The MainConcept and x264 codecs demonstrate the highest quality among all the codecs tested in this comparison. The encoding quality of the MainConcept codec is better than quality the x264 encoder and the speed is faster. The third-place encoder, rated by quality, is the Intel IPP H.264 codec. And, it is faster than MainConcept and x264. The top three codecs for this preset are the following:

- 1. MainConcept
- 2. x264
- 3. Intel IPP H.264

4.4.3.2 High Speed Preset


The situation is almost the same as for High Quality preset. The top three codecs for this preset are the following:

- 1. MainConcept
- 2. x264
- 3. Intel IPP H.264

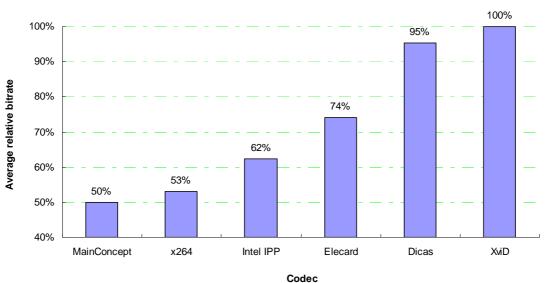

Average relative bitrate for the same quality for usage area "HDTV"

Figure 173. Average bitrate ratio for the same quality. Usage area "HDTV". All presets, Y-SSIM.

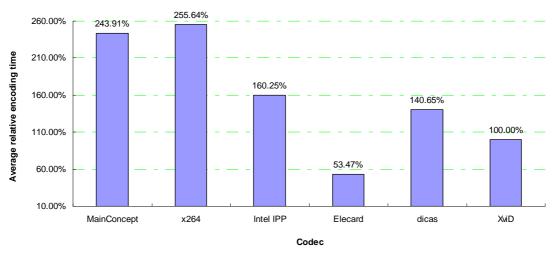


Average relative encoding time for usage area "HDTV"

Figure 174. Average relative encoding time. Usage area "HDTV". All presets.


4.4.4 Overall Conclusions

Overall, the leaders in this comparison are the MainConcept and x264 encoders, with the Intel IPP H.264 encoder taking a strong third place. The XviD (MPEG-4 ASP) codec is the last at average and it demonstrates difficulties with bitrate handling algorithms.

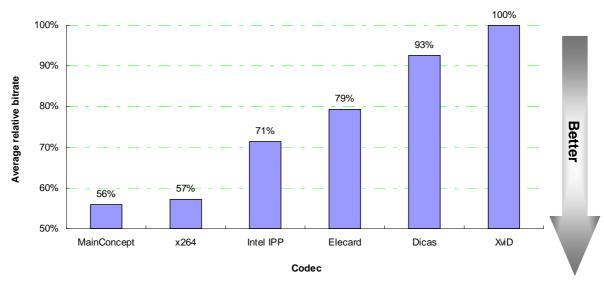

Average relative bitrate for the same quality

Figure 175. Average bitrate ratio for a fixed quality for all categories and all presets (Y-SSIM).

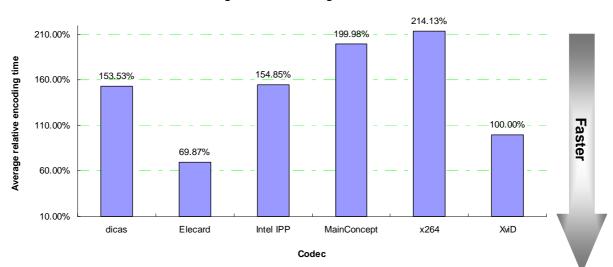

Average relative encoding time

Figure 176. Average relative encoding time for all categories and all presets.

The overall ranking of the codecs tested in this comparison is as follows:

- 1. MainConcept
- 2. x264
- 3. Intel IPP H.264
- 4. Elecard
- 5. Dicas
- 6. XviD

This rank based only on quality results of encoders (see Figure 175). Encoding speed is not considered here.

The difference between the MainConcept and x264 encoders is not overly significant, so these two encoders are both the clear leaders in this comparison. The developers of the Elecard encoder do not provide a High Quality preset, so its ranking is based solely on the results for the High Speed preset. And its encoding speed even faster than for XviD.

4.4.5 Comments from developers

dicas digital image coding GmbH:

"The dicas codec comes off badly mainly because of statistical reasons. It is the only codec which was provided with authentical video conference presets (disabled B-frames and low VBV-buffer) which have a negative impact on picture quality and a HVSAQM algorithm which countervails PSNR as standard of measurement."

Intel Corporation:

"Along with Intel Integrated Performance Primitives (Intel IPP) library, the threaded library of highly optimized functions for multimedia and data processing applications, several media-encoding samples are delivered, including tested H.264 encoder. Originally this encoder was only meant to illustrate how Intel IPP functions can be used for efficient video-encoding, and we are proud that it is capable to compete well with such industry leaders as MainConcept. To our opinion, this year's competition demonstrates that, along with some advanced quality control features like adaptive MB quantization we are currently lacking, major role in defining final quality difference and resulting places distribution plays different rate-control strategies. By design our encoder was aimed to be included into videoprocessing pipelines and for that reason our rate control is providing nearconstant bitrate locally for the whole encoded sequence making it difficult to efficiently redistribute bits between scenes with different complexity. That is why it comes to no surprise that two-pass rate control outperforms it at relatively low bitrates and at the same time that in most cases we managed to provide better bitrate handling than our competitors.

For the next competition we are suggesting to include more information about contenders, their availability for customers, licensing terms and pricing information, together with some overview of the encoders market in general. It would be better to include into benchmark codec products that are representatives of the current encoder market. It would be also very interesting to see how hardware-assisted encoder solutions will perform against software-only ones. Overall, this was an interesting and challenging competition, thank you MSU, and keep up a good work!"

5 Appendix 1. One Pass High Quality Encoding

In the main comparison part for High Quality encoding some encoders use 2-pass encoders and some encoders use 1-pass encoding, and because of it this special part was introduced to compare 1-pass High Quality encoding presets for Movie and HDTV usage areas.

5.1 Movie

5.1.1 RD curves

The High Quality preset results for each sequence are presented in Figure 177 through Figure 184. The first four pictures show the Y-PSNR results and the last four pictures show the Y-SSIM results. Used metric significantly influence on results: leader of PSNR metric is MainConcept, leader of SSIM is x264.

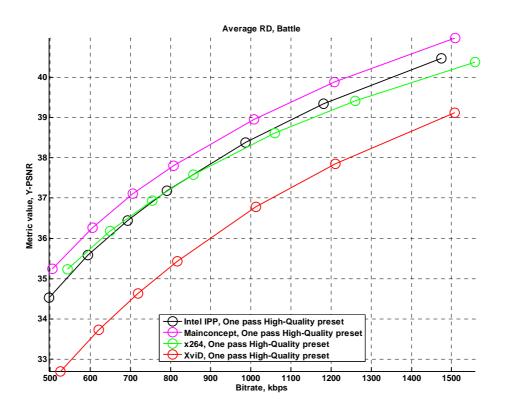


Figure 177. Bitrate/Quality. Usage area "Movies", "Battle" sequence, "One pass High Quality" preset, Y-PSNR

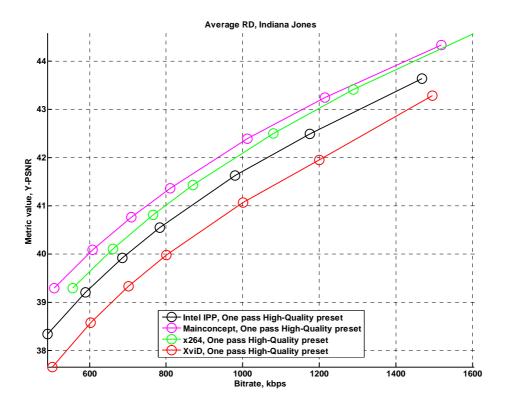


Figure 178. Bitrate/Quality. Usage area "Movies", "Indiana Jones" sequence, "One pass High Quality" preset, Y-PSNR

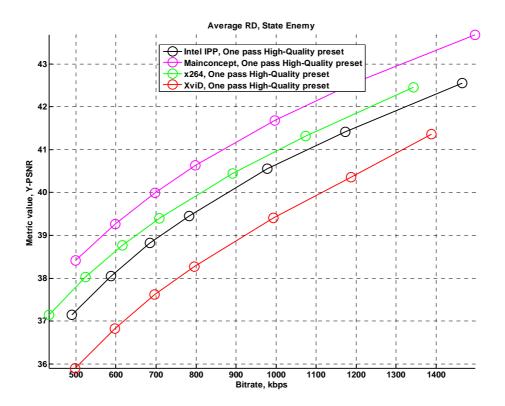


Figure 179. Bitrate/Quality. Usage area "Movies", "State Enemy" sequence, "One pass High Quality" preset, Y-PSNR

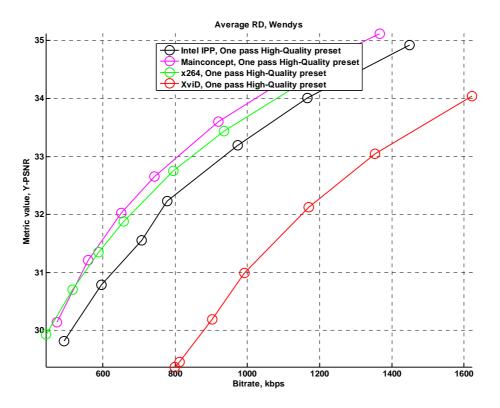


Figure 180. Bitrate/Quality. Usage area "Movies", "Wendys" sequence, "One pass High Quality" preset, Y-PSNR

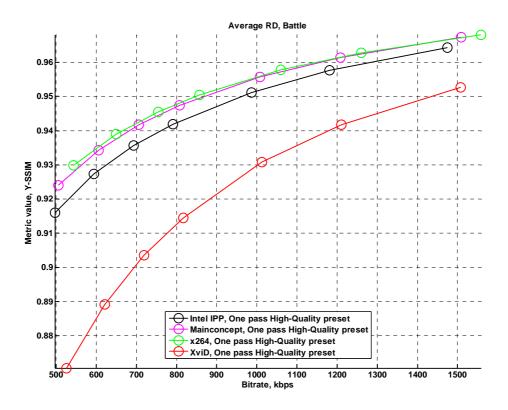


Figure 181. Bitrate/Quality. Usage area "Movies", "Battle" sequence, "One pass High Quality" preset, Y-SSIM

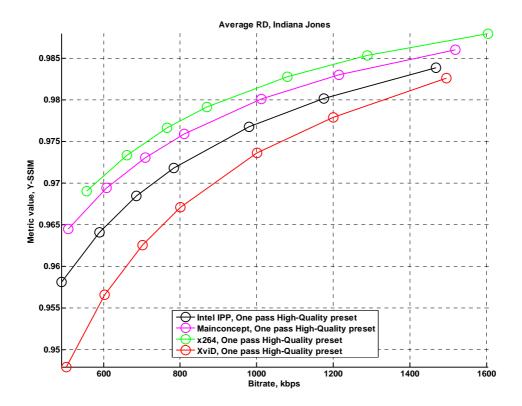


Figure 182. Bitrate/Quality. Usage area "Movies", "Indiana Jones" sequence, "One pass High Quality" preset, Y-SSIM

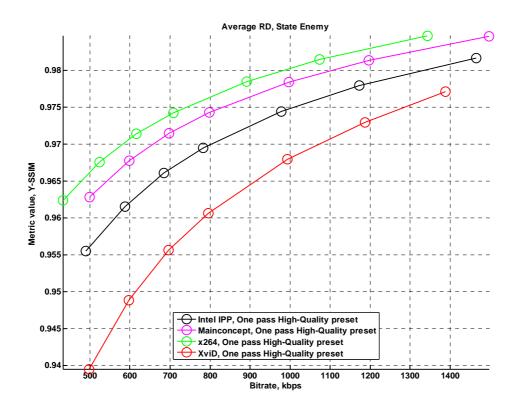


Figure 183. Bitrate/Quality. Usage area "Movies", "State Enemy" sequence, "One pass High Quality" preset, Y-SSIM

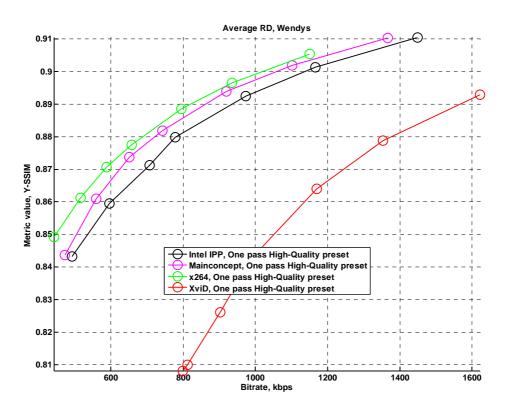


Figure 184. Bitrate/Quality. Usage area "Movies", "Wendys" sequence, "One pass High Quality" preset, Y-SSIM

5.1.2 Encoding speed

Figure 185 through Figure 188 show results for the High Quality one pass preset. The slowest codec is x264; the fastest is XviD except "Wendys" sequence. Encoding speed for the XviD encoder is not very stable and has not strong dependency on target bitrate.

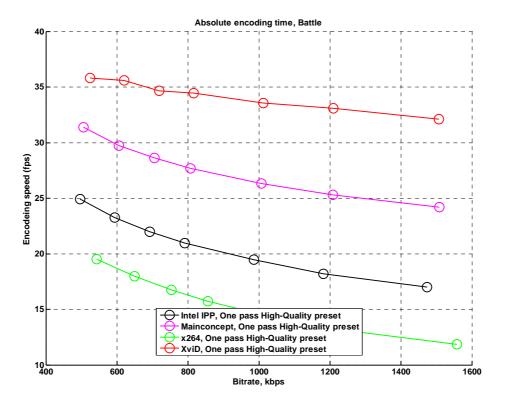


Figure 185. Encoding speed. Usage area "Movies", "Battle" sequence, "One pass High Quality" preset

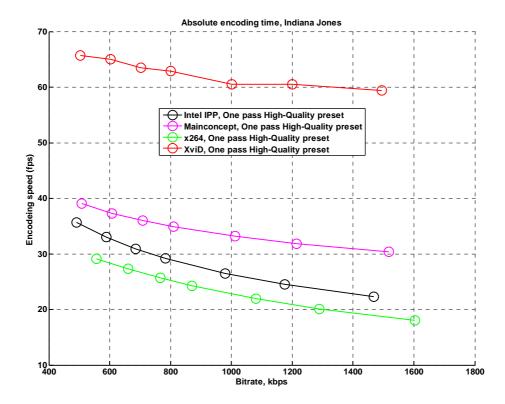


Figure 186. Encoding speed. Usage area "Movies", "Indiana Jones" sequence, "One pass High Quality" preset

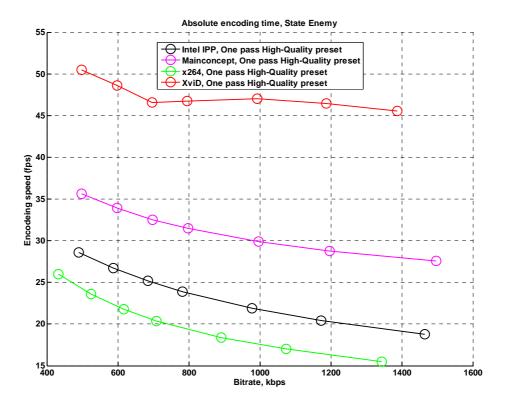


Figure 187. Encoding speed. Usage area "Movies", "State Enemy" sequence, "One pass High Quality" preset

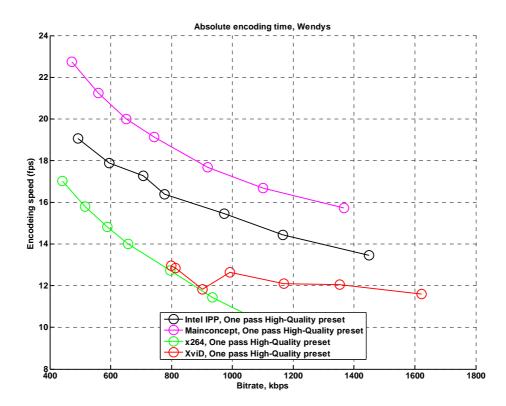


Figure 188. Encoding speed. Usage area "Movies", "Wendys" sequence, "One pass High Quality" preset

5.1.3 Speed/Quality Tradeoff

The speed/quality trade-off graphs simultaneously show relative quality and encoding speed for the encoders tested in this comparison. Again, XviD is the reference codec with both quality and speed normalized to unity for all of the below graphs. The terms "better" and "worse" are used to compare codecs in the same manner as in previous portions of this comparison.

Figure 189 through Figure 198 show results for the High Quality one pass preset. Results differ for PSNR and SSIM metrics. Intel IPP H.264 and x264 are worse and slower than MainConcept when PSNR metric is used. If to use SSIM metric Intel IPP H.264 is worse than MainConcept, but x264 and MainConcept are comparable, and at Wendys sequence all the encoders are better than XviD.

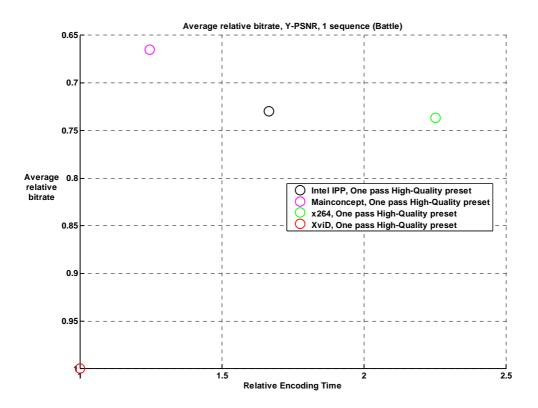


Figure 189. Speed/Quality tradeoff. Usage area "Movies", "Battle" sequence, "One pass High Quality" preset, Y-PSNR

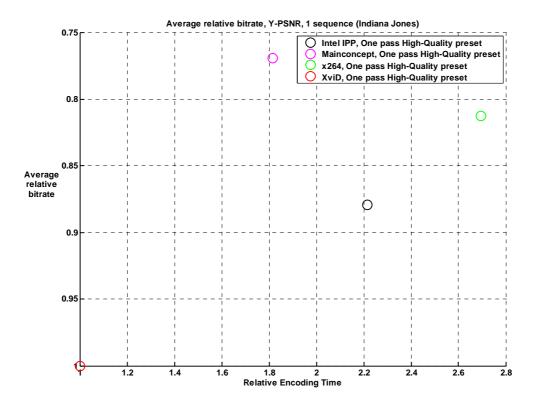


Figure 190. Speed/Quality tradeoff. Usage area "Movies", "Indiana Jones" sequence, "One pass High Quality" preset, Y-PSNR

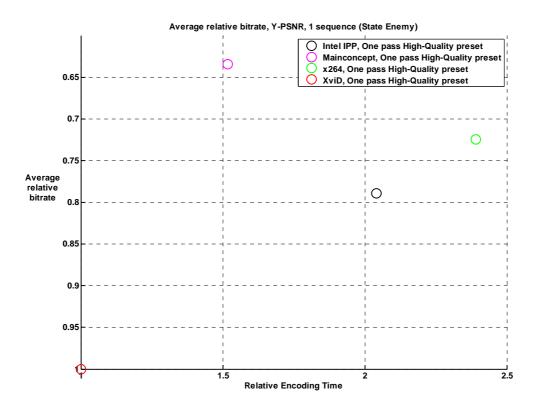


Figure 191. Speed/Quality tradeoff. Usage area "Movies", "State Enemy" sequence, "One pass High Quality" preset, Y-PSNR

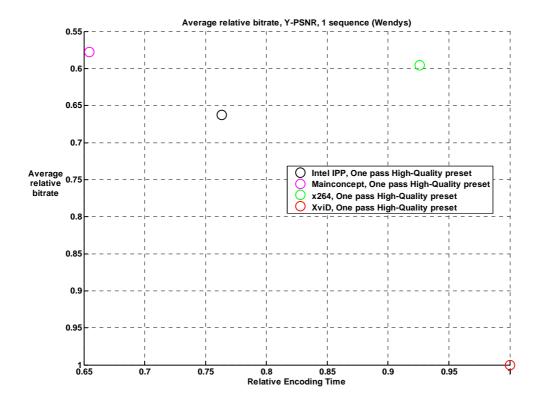


Figure 192. Speed/Quality tradeoff. Usage area "Movies", "Wendys" sequence, "One pass High Quality" preset, Y-PSNR

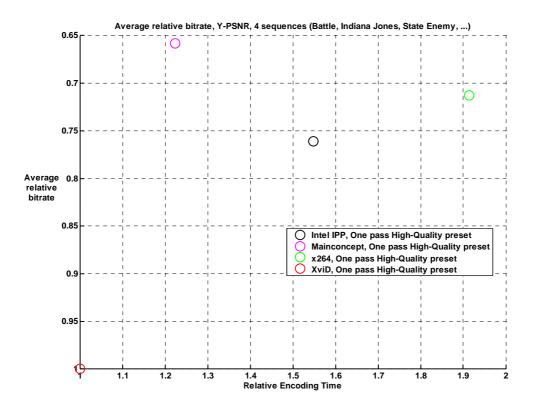


Figure 193. Speed/Quality tradeoff. Usage area "Movies", all sequences, "One pass High Quality" preset, Y-PSNR

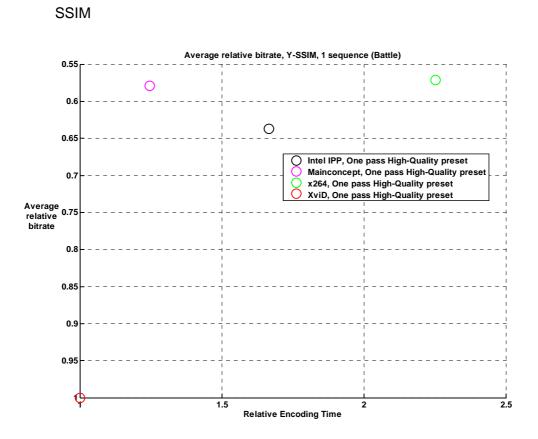


Figure 194. Speed/Quality tradeoff. Usage area "Movies", "Battle" sequence, "One pass High Quality" preset, Y-SSIM

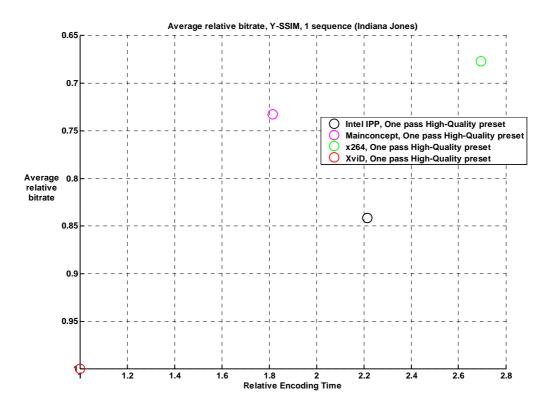


Figure 195. Speed/Quality tradeoff. Usage area "Movies", "Indiana Jones" sequence, "One pass High Quality" preset, Y-SSIM

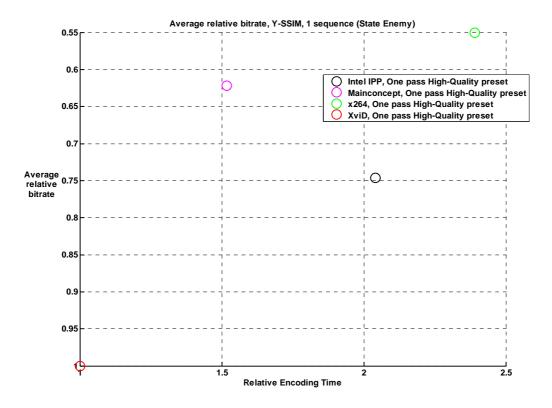


Figure 196. Speed/Quality tradeoff. Usage area "Movies", "State Enemy" sequence, "One pass High Quality" preset, Y-SSIM

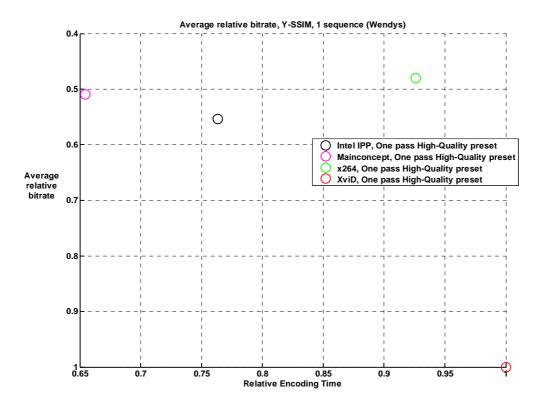


Figure 197. Speed/Quality tradeoff. Usage area "Movies", "Wendys" sequence, "One pass High Quality" preset, Y-SSIM

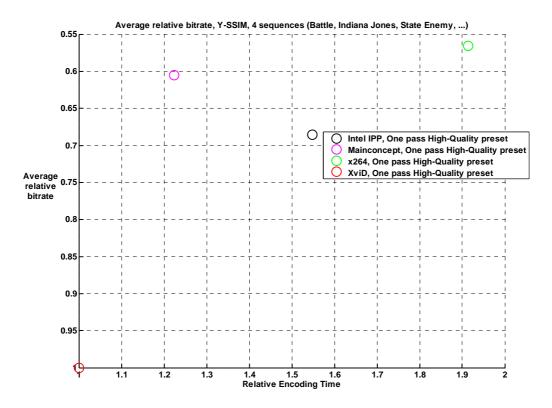


Figure 198. Speed/Quality tradeoff. Usage area "Movies", all sequences, "One pass High Quality" preset, Y-SSIM

5.1.4 Bitrate Handling

MainConcept and Intel IPP H.264 encoders demonstrates good bitrate handling, and x264 increases bitrates at "Battle" and "Indiana Jones" sequences, and decreases at "State Enemy" and "Wendys". XviD increases bitrate at "Wendys" sequences and have problems at "State Enemy" sequence at high bitrates. The difficulties of bitrate handling for "Wendys" sequence for XviD encoder could be explained by low numbers of frames in that sequence comparing to other sequences in Movie area sequences.

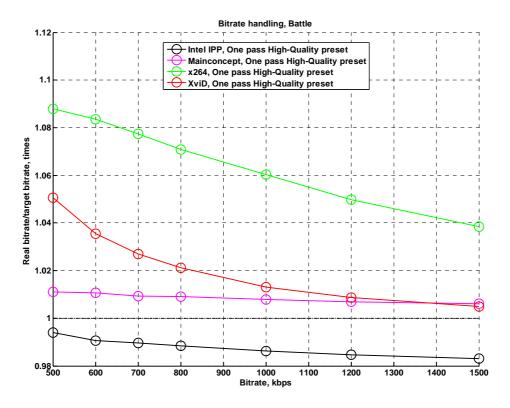


Figure 199. Bitrate Handling. Usage area "Movies", "Battle" sequence, "One pass High Quality" preset

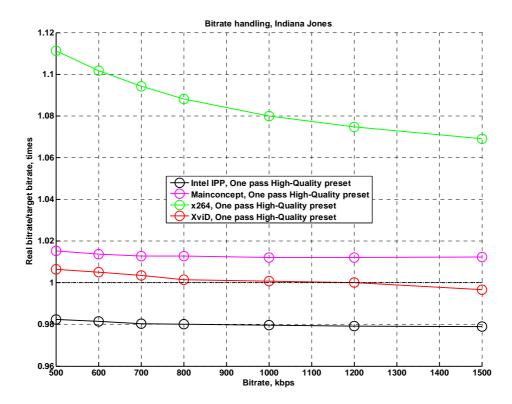


Figure 200. Bitrate Handling. Usage area "Movies", "Indiana Jones" sequence, "One pass High Quality" preset

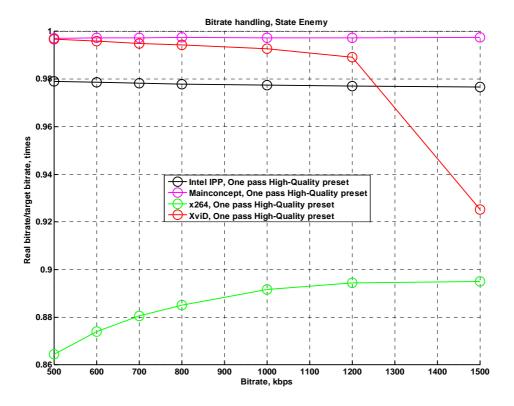


Figure 201. Bitrate Handling. Usage area "Movies", "State Enemy" sequence, "One pass High Quality" preset

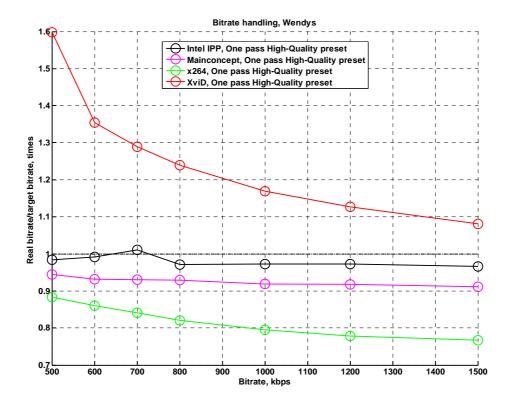


Figure 202. Bitrate Handling. Usage area "Movies", "Wendys" sequence, "One pass High Quality" preset

5.1.5 Relative Quality Analysis

Table 15 and Table 16 show relative bitrates for a fixed quality output for all codecs and presets. Note that these tables do not include information about the speed of the encoder.

As one can see the overall result strongly depends on what quality metric was used. At average, there are two leaders: x264 and MainConcept encoders, but if to use Y-PSNR the leader is MainConcept, but for Y-SSIM the leader is x264. The Intel IPP H.264 encoder has third place.


Table 15.Average bitrate ratio for the same quality. Usage area "Movie"."High Quality one pass" preset, Y-PSNR.

	IPP H.264	MainConcept	x264	XviD
IPP H.264	100%	86%	94%	131%
MainConcept	116%	100%	109%	152%
x264	106%	92%	100%	140%
XviD	76%	66%	71%	100%


Table 16.Average bitrate ratio for the same quality. Usage area "Movie"."High Quality one pass" preset, Y-SSIM.


	IPP H.264	MainConcept	x264	XviD
IPP H.264	100%	88%	82%	146%
MainConcept	114%	100%	93%	165%
x264	123%	107%	100%	177%
XviD	69%	61%	57%	100%

Figure 203 and Figure 204 visualize data in the tables above. Each line in those figures corresponds to one codec. Values in vertical axis are average relative bitrate comparing to the codecs in horizontal axis. The lower bitrate is the better relative results have the codec.

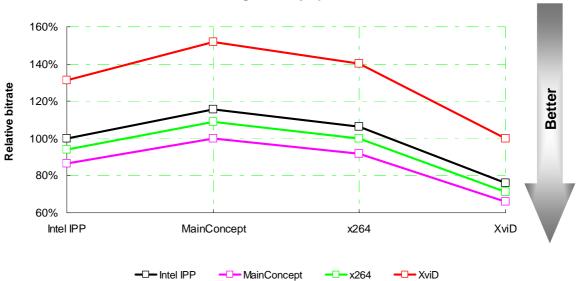

Average bitrate ratio for the same quality. Usage area "Movie". "One Pass High Quality" preset, Y-PSNR





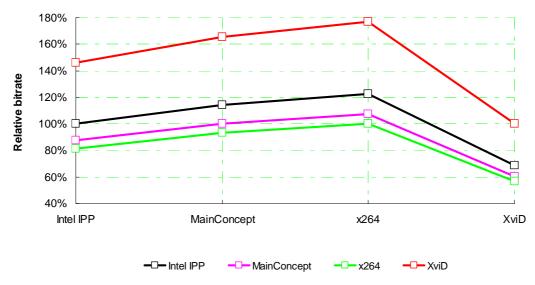


Figure 204. Average bitrate ratio for the same quality. Usage area "Movie". "One Pass High Quality" preset, Y-SSIM.

5.2 HDTV

5.2.1 RD curves

Figure 205 through Figure 212 depict the RD curves for the One pass High Quality preset in the case of HDTV. For Y-PSNR the best encoder is MainConcept and second place Intel IPP H.264 take, but for Y-SSIM x264 takes second places and Intel IPP H.264 is third.

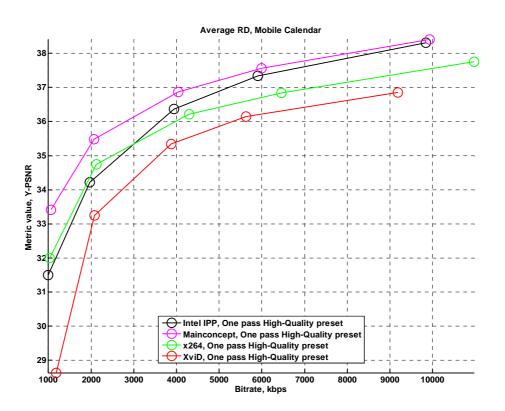


Figure 205. Bitrate/Quality. Usage area "HDTV", "Mobile Calendar" sequence, "One pass High Quality" preset, Y-PSNR

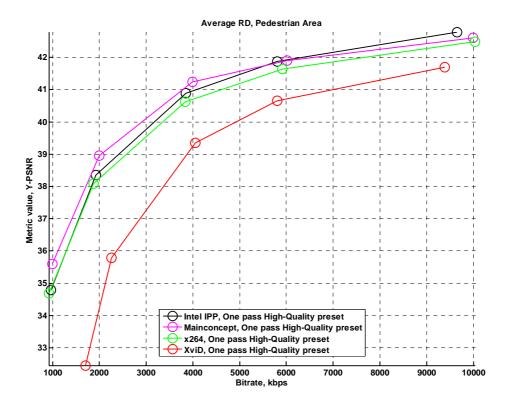


Figure 206. Bitrate/Quality. Usage area "HDTV", "Pedestrian Area" sequence, "One pass High Quality" preset, Y-PSNR

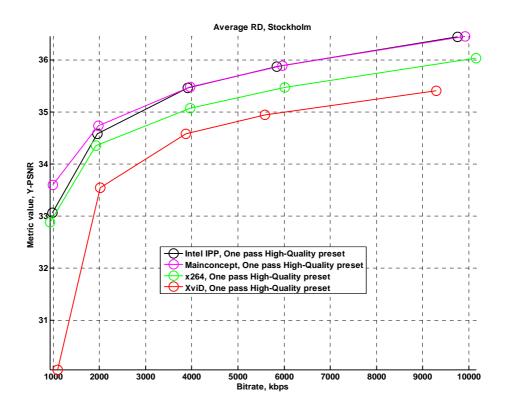


Figure 207. Bitrate/Quality. Usage area "HDTV", "Stockholm" sequence, "One pass High Quality" preset, Y-PSNR

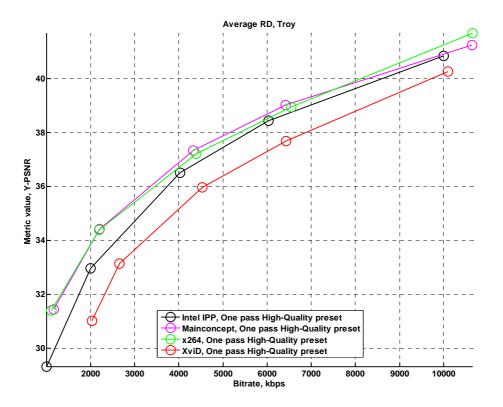


Figure 208. Bitrate/Quality. Usage area "HDTV", "Troy" sequence, "One pass High Quality" preset, Y-PSNR

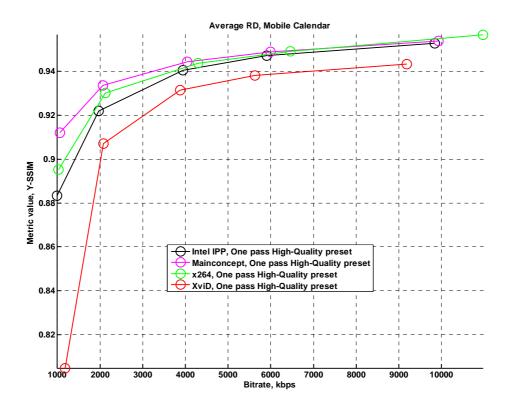


Figure 209. Bitrate/Quality. Usage area "HDTV", "Mobile Calendar" sequence, "One pass High Quality" preset, Y-SSIM

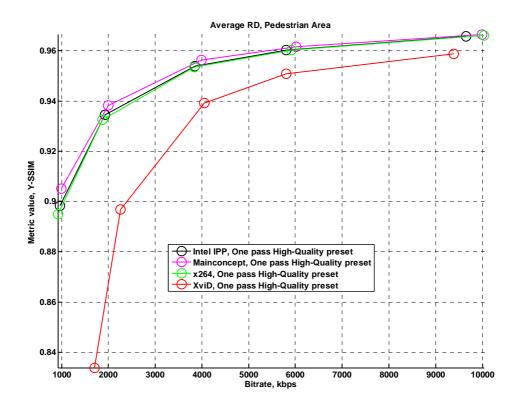


Figure 210. Bitrate/Quality. Usage area "HDTV", "Pedestrian Area" sequence, "One pass High Quality" preset, Y-SSIM

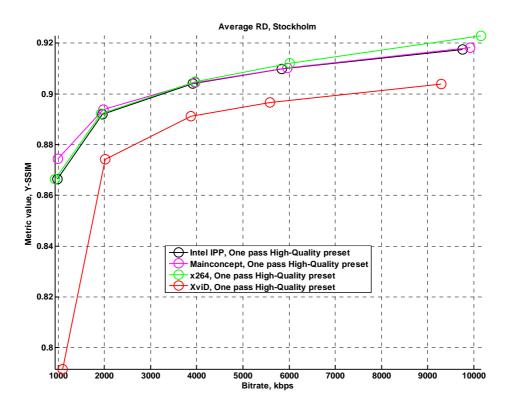


Figure 211. Bitrate/Quality. Usage area "HDTV", "Stockholm" sequence, "One pass High Quality" preset, Y-SSIM

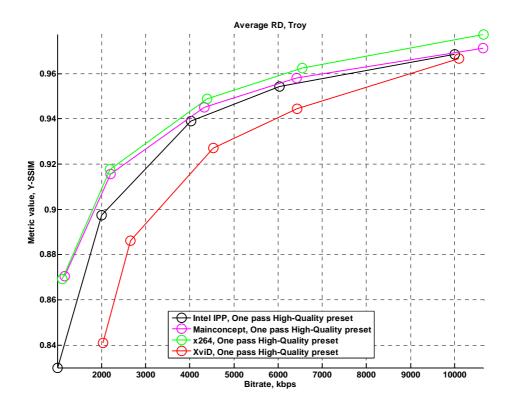


Figure 212. Bitrate/Quality. Usage area "HDTV", "Troy" sequence, "One pass High Quality" preset, Y-SSIM

5.2.2 Encoding speed

Figure 213 through Figure 216 are visualizations of codec encoding speed. The slowest codec is x264; the fastest is XviD. For low bitrates XviD has some imperfections at "Pedestrian Area" and "Troy" sequences.

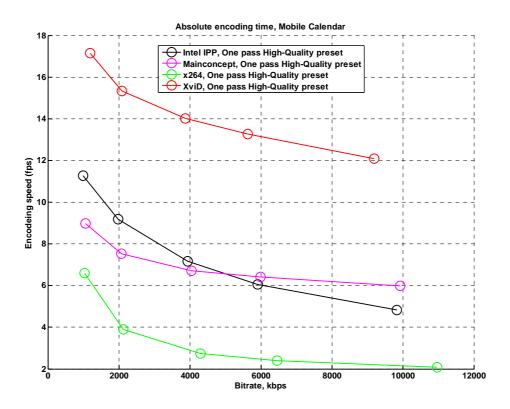


Figure 213. Encoding speed. Usage area "HDTV", "Mobile Calendar " sequence, "One pass High Quality" preset

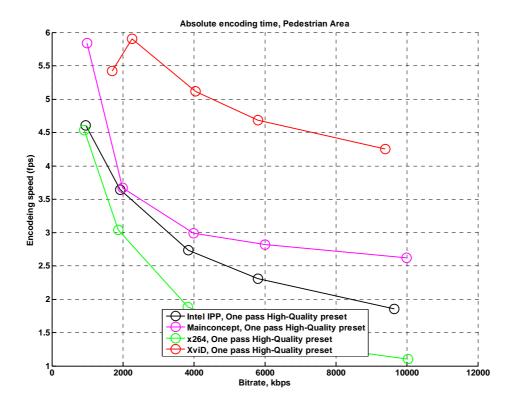


Figure 214. Encoding speed. Usage area "HDTV", "Pedestrian Area " sequence, "One pass High Quality" preset

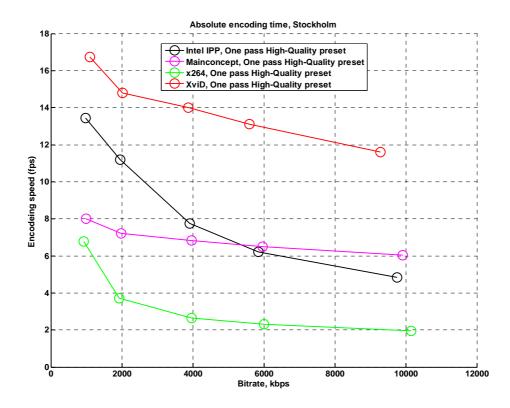


Figure 215. Encoding speed. Usage area "HDTV", "Stockholm" sequence, "One pass High Quality" preset

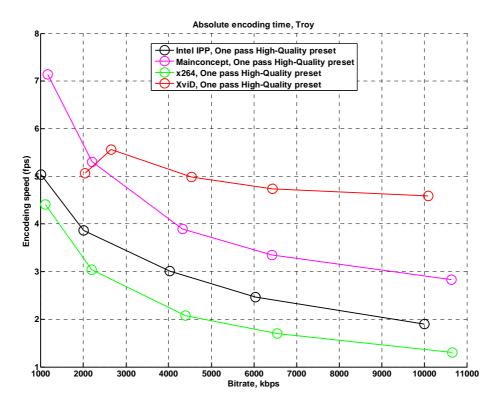


Figure 216. Encoding speed. Usage area "HDTV", "Troy" sequence, "One pass High Quality" preset

5.2.3 Speed/Quality Tradeoff

The High Quality one pass preset results are presented in Figure 217 through Figure 226. At Y-PNSR the MainConcept encoder is better than x264 at all the sequences and at the average, and MainConcept is better than Intel IPP H.264 at "Pedestrian Area", "Troy" sequences and at average. At Y-SSIM the situation is very close except that x264 and MainConcept are comparable at "Troy" sequence.

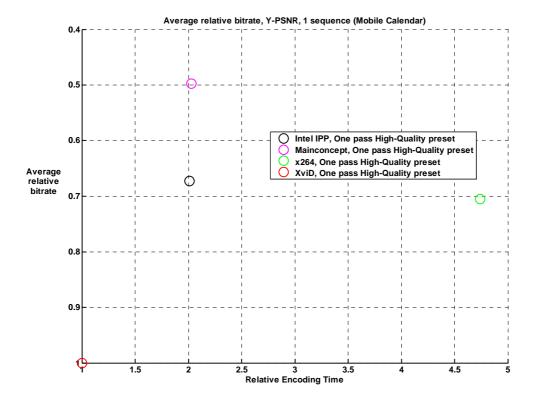


Figure 217. Speed/Quality tradeoff. Usage area "HDTV", "Mobile Calendar" sequence, "One pass High Quality" preset, Y-PSNR

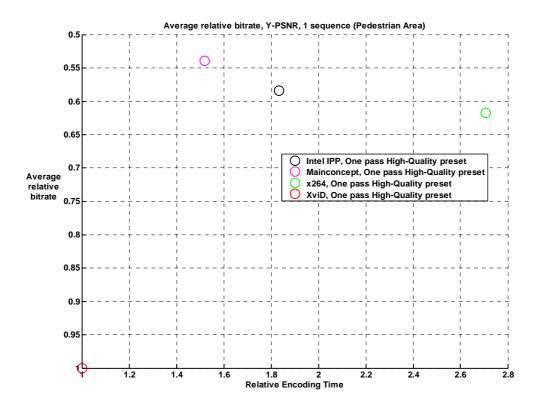


Figure 218. Speed/Quality tradeoff. Usage area "HDTV", "Pedestrian Area" sequence, "One pass High Quality" preset, Y-PSNR

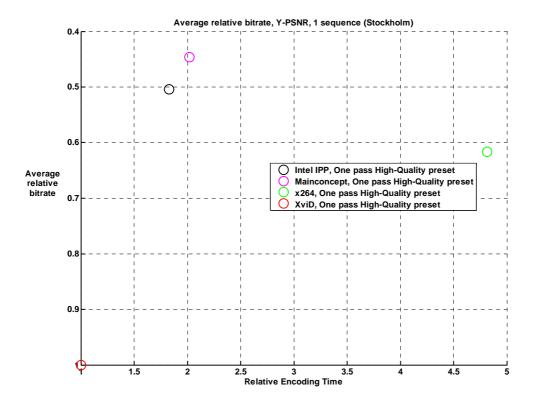


Figure 219. Speed/Quality tradeoff. Usage area "HDTV", "Stockholm" sequence, "One pass High Quality" preset, Y-PSNR

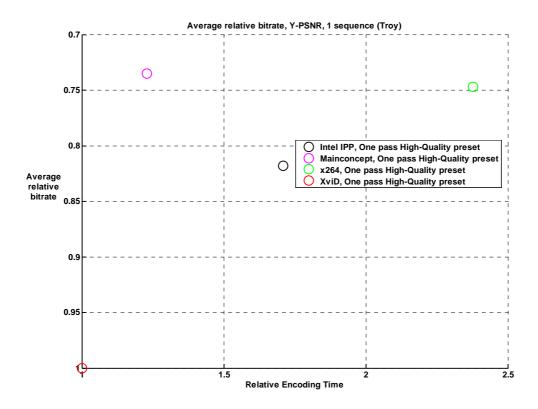


Figure 220. Speed/Quality tradeoff. Usage area "HDTV", "Troy" sequence, "One pass High Quality" preset, Y-PSNR

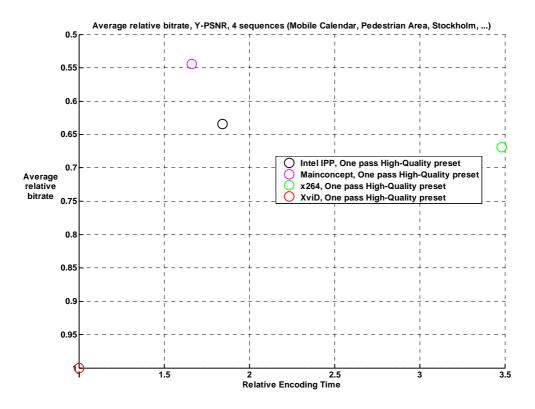


Figure 221. Speed/Quality tradeoff. Usage area "HDTV", all sequences, "One pass High Quality" preset, Y-PSNR

SSIM

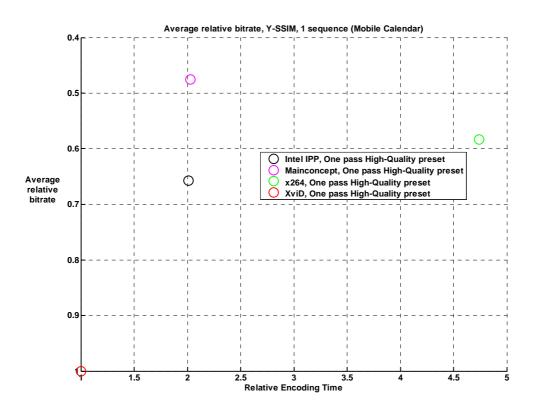


Figure 222. Speed/Quality tradeoff. Usage area "HDTV", "Mobile Calendar" sequence, "One pass High Quality" preset, Y-SSIM

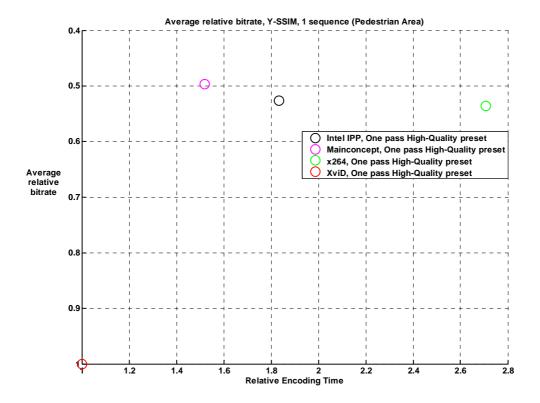


Figure 223. Speed/Quality tradeoff. Usage area "HDTV", "Pedestrian Area" sequence, "One pass High Quality" preset, Y-SSIM

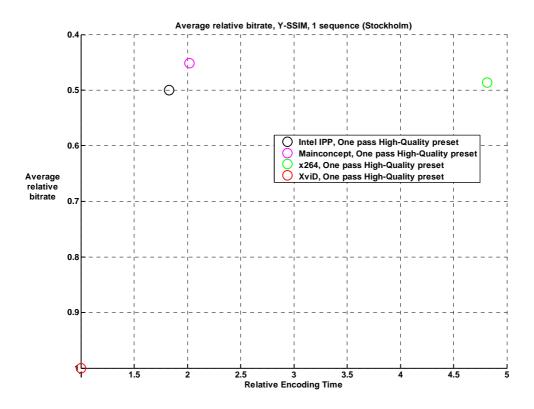


Figure 224. Speed/Quality tradeoff. Usage area "HDTV", "Stockholm" sequence, "One pass High Quality" preset, Y-SSIM

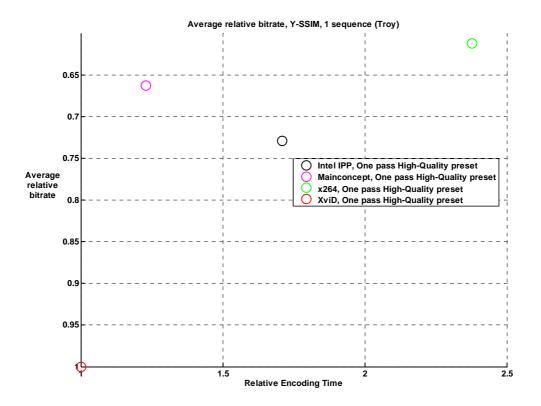


Figure 225. Speed/Quality tradeoff. Usage area "HDTV", "Troy" sequence, "One pass High Quality" preset, Y-SSIM

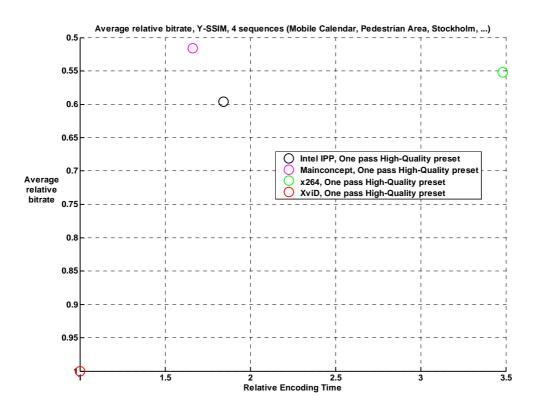


Figure 226. Speed/Quality tradeoff. Usage area "HDTV", all sequences, "One pass High Quality" preset, Y-SSIM

5.2.4 Bitrate Handling

Bitrate handling results are presented in Figure 227 through Figure 230. All encoders have good bitrate handling except XviD at low bitrates at all sequences and x264 at all bitrates at "Mobile Calendar" sequence and at low bitrates at "Stockholm" sequence.

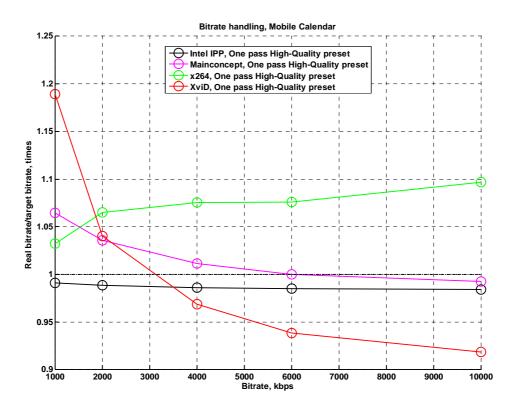


Figure 227. Bitrate Handling. Usage area "HDTV", "Mobile Calendar" sequence, "One pass High Quality" preset

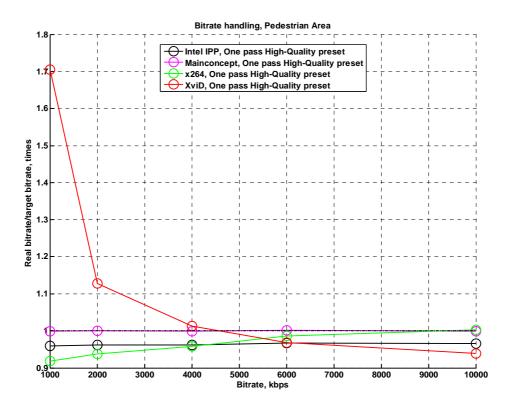


Figure 228. Bitrate Handling. Usage area "HDTV", "Pedestrian Area" sequence, "One pass High Quality" preset

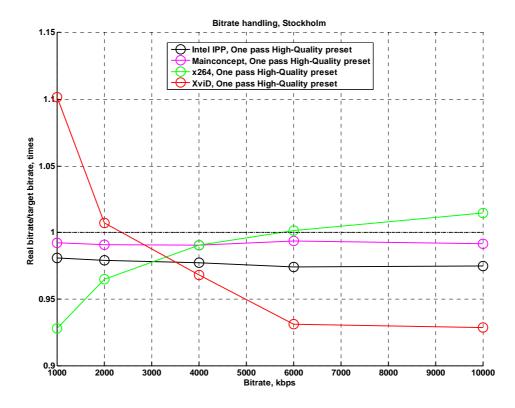


Figure 229. Bitrate Handling. Usage area "HDTV", "Stockholm" sequence, "One pass High Quality" preset

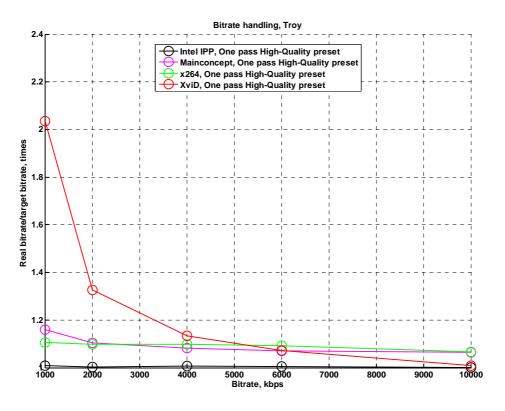


Figure 230. Bitrate Handling. Usage area "HDTV", "Troy" sequence, "One pass High Quality" preset

5.2.5 Relative Quality Analysis

Table 17 and Table 18 show relative bitrates for a fixed quality output for all codecs and presets. Note that these tables do not include information about the speed of the encoder.

The leader is MainConcept and second place depends on quality chosen metric – for Y-PSNR Intel IPP H.264 is better than x264 and for Y-SSIM x264 is better than Intel IPP H.264 and for Y-SSIM the difference between MainConcept and x264 is very small.

Table 17.Average bitrate ratio for the same quality. Usage area "HDTV"."High Quality one pass" preset, Y-PSNR.

	IPP H.264	MainConcept	x264	XviD
IPP H.264	100%	91%	112%	158%
MainConcept	110%	100%	126%	184%
x264	89%	79%	100%	149%
XviD	63%	54%	67%	100%

Table 18.Average bitrate ratio for the same quality. Usage area "HDTV"."High Quality one pass" preset, Y-SSIM.

	IPP H.264	MainConcept	x264	XviD
IPP H.264	100%	89%	91%	168%
MainConcept	112%	100%	101%	194%
x264	110%	99%	100%	181%
XviD	60%	52%	55%	100%

Figure 231 and Figure 232 visualize data in the tables above. Each line in those figures corresponds to one codec. Values in vertical axis are average relative bitrate comparing to the codecs in horizontal axis. The lower bitrate is the better relative results have the codec.

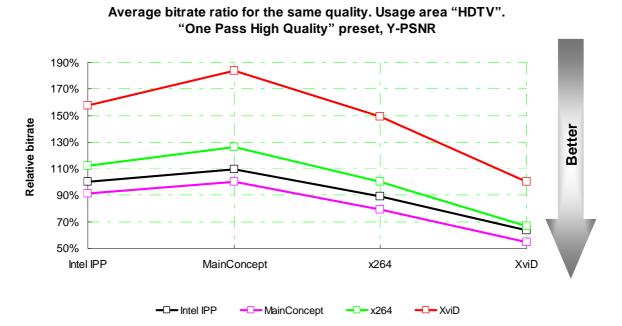


Figure 231. Average bitrate ratio for the same quality. Usage area "HDTV". "One Pass High Quality" preset, Y-PSNR.

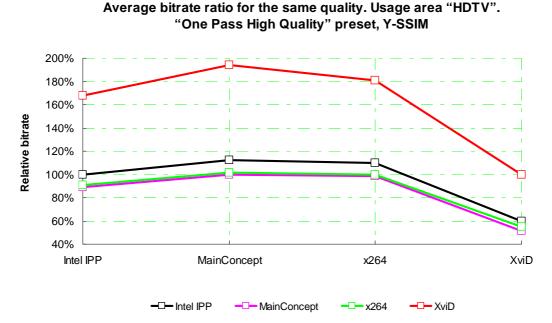


Figure 232. Average bitrate ratio for the same quality. Usage area "HDTV". "One Pass High Quality" preset, Y-SSIM.

6 Appendix 2. Codecs Analysis using Synthetic Sequences

This appendix contains some examples of codec analysis using synthetic sequences. The main purpose of this method is to track some important codec properties using specially created synthetic video sequences. Two types of analysis have been performed:

- Sequences for motion compensation quality estimation
- Sequences for moving object tail area distortion estimation

6.1 Estimation of Motion Compensation Quality

Synthetic sequences are used for detailed analysis of the motion compensation algorithm. The sequence consists of squares that move from frame to frame. Each object can be described with the following parameters:

- Texture
- Size
- Position (X, Y)
- Speed (V_x, V_y)

Textures for moving objects and for backgrounds are created using superposition of sinusoids.

The size of each object is selected randomly using a normal distribution with parameters that depend on the frame resolution.

The initial position of each square is random. Later, for each frame i+1, the position is calculated using the following formulas:

$$X_{i+1} = X_i + V_x^i$$
$$Y_{i+1} = Y_i + V_y^i$$

Calculation of the speed of the square has two stages:

- 1. Addition of a random component to the speed: a uniform random variable in the range [0, *MAX_SPEED*]. The *MAX_SPEED* constant is used to control sequence complexity.
- 2. Calculation of the correlation component for the speeds of different objects. The correlation component is used for emulating the correlation between the motion of different objects in the scene.

Figure 233 depicts an example frame from a synthetic sequence.





Figure 233. Example frame from a synthetic sequence used for motion analysis.

Two synthetic sequences with different complexities are used in this test. The first step is relative values calculation. The codec under test is launched for each synthetic sequence, and the resulting output quality is compared to that of the reference codec. Therefore, for each sequence and codec, there is one descriptive number (the average bitrate ratio, relative to the reference codec, for a fixed quality).

The final score consist of two parts:

- Encoding quality for the first version of the motion sequence (with simple motion)
- Quality variation for the second version of the motion sequence (with complex motion)

Figure 234 presents the final results for this method of codec analysis. The range of possible scores is [0, 100], with the best codec having a score of 100 and the worst codec having a score of 0. The leaders in this test are both presets of the x264, and MainConcept High Quality preset. The poorest result is demonstrated by the dicas codec.

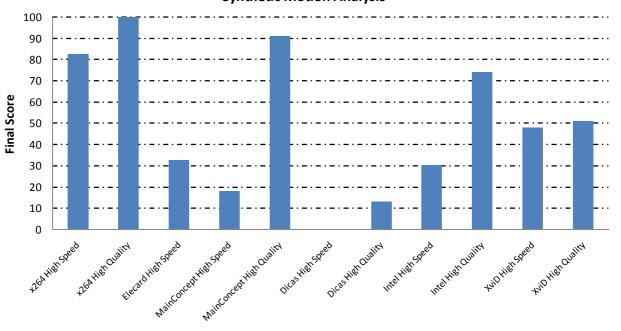

Synthetic Motion Analysis



6.2 Analysis of Distortion in Tail Area

The main purpose of tail area analysis is to test the ability of a codec to properly deal with newly appeared objects and areas.

The synthetic sequence for this analysis consists of a static background and a single moving square. The square moves from right to left with a slight random variation in speed. When the object reaches the left border of the frame, it appears again at the right border with a new Y coordinate.

MOSCOW, MAY 2009

VIDEO MPEG-4 AVC/H.264 CODECS COMPARISON CS MSU GRAPHICS & MEDIA LAB VIDEO GROUP

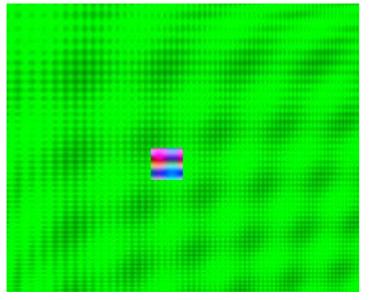


Figure 235. Synthetic sequence for tail area analysis.

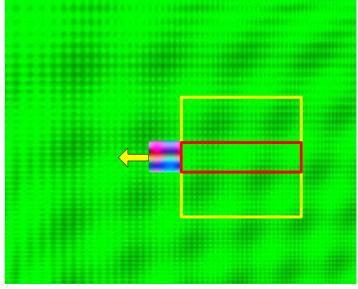


Figure 236. Areas for calculating the quality metric for tail area analysis.

The first step of the final score calculation involves computing the tail area metric for one frame. A rectangle of a specific size, located directly to the right of the moving objects, is considered. This rectangle is divided into two areas: a center area, traversed by the moving object (the red rectangle in figure above) and the remaining area (the yellow rectangle). The ratio of per-frame distortions in those areas is the tail area metric for this frame. The metric for the sequence is the average of the per-frame ratios.

Figure 235 and Figure 236 show an example of a frame from a synthetic sequence as well as the areas used for the calculation of the metrics.

Figure 237 depicts the final results for this type of analysis. The range of scores is [0, 100]. The leaders are the dicas and Intel encoders. The worst result among all the codecs is the XviD encoder.

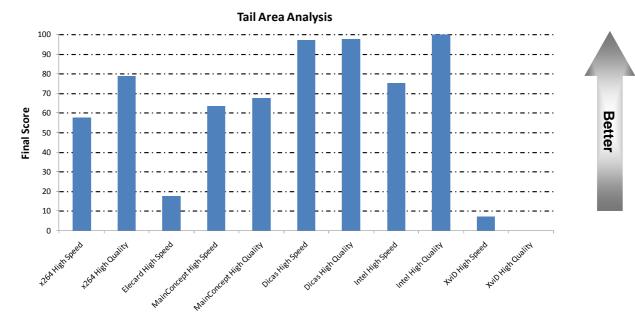


Figure 237. Final results of tail area analysis

6.3 Other Types of Analysis

The Graphics & Media Lab Video Group performs extensive research in the field of automatic codec analysis. The results of this section are just examples of codec analysis methods developed by the Video Group. Some analyzers currently being developed at the laboratory include the following:

- Blurring analyzer test codec performance for high-texture sources
- Decimation analyzer test the quality of the codec's motion estimation (ME) algorithm
- Frames with noise analyzer test the stability of the codec's frame-level rate control
- Frames with variable noise and noise macro-blocks analyzers test the quality of the codec's MB-level rate control
- Frame rotation analyzer test for errors in the codec's ME
- Synthetic motion analyzer test the quality of the codec's ME
- Tail area analyzer analysis of codec mode selection
- Edge capture analyzer analysis of codec MB subdivision selection
- Border quality analyzer analysis of codec performance for sequences with sharp edges

7 Appendix 3. x264 Over-years Comparison

To analyze the progress of codec development we have decided to compare the quality of one of H.264 codecs over-years n the same video sequence. The x264 encoder was chosen for that task because it presents in almost every MSU VIDEO MPEG-4 AVC/H.264 codecs comparison and it has good results comparing to other encoders. Figure 238 through Figure 241 show the position of x264 codec comparing to other codecs on "Battle" sequence. At all years except 2005 x264 shows the best results. For 2006-2009 years we have shown results using Y-SSIM as quality metrics, for 2005 we have not use this metric as main. Because of these results x264 could be a good reference encoder for analyzing the overall progress of H.264 encoders during last years.

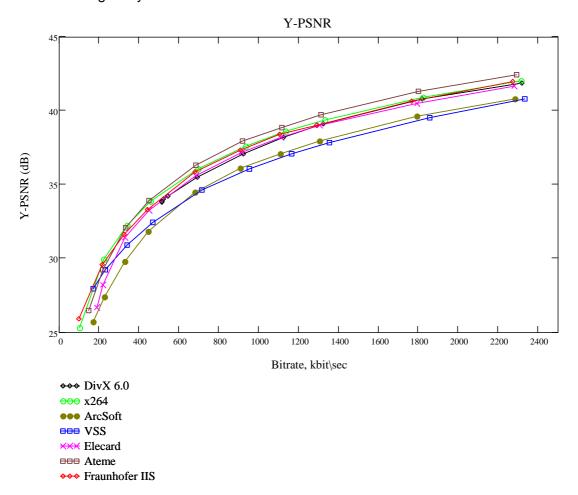


Figure 238. 2005 year. Bitrate/Quality. Usage area "Movies", "Battle" sequence, "High Quality" preset, Y-PSNR

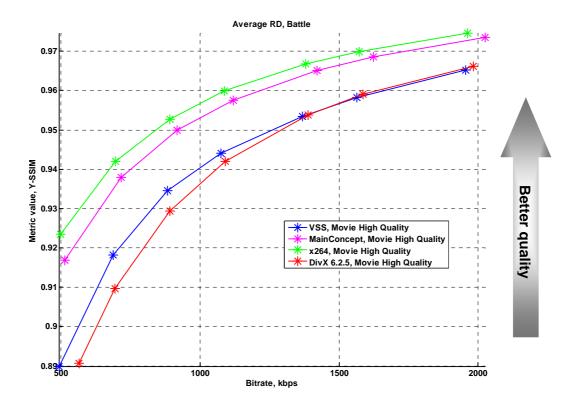


Figure 239. 2006 year. Bitrate/Quality. Usage area "Movies", "Battle" sequence, "High Quality" preset, Y-SSIM

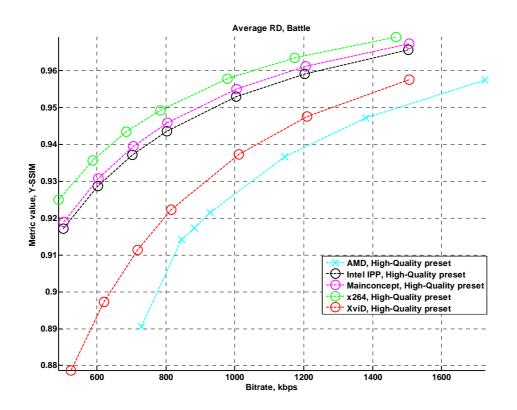


Figure 240. 2007 year. Bitrate/Quality. Usage area "Movies", "Battle" sequence, "High Quality" preset, Y-SSIM

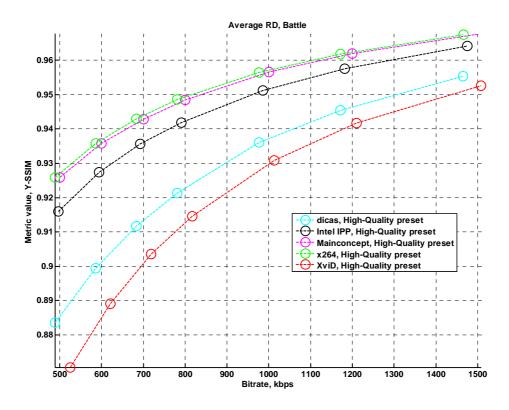


Figure 241. This year. Bitrate/Quality. Usage area "Movies", "Battle" sequence, "High Quality" preset, Y-SSIM

Figure 242 shows RD curve for "Battle" sequence for x264 encoders of different years. As one can see the best encoder is x264 of current year, and worse is for 2005 year. X264_2006 is better than x264_2007, but it could be explained by different encoding speed, that is shown at Figure 243. This figure show the overall progress very good, x264 encoder became more faster and have better quality over years.

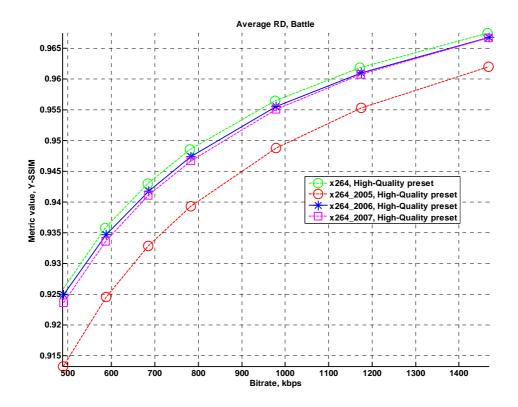


Figure 242. Different versions of x264 encoder. Bitrate/Quality. Usage area "Movies", "Battle" sequence, "High Quality" preset, Y-SSIM

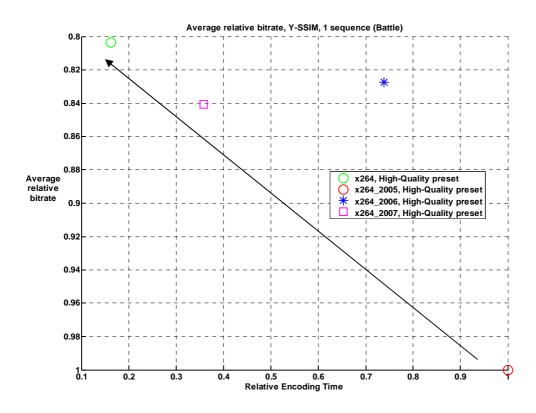


Figure 243. The progress of the x264 encoder over years. Y-SSIM

There is also one interesting fact – if to use Y-PSNR as quality metric then x264 does not show the good progress as can be seen from Figure 244 or Figure 245.

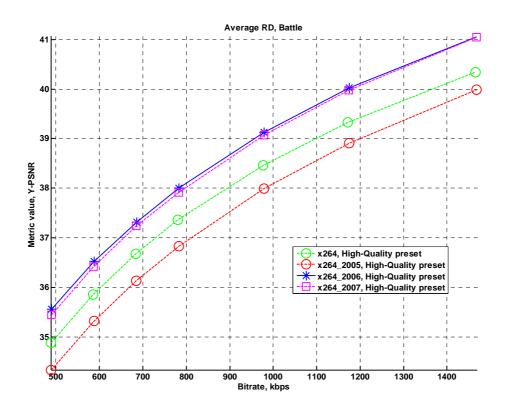


Figure 244. Different versions of x264 encoder. Bitrate/Quality. Usage area "Movies", "Battle" sequence, "High Quality" preset, Y-PSNR

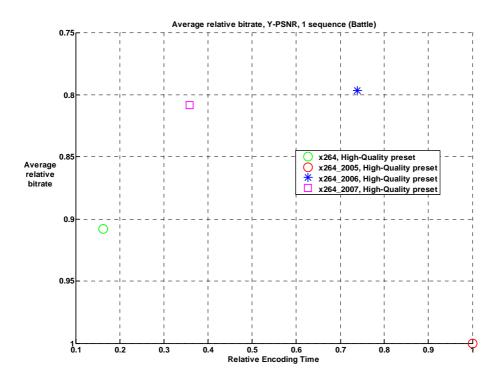


Figure 245. The progress of the x264 encoder over years. Y-PSNR

Bitrate handling mechanism for x264 encoder is quite good for every version, as one can see at Figure 246. Per frame analysis presented at Figure 247 shows that main encoding mechanism did not changed strongly.

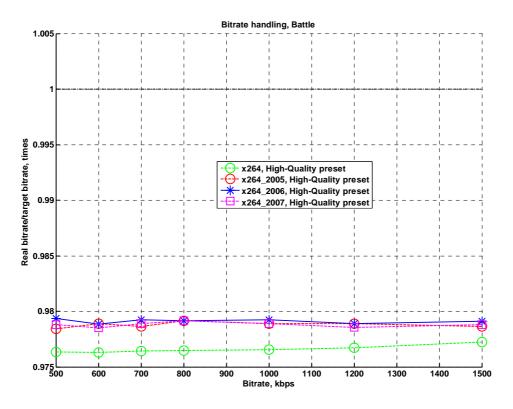


Figure 246. Different versions of x264 encoder. Bitrate handling.

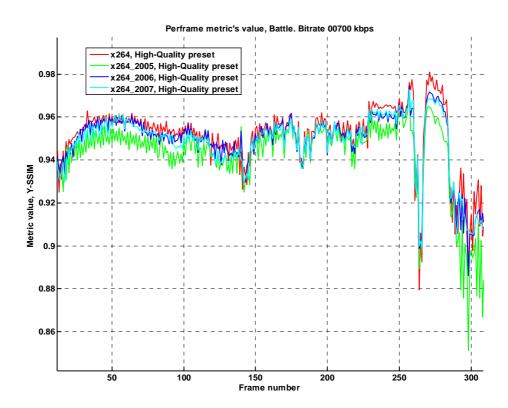


Figure 247. x264 different versions. Per frame analysis, "Battle" sequence, 700kbps

8 Appendix 4. Test Set of Video Sequences

8.1 Videoconference Sequences

8.1.1 "Akiyo"

Sequence title	Foreman
Resolution	352x288
Number of frames	300
Color space	YV12
Frames per second	30
Source	Uncompressed (standard sequence), progressive



Figure 248. Akiyo sequence, frame 1



Figure 249. Akiyo sequence, frame 190

This is well-known sequence. This sequence includes static background and foreground with very low motion – only announcer's face with not very rich mimic. As a result, this sequence can e used to test the behavior of the codec for almost static scene.

Sequence title	Foreman
Resolution	352x288
Number of frames	300
Color space	YV12
Frames per second	30
Source	Uncompressed (standard sequence), progressive

8.1.2 "Foreman"





Figure 250. Foreman sequence, frame 77

Figure 251. Foreman sequence, frame 258

This is one of the most well-known sequences. The sequence includes a face with very rich mimic. There is not a high level of motion, but the motion that is present is disordered and does not have any forward characteristics. The intricate character of the motion creates problems for the motion compensation process. In addition, the camera is shaking, thus making the image unsteady. At the end of the sequence, the camera suddenly turns to the building site, and another scene with almost no motion follows. As a result, this sequence can also be used to test the behavior of the codec for a static scene that follows one with abundant motion.

VIDEO MPEG-4 AVC/H.264 CODECS COMPARISON CS MSU GRAPHICS & MEDIA LAB VIDEO GROUP

8.1.3 "Paris"

Sequence title	Paris
Resolution	352x288
Number of frames	1065
Color space	YV12
Frames per second	30
Source	Uncompressed (standard sequence), progressive





Figure 252. Paris sequence, frame 1

Figure 253. Paris sequence, frame 754

This well-known sequence presents two television announcers in front of a static background. In this sequence there are some little objects with high level of motion, such as: pen, fingers and a ball. Therefore, this sequence can be used to test the behavior of a codec for a mostly static scene with an area of intensive motion.

8.1.4 "Stefan"

Sequence title	Stefan
Resolution	352x288
Number of frames	300
Color space	YV12
Frames per second	30
Source	Uncompressed (standard sequence), progressive






Figure 255. Stefan sequence, frame 251

This standard sequence presents a sport video with high level of motion. There are two types of motion – the camera motion and sportsmen motion. The first one is not very difficult to estimate, but the second one is very difficult ot estimate and to compensate. Therefore, this sequence can be used to test the behavior of a codec for sport translation or sequences with high level of motion.

8.2 Movie Sequences

8.2.1 "Indiana Jones"

Sequence title	Indiana Jones
Resolution	704x288
Number of frames	5000
Color space	YV12
Frames per second	30
Source	MPEG-2 (DVD), FlaskMPEG deinterlace



Figure 256. Indiana Jones sequence, frame 1

This sequence is a fragment from the "Indiana Jones" movie. In terms of compression, this sequence difficult because of two main reasons: of low contrast parts present and high level of motion in different scenes. And there are scenes with highly different types of motion – from almost static scenes with talking people to scenes with strong motions, like for example scene where stones fall.

Sequence title	Battle
Resolution	704x288
Number of frames	1599
Color space	YV12
Frames per second	24
Source	MPEG-2 (DVD), FlaskMPEG deinterlace



Figure 257. Battle sequence, frame 839

This sequence is a fragment from the beginning of the "Terminator 2" movie. In terms of compression, this sequence is the most difficult among all of the sequences that were used in the analysis. This difficulty is due to three main reasons: continual brightness variation (resulting from explosions and laser flashes as seen in the picture above), very fast motion and frequent scene changes. These characteristics often cause codecs to compress frames as Iframes. 8.2.3 "State Enemy"

Sequence title	State Enemy
Resolution	720x304
Number of frames	6500
Color space	YV12
Frames per second	24
Source	MPEG-2 (DVD), FlaskMPEG deinterlace






Figure 258. State Enemy sequence, frame 1115

This sequence is a fragment from the "Enemy of the State" movie. This sequence includes outdoor scenes with strong motion at the beginning when bicyclist runs, scenes with low motion and indoor scenes with normal motion. This sequence has scenes with different lightning conditions.

8.2.4 "Wendys"

Sequence title	Wendys
Resolution	720x576
Number of frames	260
Color space	YV12
Frames per second	30
Source	Uncompressed, progressive



Figure 259. Wendys sequence, frame 97

This sequence presents Wendy's restaurant inside environment. This sequence is interest for strong grain during all the sequence and strong motion sometimes – these factors could lead to difficulties during compression for all tested codecs.

8.3 HDTV Sequences

8.3.1 "Mobile Calendar"

Sequence title	Mobile Calendar
Resolution	1280x720
Number of frames	504
Color space	YV12
Frames per second	50
Source	Uncompressed, progressive



Figure 260. Mobile Calendar sequence, frame 416

Similar to Mobile&Calendar. Close up. Moving calendar with text and a detailed photo of the Vasa ship. Moving train with colorful toys. Background with two types of wallpaper, one brown with details and one yellow with drawn figures. Very detailed and normally demanding. The main compression difficulty that could take place is many little sharp details in the sequence on the calendar and on the background.

Sequence title	Pedestrian Area
Resolution	1920x1080
Number of frames	375
Color space	YV12
Frames per second	25
Source	Uncompressed, progressive



Figure 261. Pedestrian Area sequence, frame 129

This is a shot of a pedestrian area. This sequence has low camera position, and people pass by very close to the camera. High depth of field. Static camera. This sequence is interesting for compression because of static camera and areas of different focusing and blurring/sharpening.

8.3.2 "Pedestrian Area"

8.3.3 "Stockholm"

Sequence title	Stockholm
Resolution	1280x720
Number of frames	604
Color space	YV12
Frames per second	50
Source	Uncompressed, progressive



Figure 262. Pedestrian Area sequence, frame 574

Panning view over the Old Town of Stockholm. Detailed houses, water and moving cars. Panning view over the Old Town of Stockholm. Detailed houses, water and moving cars. This sequence is interesting for compression because of high level of noise and sharp details in the scenes and moving camera and objects such as cars a and water.

8.3.4 "Troy"

0 (11)	.	
Sequence title	Troy	
Resolution	1920x1072	
Number of frames	300	
Color space	YV12	
Frames per second	24	
Source	MPEG-2 (DVD)	



Figure 263. Troy sequence, frame 1

This sequence is a fragment of the "Troy" movie and contains three parts with sharp scene changes. The video includes medium scene motion and slow camera motion. In terms of compression, this sequence is difficult to compress because of the many small details.

9 Appendix 5. Tested Codecs and Presets

9.1 Codecs


9.1.1 dicas' mpegable H.264 Command-line encoder

- Console encoding program
- dicas decoder was used for decoding
- Codec and presets were provided by dicas digital image coding GmbH specifically for this test

Remarks:

No remarks.

```
Usage: H264VidEncoder <yuv src file> <options>
                                                                                            *
out <output_file>
                            Name of the compressed output-file
size <width> <height>
                            Original image size
resize <width> <height> Image size to use for encoding
region <xoffset> <yoffset> <width> <height>
active region in encoded image to show on decoder side
keyframe period <0=only first frame, 1=all>
                            Number of frames to decode
frames <nr>
rec <filename>
                            Reconstructed output file
                            Enables SNR calculation
รกษ
                            Between O (fastest) and 4 (slowest)
 speed <nr>
                            Disable deblocking filter
nofilter
cavlc
                            Use CAVLC encoding (Baseline Profile)
 mbaff
                            Enables the MB-Aff coding mode
bframe <cnt>
                            Number of max B-Frames
 adaptive_bframes
                                      Enables adaptive B-Frames. Use -bframe to set
the max number.
-bitrate <KBits per sec> Enable rate control with given bitrate
uburate <KBits per sec> ubu drain per second (default=bitrate).
 vbv <KBits>
                            set vbv buffer size
noscenecut
                            disable scene-cut detection
fps <frames per second> Assumed framerate for rate control
                            Num Frames to look ahead (default=100, min=50, max=1024
lookahead <num>
-guant <guantizer>
                            use constant quantizer (0..51) instead of constant bitr
ate
                            Disables all platform specific optimizations( enables C
-C
-code >
 use_nal_del
                            Insert NAL-Access-Delimiters at the start of each slice
```



9.1.2 Elecard AVC Video Encoder 8-bit edition

- Console encoding program version 3.9.4
- Reference decoder JM 9.8 was used for decoding
- Codec and presets were provided by Elecard Ltd Company specifically for this test

Remarks:

No remarks.

C:\WINDOWS\system32\cmd.exe	- - x
Elecard AVC Video Encoder 8-bit edition, ver. 0.0 (build Feb 17 2009)	▲
usage: avcenc config.cfg [parameters list]	▼

Figure 265. Elecard AVC Video Encoder 8-bit edition

9.1.3 Intel IPP H.264 enc

- Console encoding program is released as part of "IPP 6.1 Gold" media samples
- Reference decoder JM 9.8 was used for decoding
- Codec and presets were provided by Intel Corp specifically for this test

Remarks:

No remarks.

C:\WINDOWS\system32\cmd.exe
T:\H264_2009\framework\codecs\intel>video_enc_con Error: Destination file name not found Usage1: video_enc_con [m2 m4 h264 h263 h261 dv_sd dv_50 dv_hd vc1 avs] [Options] InputParFile OutputEncodedFile Usage2: video_enc_con [m2 m4 h264 h263 h261 dv_sd dv_50 dv_hd vc1 avs] [Options]
-i InputYUVFile -o OutputEncodedFile Options: [-a file] - file for auxiliary pictures for alpha blending for H.264 encoder [-s file] - file for reconstructed frames (H.264 only!!!).
[-i inputFile] - input YUV video file [-w width] - video width [-h height] - video height [-f frameRate] - video frame rate (frames per second)
[-b bitRate] - encoded bit rate (bits per second) [-n numFrames] - max frames to encode [-t num] - number of threads for encoding [-y dir] - directory of YUV files, names are taken from par files [-u file] - file for dumping perfomance info
[-p file.csv] – file for dumping perfomance info into csv format Note: Options -i,-w,-h,-f,-b,-n override corresponding values inside InputParFil e.
If InputParFile not specified, at least options -w,-h should be specified and -o should be added before OutputEncodedFile.



9.1.4 MainConcept H.264/AVC encoder

- Console encoding program based on MainConcept CodecSDK 8.1
- Reference decoder JM 9.8 was used for decoding
- Codec and presets were provided by MainConcept AG Company specifically for this test

Remarks:

No remarks.

```
C:\WINDOWS\system32\cmd.exe
MainConcept (Broadcast) H.264/AVC encoder (build 8.0.0 at 2009/02/11 rev. 41900)
Copyright (c) 2009 MainConcept GmbH
THIS SOFTWARE IS FOR EVALUATION PURPOSES ONLY!
```

Figure 267. MainConcept H.264/AVC encoder

9.1.5 x264 encoder

- Console encoding program
- Reference decoder JM 9.8 was used for decoding
- Codec and presets were provided by developers specifically for this test

Remarks:

No remarks.

```
x264 core:67 r1123M 3d78062
Syntax: x264 [options] —o outfile infile [widthxheight]
Infile can be raw YUU 4:2:0 (in which case resolution is required),
or YUU4MPEG 4:2:0 (*.y4m),
or AVI or Avisynth if compiled with AVIS support (yes).
Outfile type is selected by filename:
.264 -> Raw bytestream
  .mky -> Matroska
.mp4 -> MP4 if compiled with GPAC support (no)
Options:
                                                          List the more commonly used options
List all options
    -h, --help
             --longhelp
Frame-type options:
               -keyint <integer>
-bframes <integer>
-b-pyramid
                                                          Maximum GOP size [250]
Number of B-frames between I and P [0]
Keep some B-frames as references
     ۰h
                                                          Disable CABAC
Number of reference frames [1]
Loop filter AlphaCO and Beta parameters [0:0]
Enable pure-interlaced mode
               -no-cabac
-ref <int
                      <integer>
               deblock <alpha:beta>
                interlaced
```

Figure 268. x264 encoder

9.1.6 Xvid encoder

- Console encoding program
- Codec and presets were provided by developers especially for this test

Remarks:

No remarks.

🛋 C:\WINDOWS\system32\cmd.exe - xvid_encraw 📃 🗆 🗙 xvid_encraw - raw mpeg4 bitstream encoder written by Christoph Lampert 2002-2003 🔺

Figure 269. Xvid encoder

9.2 Presets

The table below lists the settings used in this comparison for all of the codecs.

Codec	Preset Name	Preset
Xvid	VideoConference	-max_bframes 2 -quality 6 -vhqmode 1
	"High Speed"	-bvhq -qpel -turbo -single
	VideoConference	-max_bframes 2 -quality 6 -vhqmode 4
	"High Quality"	-bvhq -qpel -turbo -single
	Movie	-max_bframes 2 -quality 6 -vhqmode 1
	"High Speed"	-bvhq -single
	Movie	-max_bframes 2 -quality 6 -vhqmode 4
	"High Quality"	-bvhq -gmc -single
	HDTV	-max_bframes 2 -quality 6 -vhqmode 1
	"High Speed"	-bvhq -turbo -single
	HDTV	-max_bframes 2 -quality 6 -vhqmode 4
	"High Quality"	-bvhq -gmc -single
MainConcept		HadamardTransform = 0
	"High Speed"	FastMRME = 1
		NumRefFrames = 7
		SearchRange = 63
		FastIntraDecision = 0
		FastSBME = 0
	VideoConference	HadamardTransform = 1
	"High Quality"	FastMRME = 0
	Movie	NumRefFrames = 4
	"High Speed"	SearchRange = 127
		FastIntraDecision = 2
	Maxia	FastSBME = 2
	Movie	First pass:
	"High Quality"	NumRefFrames = 4 SearchRange = 127
		FastIntraDecision = 1
		FastSBME = 1
		Second pass:
		SearchRange = 255
		HadamardTransform = 1
		FastMRME = 0
	Movie	SearchRange = 255
	"High Quality	HadamardTransform = 1
	one Pass"	FastMRME = 0
	HDTV	NumRefFrames = 5
	"High Speed"	SearchRange = 511
		HadamardTransform = 1
		FastIntraDecision = 2
		FastSBME = 2

		ii
	HDTV "High Quality"	First pass:NumRefFrames= 5SearchRange= 511FastIntraDecision= 1FastMRME= 0Second pass: $NumRefFrames$ NumRefFrames= 7SearchRange= 511HadamardTransform= 1FastMRME= 0
	HDTV "High Quality one pass"	SearchRange = 511 HadamardTransform = 1 FastMRME = 0
Elecard	VideoConference "High Speed"	Profile 77 // Main Intra8x8InI 0 Intra8x8InP 0 Intra8x8InB 0
	"Movie "High Speed"	Profile100 // HighIntra8x8InI1Intra8x8InP1Intra8x8InB1
	HDTV "High Speed"	Profile100 // HighModeDecision0 // 0 - SADIntra8x8InI1Intra8x8InP1Intra8x8InB1
Intel	"High Speed"	 21 /* number of B frames between I (or P) and the next P, treat B as a reference (only 0 is supported!) */ 610 /* num_ref_frames (2-16), minimum length of list1 for backward prediction (only 1 is supported!), number of slices. */ 3 /* frame_rate_code */ 2 2 12 12 /* ME method (1-6), subblock split, search_x, search_y */
	"High Quality"	1 1/* number of B framesbetween I (or P) and the next P, treat B asa reference (only 0 is supported!) */1 1/* number of B framesbetween I (or P) and the next P, treat B asa reference (only 0 is supported!) */5/* frame_rate_code */2 0 8 8/* ME method (1-6),subblock split, search_x, search_y */

		1
x264	VideoConference "High Speed"	no-psnrno-ssimbframes 3b- pyramidkeyint 500threads autopsy- rd 0subme 7ref 7aq-strength 1.25 8x8dctme umhtrellis 2b-adapt 0 scenecut -1ratetol 10mixed-refs partitions all
	VideoConference "High Quality"	no-psnrno-ssimbframes 3b- pyramidkeyint 500threads autopsy- rd 0subme 7ref 7aq-strength 1.25 8x8dctme umhtrellis 2b-adapt 0 scenecut -1ratetol 10mixed-refs partitions all
	Movie "High Speed"	First pass: no-psnrno-ssimbframes 3b- pyramidkeyint 500threads autopsy- rd 0pass 1subme 1direct autob- adapt 1partitions none
		Second pass: no-psnrno-ssimbframes 3b- pyramidkeyint 500threads autopsy- rd 0pass 2subme 8direct autoref 4 8x8dctme umhmerange 8trellis 1
	Movie "High Quality"	<i>First pass:</i> no-psnrno-ssimbframes 3b- pyramidkeyint 500threads autopsy- rd 0pass 1subme 7direct autob- adapt 2
		Second pass: no-psnrno-ssimbframes 3b- pyramidkeyint 500threads autopsy- rd 0pass 2subme 11direct auto ref 78x8dctme umhtrellis 2mixed- refs
	Movie "High Quality one pass"	no-psnrno-ssimbframes 3b- pyramidmixed-refskeyint 500threads autopsy-rd 0subme 11ref 88x8dct me umhtrellis 2ratetol 10b-adapt 2 partitions all
	HDTV "High Speed"	First pass: no-psnrno-ssimbframes 3b- pyramidkeyint 500threads autopsy- rd 0pass 2subme 11direct auto ref 78x8dctme umhtrellis 2mixed-

		refs
		Second pass: no-psnrno-ssimbframes 3b- pyramidkeyint 500threads autopsy- rd 0pass 2subme 11direct auto ref 78x8dctme umhtrellis 2mixed- refs
HDTV "High Q	uality"	First pass: no-psnrno-ssimbframes 3b- pyramidkeyint 500threads autopsy- rd 0pass 1subme 7direct autob- adapt 2
		Second pass: no-psnrno-ssimbframes 3b- pyramidmixed-refskeyint 500threads autopsy-rd 0subme 10ref 58x8dct me esatrellis 2ratetol 10b-adapt 2 - -partitions all
HDTV "High Q pass"	uality one	no-psnrno-ssimbframes 3b- pyramidmixed-refskeyint 500threads autopsy-rd 0subme 10ref 58x8dct me esatrellis 2ratetol 10b-adapt 2 - -partitions all

10 Appendix 6. Figures Explanation

The main charts in this comparison are classical RD curves (quality/bitrate graphs) and relative bitrate/relative time charts. Additionally, bitrate handling charts (ratio of real and target bitrates) and per-frame quality charts were also used.

10.1.1.1 RD curves

These charts show variation in codec quality by bitrate or file size. For this metric, a higher curve presumably indicates better quality.

10.1.1.2 Relative Bitrate/Relative Time Charts

Relative bitrate/relative time charts show the dependence on relative encoding time of the average bitrate for a fixed quality output. The Y-axis shows the ratio of the bitrate of the codec under test to that of the reference codec for a fixed quality. A lower value (that is, the higher the value is on the graph) indicates a better-performing codec. For example, a value of 0.7 means that codec under test can encode the sequence under test in a file that is 30% smaller than that encoded by the reference codec.

The X-axis shows the relative encoding time for the codec under test. Larger values indicate a slower codec. For example, a value of 2.5 means that the codec under test works 2.5 times slower, on average, than the reference codec.

10.1.1.3 Graph Example

Figure 270 shows a case where these graphs can be useful. In the top left graph, it is apparent that the "Green" codec encodes with significantly better quality than the "Black" codec. On the other hand, the top right graph shows that the "Green" codec is slightly slower. Relative bitrate/relative time graphs can be useful in precisely these situations: it is clearly visible in the bottom graph that one of the codecs is slower, but yields higher visual quality, and that the other codec is faster, but yields lower visual quality.

r

2.2

VIDEO MPEG-4 AVC/H.264 CODECS COMPARISON CS MSU GRAPHICS & MEDIA LAB VIDEO GROUP

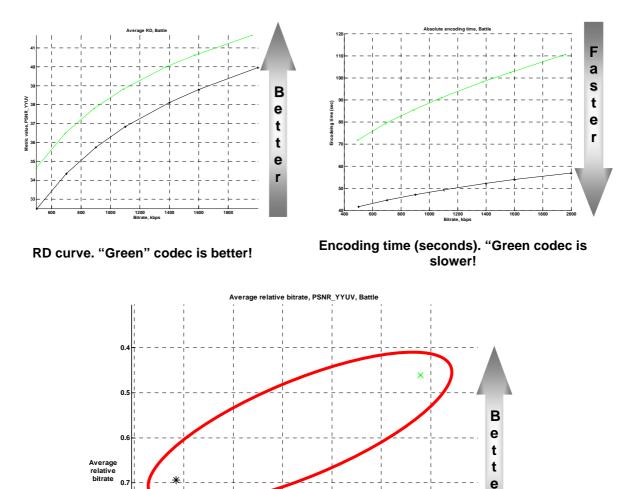


Figure 270. Integral situation with codecs. This plot shows the situation more clearly.

1.6 1.8 Relative Encoding Time

As a result of these advantages, relative bitrate/relative time graphs are used frequently in this report since they assist in the evaluation of the codecs in the test set, especially when number of codecs is large.

Faster

A more detailed description of the preparation of these graphs is given below.

10.2 Bitrates Ratio with the Same Quality

1.4

The first step in computing the average bitrate ratio for a fixed quality is inversion of the axes of the bitrate/quality graph (see Figure 272). All further computations are performed using the inverted graph.

The second step involves averaging the interval over which the quality axis is chosen. Averaging is performed only over those segments for which there are results for both codecs. This limitation is due to the difficulty of developing extrapolation methods for classic RD curves; nevertheless, for interpolation of RD curves, even linear methods are acceptable.

The final step is calculation of the area under the curves in the chosen interpolation segment and determination of their ratio (see Figure 273). This

0.

0.9

1.2

result is an average bitrate ratio for a fixed quality for the two codecs. If more than two codecs are considered, then one of them is defined as a reference codec and the quality of others is compared to that of the reference.

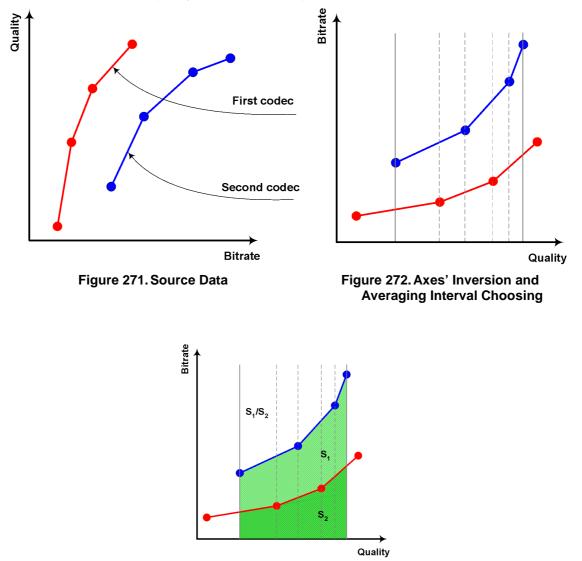


Figure 273. Areas' under Curves Ratio

10.3 Relative Codec Encoding Time Computation

To compute the relative processing time of two codecs for a particular video sequence, the encoding time is calculated for both codecs (the encoding times are summed for all bitrates) and the ratio is taken. For three or more codecs, one codec is chosen as a reference and the ratio of its encoding time to that of the others is calculated.

For multiple sequences, each codec is assigned an arithmetic mean of average relative encoding times for each sequence.

11 Appendix 7. Objective Quality Metrics Description

11.1 PSNR (Peak Signal-to-Noise Ratio)

11.1.1 Brief Description

This metric, which is often used in actual practice, is called the peak signal-tonoise ratio, or PSNR.

$$d(X,Y) = 10 \cdot \log_{10} \frac{255^2 \cdot m \cdot n}{\sum_{i=1, i=1}^{m, n} (x_{ij} - y_{ij})^2},$$

Where d(X, Y) - PSNR value between X and Y frames

 x_{ij} – the pixel value for (*i*,*j*) position for the X frame

 y_{ij} – the pixel value for (*i*,*j*) position for the Y frame

m,*n* – frame size *mxn*

Generally, this metric has the same form as the mean square error (MSE), but it is more convenient to use because of the logarithmic scale. It still has the same disadvantages as the MSE metric, however.

In MSU Video Quality Measurement Tool the PSNR can be calculated for all YUV and RGB components and for the L component of LUV color space. The PSNR value is quick and easy to calculate, but it is sometimes inappropriate as relates to human visual perception.

A maximum deviation of 255 is used for the PSNR for the RGB and YUV color components because, in YUV files, there is 1 byte for each color component. The maximum possible difference, therefore, is 255. For the LUV color space, the maximum deviation is 100.

The values of the PSNR in the LUV color space are in the range [0, 100]; the value 100 means that the frames are identical.

11.1.2 Examples

PSNR visualization uses different colors for better visual representation:

- Black value is very small (99 100)
- Blue value is small (35 99)
- Green value is moderate (20 35)
- Yellow –value is high (17 20)
- Red –value is very high (0 17)

The following is an example of the PSNR metric:



Original

Processed Figure 274. **PSNR** example for two frames



The following are further examples demonstrating how various distortions can influence the PSNR value.


Image with added noise






Blurred image Sharpen image Figure 275. Original and processed images (for PSNR example)

Next are the PSNR values for the Y-plane for these images

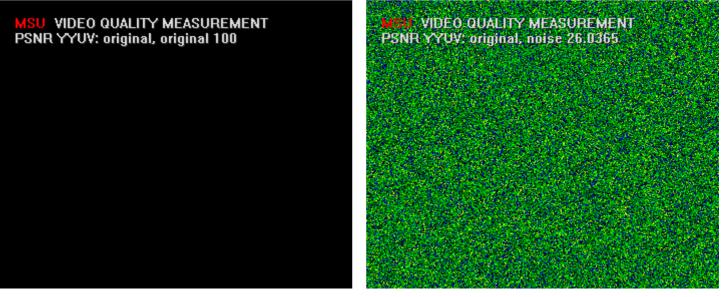

PSNR for image with itself, value = 0

PSNR for image with noisy image, value = 26.0365

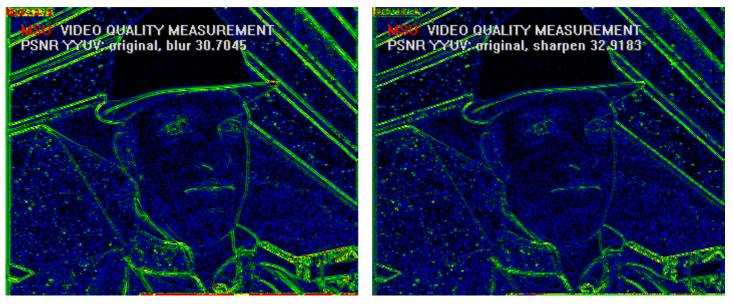

PSNR for image with blurred image, value = 30.7045

PSNR for image with sharpen image, value = 32.9183

Figure 276. PSNR values for original and processed images

11.2 SSIM (Structural SIMilarity)

11.2.1 Brief Description

The original paper on the SSIM metric was published by Wang, et al.¹ The paper can be found at the following URL: <u>http://ieeexplore.ieee.org/iel5/83/28667/01284395.pdf</u>

The SSIM author homepage is found at the following URL: <u>http://www.cns.nyu.edu/~lcv/ssim/</u>

The scheme of SSIM calculation can be presented as follows. The main idea that underlies the structural similarity (SSIM) index is comparison of the distortion of three image components:

- Luminance
- Contrast
- Structure

The final formula, after combining these comparisons, is the following:

$$SSIM(x,y) = \frac{(2\mu_x\mu_y + C_1)(2\sigma_{xy} + C_2)}{(\mu_x + \mu_y + C_1)(\sigma_x + \sigma_y + C_2)}$$

where

$$\mu_{x} = \sum_{i=1}^{N} \omega_{i} x_{i}$$
$$\sigma_{x} = \left(\sum_{i=1}^{N} \omega_{i} (x_{i} - \mu_{x})\right)^{\frac{1}{2}}$$
$$\sigma_{xy} = \sum_{i=1}^{N} \omega_{i} (x_{i} - \mu_{x}) (y_{i} - \mu_{y})$$

The constants C₁ and C₂ are defined according to the following expressions:

$$C_1 = (K_1 L)^2$$

 $C_2 = (K_2 L)^2$

where *L* is the dynamic range of the pixel values (255 for 8-bit grayscale images), and K_1 , $K_2 << 1$.

The values $K_1 = 0.01$ and $K_2 = 0.03$ were used for the comparison presented in this report, and the matrix filled with a value "1" in each position to form a filter for the result map.

For the implementation used in this comparison, one SSIM value corresponds to two sequences. The value is in the range [-1, 1], with higher values being more desirable (a value of 1 corresponds to identical frames). One of the advantages of the SSIM metric is that it better represents human visual perception than does PSNR. SSIM is more complex, however, and takes more time to calculate.

¹ Zhou Wang, Alan Conrad Bovik, Hamid Rahim Sheikh and Eero P. Simoncelli, "Image Quality Assessment: From Error Visibility to Structural Similarity," *IEEE Transactions on Image Processing*, Vol. 13, No. 4, April 2004.

11.2.2 Examples

The following is an example of an SSIM result for an original and processed (compressed with lossy compression) image. The resulting value of 0.9 demonstrates that the two images are very similar.




Original Processed SSIM Figure 277. SSIM example for compressed image The following are more examples how various types of distortion influence the SSIM value.





Original image

Image with added noise





Blurred imageSharpen imageFigure 278.Original and processed images (for SSIM example)

VIDEO QUALITY MEASURE

YYUV: original, noise 0.552


The SSIM values for the Y-plane for these images are given below.



SSIM for image with itself, value = 1

SSIM for image with noisy image, value = 0.552119

VIDEO QUALITY MEASUREMENT

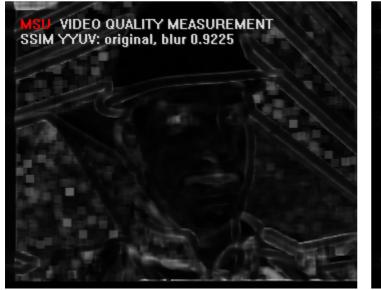

SSIM for image with blurred image, value = 0.9225

SSIM YYUV: original, sharpen 0.958917

SSIM for image with sharpen image, value = 0.958917

Figure 279.

SSIM values for original and processed images

12 List of Figures

Figure 1. Bitrate/Quality. Usage area "Video Conferences", "Akiyo" sequence, "High Quality" preset, Y-PSNR	10
Figure 2. Bitrate/Quality. Usage area "Video Conferences", "Foreman"	
sequence, "High Quality" preset, Y-PSNR	.11
Figure 3. Bitrate/Quality. Usage area "Video Conferences", "Paris"	
sequence, "High Quality" preset, Y-PSNR	.11
Figure 4. Bitrate/Quality. Usage area "Video Conferences", "Stefan"	
sequence, "High Quality" preset, Y-PSNR	.12
Figure 5. Bitrate/Quality. Usage area "Video Conferences", "Akiyo"	
sequence, "High Quality" preset, Y-SSIM	.12
Figure 6. Bitrate/Quality. Usage area "Video Conferences", "Foreman"	
sequence, "High Quality" preset, Y-SSIM	.13
Figure 7. Bitrate/Quality. Usage area "Video Conferences", "Paris"	
sequence, "High Quality" preset, Y-SSIM	.13
Figure 8. Bitrate/Quality. Usage area "Video Conferences", "Stefan"	
sequence, "High Quality" preset, Y-SSIM	.14
Figure 9. Bitrate/Quality. Usage area "Video Conferences", "Akiyo"	
sequence, "High Speed" preset, Y-PSNR	15
Figure 10. Bitrate/Quality. Usage area "Video Conferences", "Foreman"	
sequence, "High Speed" preset, Y-PSNR	16
Figure 11. Bitrate/Quality. Usage area "Video Conferences", "Paris"	10
	16
sequence, "High Speed" preset, Y-PSNR	10
Figure 12. Bitrate/Quality. Usage area "Video Conferences", "Stefan"	47
sequence, "High Speed" preset, Y-PSNR	17
Figure 13. Bitrate/Quality. Usage area "Video Conferences", "Akiyo"	
sequence, "High Speed" preset, Y-SSIM	.17
Figure 14. Bitrate/Quality. Usage area "Video Conferences", "Foreman"	
sequence, "High Speed" preset, Y-SSIM	.18
Figure 15. Bitrate/Quality. Usage area "Video Conferences", "Paris"	
sequence, "High Speed" preset, Y-SSIM	.18
Figure 16. Bitrate/Quality. Usage area "Video Conferences", "Stefan"	
sequence, "High Speed" preset, Y-SSIM	.19
Figure 17. Encoding speed. Usage area "Video Conferences", "Akiyo"	
sequence, "High Quality" preset	.20
Figure 18. Encoding speed. Usage area "Video Conferences", "Foremar	ו"
sequence, "High Quality" preset	.21
Figure 19. Encoding speed. Usage area "Video Conferences", "Paris"	
sequence, "High Quality" preset	.21
Figure 20. Encoding speed. Usage area "Video Conferences", "Stefan"	
sequence, "High Quality" preset	.22
Figure 21. Encoding speed. Usage area "Video Conferences", "Akiyo"	
sequence, "High Speed" preset	22
Figure 22. Encoding speed. Usage area "Video Conferences", "Foremar	
sequence, "High Speed" preset Figure 23. Encoding speed. Usage area "Video Conferences", "Paris"	
sequence, "High Speed" preset	

Figure 24. Encoding speed. Usage area "Video Conferences", "Stefan'	,
sequence, "High Speed" preset	24
Figure 25. Speed/Quality tradeoff. Usage area "Video Conferences",	
"Akiyo" sequence, "High Quality" preset, Y-PSNR	25
Figure 26. Speed/Quality tradeoff. Usage area "Video Conferences",	
"Foreman" sequence, "High Quality" preset, Y-PSNR	26
Figure 27. Speed/Quality tradeoff. Usage area "Video Conferences", "P	aris"
sequence, "High Quality" preset, Y-PSNR	26
Figure 28. Speed/Quality tradeoff. Usage area "Video Conferences",	
"Stefan" sequence, "High Quality" preset, Y-PSNR	27
Figure 29. Speed/Quality tradeoff. Usage area "Video Conferences", all	
sequences, "High Quality" preset, Y-PSNR	~ -
Figure 30. Speed/Quality tradeoff. Usage area "Video Conferences",	
"Akiyo" sequence, "High Quality" preset, Y-SSIM	28
Figure 31. Speed/Quality tradeoff. Usage area "Video Conferences",	20
"Foreman" sequence, "High Quality" preset, Y-SSIM	28
Figure 32. Speed/Quality tradeoff. Usage area "Video Conferences", "P	
sequence, "High Quality" preset, Y-SSIM	ans 29
Figure 33. Speed/Quality tradeoff. Usage area "Video Conferences",	29
"Stefan" sequence, "High Quality" preset, Y-SSIM	29
Figure 34. Speed/Quality tradeoff. Usage area "Video Conferences", all	
sequences, "High Quality" preset, Y-SSIM	30
	32
"Akiyo" sequence, "High Speed" preset, Y-PSNR	32
Figure 36. Speed/Quality tradeoff. Usage area "Video Conferences",	32
"Foreman" sequence, "High Speed" preset, Y-PSNR	-
Figure 37. Speed/Quality tradeoff. Usage area "Video Conferences", "P	
sequence, "High Speed" preset, Y-PSNR	33
Figure 38. Speed/Quality tradeoff. Usage area "Video Conferences",	22
"Stefan" sequence, "High Speed" preset, Y-PSNR	33
Figure 39. Speed/Quality tradeoff. Usage area "Video Conferences", all	
sequences, "High Speed" preset, Y-PSNR	34
Figure 40. Speed/Quality tradeoff. Usage area "Video Conferences",	24
"Akiyo" sequence, "High Speed" preset, Y-SSIM	34
Figure 41. Speed/Quality tradeoff. Usage area "Video Conferences",	05
"Foreman" sequence, "High Speed" preset, Y-SSIM	
Figure 42. Speed/Quality tradeoff. Usage area "Video Conferences", "P	
sequence, "High Speed" preset, Y-SSIM	35
Figure 43. Speed/Quality tradeoff. Usage area "Video Conferences",	~ ~
"Stefan" sequence, "High Speed" preset, Y-SSIM	
Figure 44. Speed/Quality tradeoff. Usage area "Video Conferences", all	
sequences, "High Speed" preset, Y-SSIM	36
Figure 45. Bitrate Handling. Usage area "Video Conferences", "Akiyo"	~-
sequence, "High Quality" preset	
Figure 46. Bitrate Handling. Usage area "Video Conferences", "Forema	
sequence, "High Quality" preset	38
Figure 47. Bitrate Handling. Usage area "Video Conferences", "Paris"	• •
sequence, "High Quality" preset	38
Figure 48. Bitrate Handling. Usage area "Video Conferences", "Stefan"	
sequence, "High Quality" preset	39

Bitrate Handling. Usage area "Video Conferences", "Akiyo" Figure 49. Bitrate Handling. Usage area "Video Conferences", "Foreman" Figure 50. sequence, High Speed" preset40 Bitrate Handling. Usage area "Video Conferences", "Paris" Figure 51. sequence, "High Speed" preset41 Bitrate Handling. Usage area "Video Conferences", "Stefan" Figure 52. sequence, "High Speed" preset41 Average bitrate ratio for a fixed output quality using Figure 53. videoconference sequences and the High Speed preset (Y-PSNR metric). 43 Average bitrate ratio for the same quality. Usage area "Video Figure 54. Conferences". "High Speed" preset, Y-SSIM.......44 Average bitrate ratio for the same quality. Usage area "Video Figure 55. Average bitrate ratio for the same guality. Usage area "Video Figure 56. Bitrate/Quality. Usage area "Movies", "Battle" sequence, "High Figure 57. Bitrate/Quality. Usage area "Movies", "Indiana Jones" sequence, Figure 58. Bitrate/Quality. Usage area "Movies", "State Enemy" sequence, Figure 59. Bitrate/Quality. Usage area "Movies", "Wendys" sequence, Figure 60. Bitrate/Quality. Usage area "Movies", "Battle" sequence, "High Figure 61. Bitrate/Quality. Usage area "Movies", "Indiana Jones" sequence, Figure 62. Bitrate/Quality. Usage area "Movies", "State Enemy" sequence, Figure 63. Bitrate/Quality. Usage area "Movies", "Wendys" sequence, Figure 64. Bitrate/Quality. Usage area "Movies", "Battle" sequence, "High Figure 65. Bitrate/Quality. Usage area "Movies", "Indiana Jones" sequence, Figure 66. Bitrate/Quality. Usage area "Movies", "State Enemy" sequence, Figure 67. Bitrate/Quality. Usage area "Movies", "Wendys" sequence, Figure 68. Bitrate/Quality. Usage area "Movies", "Battle" sequence, "High Figure 69. Speed" preset, Y-SSIM......53 Bitrate/Quality. Usage area "Movies", "Indiana Jones" sequence, Figure 70. Bitrate/Quality. Usage area "Movies", "State Enemy" sequence, Figure 71. "High Speed" preset, Y-SSIM54 Bitrate/Quality. Usage area "Movies", "Wendys" sequence, Figure 72. Encoding speed. Usage area "Movies", "Battle" sequence, "High Figure 73.

Figure 74. Encoding speed. Usage area "Movies", "Indiana Jones"	
sequence, "High Quality" preset	.56
Figure 75. Encoding speed. Usage area "Movies", "State Enemy"	
sequence, "High Quality" preset	.56
Figure 76. Encoding speed. Usage area "Movies", "Wendys" sequence,	
"High Quality" preset	.57
Figure 77. Encoding speed. Usage area "Movies", "Battle" sequence, "H	ligh
Speed" preset	.57
Figure 78. Encoding speed. Usage area "Movies", "Indiana Jones"	
sequence, "High Speed" preset	.58
Figure 79. Encoding speed. Usage area "Movies", "State Enemy"	
sequence, "High Speed" preset	.58
Figure 80. Encoding speed. Usage area "Movies", "Wendys" sequence,	
"High Speed" preset	.59
Figure 81. Speed/Quality tradeoff. Usage area "Movies", "Battle" sequer	ce,
"High Quality" preset, Y-PSNR	.60
Figure 82. Speed/Quality tradeoff. Usage area "Movies", "Indiana Jones	
sequence, "High Quality" preset, Y-PSNR	.61
Figure 83. Speed/Quality tradeoff. Usage area "Movies", "State Enemy"	
sequence, "High Quality" preset, Y-PSNR	.61
Figure 84. Speed/Quality tradeoff. Usage area "Movies", "Wendys"	
sequence, "High Quality" preset, Y-PSNR	.62
Figure 85. Speed/Quality tradeoff. Usage area "Movies", all sequences,	
"High Quality" preset, Y-PSNR	
Figure 86. Speed/Quality tradeoff. Usage area "Movies", "Battle" sequer	ce,
"High Quality" preset, Y-SSIM	
Figure 87. Speed/Quality tradeoff. Usage area "Movies", "Indiana Jones	
sequence, "High Quality" preset, Y-SSIM	.63
Figure 88. Speed/Quality tradeoff. Usage area "Movies", "State Enemy"	
sequence, "High Quality" preset, Y-SSIM	.64
Figure 89. Speed/Quality tradeoff. Usage area "Movies", "Wendys"	
sequence, "High Quality" preset, Y-SSIM	
Figure 90. Speed/Quality tradeoff. Usage area "Movies", all sequences,	
"High Quality" preset, Y-SSIM	
Figure 91. Speed/Quality tradeoff. Usage area "Movies", "Battle" sequer	
"High Speed" preset, Y-PSNR	.66
Figure 92. Speed/Quality tradeoff. Usage area "Movies", "Indiana Jones	,
sequence, "High Speed" preset, Y-PSNR	
Figure 93. Speed/Quality tradeoff. Usage area "Movies", "State Enemy"	
sequence, "High Speed" preset, Y-PSNR	.67
Figure 94. Speed/Quality tradeoff. Usage area "Movies", "Wendys"	_
sequence, "High Speed" preset, Y-PSNR	
Figure 95. Speed/Quality tradeoff. Usage area "Movies", all the sequence	
"High Speed" preset, Y-PSNR	
Figure 96. Speed/Quality tradeoff. Usage area "Movies", "Battle" sequer	
"High Speed" preset, Y-SSIM	.68
Figure 97. Speed/Quality tradeoff. Usage area "Movies", "Indiana Jones	
sequence, "High Speed" preset, Y-SSIM	.69
Figure 98. Speed/Quality tradeoff. Usage area "Movies", "State Enemy"	
sequence, "High Speed" preset, Y-SSIM	.69

Figure 99. Sp	peed/Quality tradeoff. Usage area "Movies", "Wendys"
sequence,	"High Speed" preset, Y-SSIM70
Figure 100.	Speed/Quality tradeoff. Usage area "Movies", all sequences,
"High Spee	ed" preset, Y-SSIM70
Figure 101.	Bitrate Handling. Usage area "Movies", "Battle" sequence,
"High Qual	ity" preset
Figure 102.	Bitrate Handling. Usage area "Movies", "Indiana Jones"
	"High Quality" preset72
Figure 103.	Bitrate Handling. Usage area "Movies", "State Enemy"
-	"High Quality" preset
Figure 104.	Bitrate Handling. Usage area "Movies", "Wendys" sequence,
•	ity" preset
Figure 105.	Bitrate Handling. Usage area "Movies", "Battle" sequence,
•	ed" preset
Figure 106.	Bitrate Handling. Usage area "Movies", "Indiana Jones"
	"High Speed" preset
Figure 107.	Bitrate Handling. Usage area "Movies", "State Enemy"
sequence.	"High Speed" preset
Figure 108.	Bitrate Handling. Usage area "Movies", "Wendys" sequence,
"High Spee	ed" preset
.	Average bitrate ratio for the same quality. Usage area "Movie".
-	ed" preset, Y-PSNR
.	Average bitrate ratio for the same quality. Usage area "Movie".
-	ed" preset, Y-SSIM
Figure 111.	Average bitrate ratio for the same quality. Usage area "Movie".
•	ity" preset, Y-PSNR
5	Average bitrate ratio for the same quality. Usage area "Movie".
-	
Figure 112	ity" preset, Y-SSIM79 Bitrate/Quality. Usage area "HDTV", "Mobile Calendar"
	"High Quality" preset, Y-PSNR
• •	"High Quality" preset, Y-PSNR
	Bitrate/Quality. Usage area "HDTV", "Stockholm" sequence,
High Qual	ity" preset, Y-PSNR
-	Bitrate/Quality. Usage area "HDTV", "Troy" sequence, "High
Quality" pre	eset, Y-PSNR
	Bitrate/Quality. Usage area "HDTV", "Mobile Calendar"
	"High Quality" preset, Y-SSIM
	Bitrate/Quality. Usage area "HDTV", "Pedestrian Area"
	"High Quality" preset, Y-SSIM
	Bitrate/Quality. Usage area "HDTV", "Stockholm" sequence,
"High Qual	ity" preset, Y-SSIM83
-	
Quality" pre	eset, Y-SSIM
	Bitrate/Quality. Usage area "HDTV", "Mobile Calendar"
	"High Speed" preset, Y-PSNR85
Figure 122.	Bitrate/Quality. Usage area "HDTV", "Pedestrian Area"
sequence,	"High Speed" preset, Y-PSNR85
Figure 123.	
"High Spee	ed" preset, Y-PSNR86

Figure 124. Bitrate/Quality. Usage area "HDTV", "Troy" sequence, "High
Speed" preset, Y-PSNR86
Figure 125. Bitrate/Quality. Usage area "HDTV", "Mobile Calendar"
sequence, "High Speed" preset, Y-SSIM
Figure 126. Bitrate/Quality. Usage area "HDTV", "Pedestrian Area"
sequence, "High Speed" preset, Y-SSIM
Figure 127. Bitrate/Quality. Usage area "HDTV", "Stockholm" sequence,
"High Speed" preset, Y-SSIM
Figure 128. Bitrate/Quality. Usage area "HDTV", "Troy" sequence, "High
Speed" preset, Y-SSIM
Figure 129. Encoding speed. Usage area "HDTV", "Mobile Calendar "
sequence, "High Quality" preset
Figure 130. Encoding speed. Usage area "HDTV", "Pedestrian Area "
sequence, "High Quality" preset
Figure 131. Encoding speed. Usage area "HDTV", "Stockholm" sequence,
"High Quality" preset
Figure 132. Encoding speed. Usage area "HDTV", "Troy" sequence, "High
Quality" preset
Figure 133. Encoding speed. Usage area "HDTV", "Mobile Calendar "
sequence, "High Speed" preset91 Figure 134. Encoding speed. Usage area "HDTV", "Pedestrian Area "
sequence, "High Speed" preset
Figure 135. Encoding speed. Usage area "HDTV", "Stockholm" sequence,
"High Speed" preset
Figure 136. Encoding speed. Usage area "HDTV", "Troy" sequence, "High
Quality" preset
Figure 137. Speed/Quality tradeoff. Usage area "HDTV", "Mobile
Calendar" sequence, "High Quality" preset, Y-PSNR94
Figure 138. Speed/Quality tradeoff. Usage area "HDTV", "Pedestrian
Area" sequence, "High Quality" preset, Y-PSNR94
Figure 139. Speed/Quality tradeoff. Usage area "HDTV", "Stockholm"
sequence, "High Quality" preset, Y-PSNR95
Figure 140. Speed/Quality tradeoff. Usage area "HDTV", "Troy" sequence,
"High Quality" preset, Y-PSNR95
Figure 141. Speed/Quality tradeoff. Usage area "HDTV", all sequences,
"High Quality" preset, Y-PSNR96
Figure 142. Speed/Quality tradeoff. Usage area "HDTV", "Mobile
Calendar" sequence, "High Quality" preset, Y-SSIM
Figure 143. Speed/Quality tradeoff. Usage area "HDTV", "Pedestrian
Area" sequence, "High Quality" preset, Y-SSIM97
Figure 144. Speed/Quality tradeoff. Usage area "HDTV", "Stockholm"
sequence, "High Quality" preset, Y-SSIM97
Figure 145. Speed/Quality tradeoff. Usage area "HDTV", "Troy" sequence,
"High Quality" preset, Y-SSIM
Figure 146. Speed/Quality tradeoff. Usage area "HDTV", all sequences,
"High Quality" preset, Y-SSIM
Figure 147. Speed/Quality tradeoff. Usage area "HDTV", "Mobile
Calendar" sequence, "High Speed" preset, Y-PSNR
Figure 148. Speed/Quality tradeoff. Usage area "HDTV", "Pedestrian
Area" sequence, "High Speed" preset, Y-PSNR

Figure 149.	Speed/Quality tradeoff. Usage area "HDTV", "Stockholm"
	"High Speed" preset, Y-PSNR100
Figure 150. "High Spee	Speed/Quality tradeoff. Usage area "HDTV", "Troy" sequence, ed" preset, Y-PSNR
Figure 151.	Speed/Quality tradeoff. Usage area "HDTV", all sequences,
	ed" preset, Y-PSNR
Figure 152.	Speed/Quality tradeoff. Usage area "HDTV", "Mobile
0	sequence, "High Speed" preset, Y-SSIM
Figure 153.	Speed/Quality tradeoff. Usage area "HDTV", "Pedestrian
	ence, "High Speed" preset, Y-SSIM
Figure 154.	Speed/Quality tradeoff. Usage area "HDTV", "Stockholm"
•	"High Speed" preset, Y-SSIM
Figure 155.	Speed/Quality tradeoff. Usage area "HDTV", "Troy" sequence,
-	ed" preset, Y-SSIM
Figure 156.	Speed/Quality tradeoff. Usage area "HDTV", all sequences,
•	
Figuro 157	ed" preset, Y-SSIM104 Bitrate Handling. Usage area "HDTV", "Mobile Calendar"
Figure 157.	"High Quality" propert
	"High Quality" preset
Figure 158.	Bitrate Handling. Usage area "HDTV", "Pedestrian Area"
sequence,	"High Quality" preset
Figure 159.	Bitrate Handling. Usage area "HDTV", "Stockholm" sequence,
"High Qual	ity" preset106 Bitrate Handling. Usage area "HDTV", "Troy" sequence, "High
	eset
Figure 161.	Bitrate Handling. Usage area "HDTV", "Mobile Calendar"
sequence,	"High Speed" preset
	Bitrate Handling. Usage area "HDTV", "Pedestrian Area"
	"High Speed" preset107
	Bitrate Handling. Usage area "HDTV", "Stockholm" sequence,
"High Spee	ed" preset108
	Bitrate Handling. Usage area "HDTV", "Troy" sequence, "High
	set108
Figure 165.	Average bitrate ratio for the same quality. Usage area
	ligh Speed" preset, Y-PSNR110
Figure 166.	Average bitrate ratio for the same quality. Usage area
"HDTV". "H	ligh Speed" preset, Y-SSIM111
Figure 167.	Average bitrate ratio for the same quality. Usage area
	ligh Quality" preset, Y-PSNR111
Figure 168.	Average bitrate ratio for the same quality. Usage area
-	ligh Quality" preset, Y-SSIM
Figure 169.	Average bitrate ratio for the same quality. Usage area "Video
	es". All presets, Y-SSIM
	Average relative encoding time. Usage area "Video
	es". All presets
	Average bitrate ratio for the same quality. Usage area "Movie".
-	Y-SSIM
	Average relative encoding time. Usage area "Movie". All
presets.	
•	Average bitrate ratio for the same quality. Usage area
-	I presets, Y-SSIM116

Figure 174. presets.	Average relative encoding time. Usage area "HDTV". All 116
Figure 175.	Average bitrate ratio for a fixed quality for all categories and
	(Y-SSIM)
Figure 176. presets.	Average relative encoding time for all categories and all 117
Figure 177. pass High	Bitrate/Quality. Usage area "Movies", "Battle" sequence, "One Quality" preset, Y-PSNR
Figure 178.	Bitrate/Quality. Usage area "Movies", "Indiana Jones"
sequence,	"One pass High Quality" preset, Y-PSNR
Figure 179.	Bitrate/Quality. Usage area "Movies", "State Enemy"
sequence,	"One pass High Quality" preset, Y-PSNR
Figure 180.	Bitrate/Quality. Usage area "Movies", "Wendys" sequence,
"One pass	High Quality" preset, Y-PSNR
Figure 181.	Bitrate/Quality. Usage area "Movies", "Battle" sequence, "One
pass High	Quality" preset, Y-SSIM
Figure 182.	Bitrate/Quality. Usage area "Movies", "Indiana Jones"
sequence,	"One pass High Quality" preset, Y-SSIM
Figure 183.	Bitrate/Quality. Usage area "Movies", "State Enemy"
•	"One pass High Quality" preset, Y-SSIM
Figure 184.	Bitrate/Quality. Usage area "Movies", "Wendys" sequence,
0	High Quality" preset, Y-SSIM
Figure 185.	Encoding speed. Usage area "Movies", "Battle" sequence,
	High Quality" preset
	Encoding speed. Usage area "Movies", "Indiana Jones"
	"One pass High Quality" preset
Figure 187.	
•	"One pass High Quality" preset
Figure 188.	Encoding speed. Usage area "Movies", "Wendys" sequence,
0	High Quality" preset
	Speed/Quality tradeoff. Usage area "Movies", "Battle"
0	"One pass High Quality" preset, Y-PSNR
Figure 190.	Speed/Quality tradeoff. Usage area "Movies", "Indiana Jones"
•	"One pass High Quality" preset, Y-PSNR
Figure 191.	Speed/Quality tradeoff. Usage area "Movies", "State Enemy"
0	"One pass High Quality" preset, Y-PSNR
Figure 192.	Speed/Quality tradeoff. Usage area "Movies", "Wendys"
0	"One pass High Quality" preset, Y-PSNR
Figure 193.	Speed/Quality tradeoff. Usage area "Movies", all sequences,
	High Quality" preset, Y-PSNR
Figure 194.	Speed/Quality tradeoff. Usage area "Movies", "Battle"
0	"One pass High Quality" preset, Y-SSIM
Figure 195.	Speed/Quality tradeoff. Usage area "Movies", "Indiana Jones"
0	"One pass High Quality" preset, Y-SSIM
Figure 196.	Speed/Quality tradeoff. Usage area "Movies", "State Enemy"
	"One pass High Quality" preset, Y-SSIM
Figure 197.	Speed/Quality tradeoff. Usage area "Movies", "Wendys"
•	"One pass High Quality" preset, Y-SSIM
Figure 198.	Speed/Quality tradeoff. Usage area "Movies", all sequences,
0	High Quality" preset, Y-SSIM

	Bitrate Handling. Usage area "Movies", "Battle" sequence,
	High Quality" preset132
Figure 200.	Bitrate Handling. Usage area "Movies", "Indiana Jones"
sequence,	"One pass High Quality" preset
Figure 201.	Bitrate Handling. Usage area "Movies", "State Enemy"
sequence,	"One pass High Quality" preset
Figure 202.	Bitrate Handling. Usage area "Movies", "Wendys" sequence,
"One pass	High Quality" preset133
Figure 203.	Average bitrate ratio for the same quality. Usage area "Movie".
	High Quality" preset, Y-PSNR135
	Average bitrate ratio for the same quality. Usage area "Movie".
-	High Quality" preset, Y-SSIM135
	Bitrate/Quality. Usage area "HDTV", "Mobile Calendar"
	"One pass High Quality" preset, Y-PSNR
	Bitrate/Quality. Usage area "HDTV", "Pedestrian Area"
•	"One pass High Quality" preset, Y-PSNR
	Bitrate/Quality. Usage area "HDTV", "Stockholm" sequence,
	High Quality" preset, Y-PSNR
	Bitrate/Quality. Usage area "HDTV", "Troy" sequence, "One
	Quality" preset, Y-PSNR138
	Bitrate/Quality. Usage area "HDTV", "Mobile Calendar"
	"One pass High Quality" preset, Y-SSIM
	Bitrate/Quality. Usage area "HDTV", "Pedestrian Area"
	"One pass High Quality" preset, Y-SSIM
	Bitrate/Quality. Usage area "HDTV", "Stockholm" sequence,
	High Quality" preset, Y-SSIM
	Bitrate/Quality. Usage area "HDTV", "Troy" sequence, "One
	Quality" preset, Y-SSIM
Figure 213.	Encoding speed. Usage area "HDTV", "Mobile Calendar "
	"One pass High Quality" preset
	Encoding speed. Usage area "HDTV", "Pedestrian Area "
-	"One pass High Quality" preset
	Encoding speed. Usage area "HDTV", "Stockholm" sequence,
	High Quality" preset
	Encoding speed. Usage area "HDTV", "Troy" sequence, "One
	Quality" preset
Figure 217	Speed/Quality tradeoff. Usage area "HDTV", "Mobile
	sequence, "One pass High Quality" preset, Y-PSNR
	Speed/Quality tradeoff. Usage area "HDTV", "Pedestrian
•	ence, "One pass High Quality" preset, Y-PSNR
	Speed/Quality tradeoff. Usage area "HDTV", "Stockholm"
	"One pass High Quality" preset, Y-PSNR
	Speed/Quality tradeoff. Usage area "HDTV", "Troy" sequence,
"One nase	High Quality" preset, Y-PSNR
•	Speed/Quality tradeoff. Usage area "HDTV", all sequences,
	High Quality" preset, Y-PSNR
	Speed/Quality tradeoff. Usage area "HDTV", "Mobile
	sequence, "One pass High Quality" preset, Y-SSIM
	Speed/Quality tradeoff. Usage area "HDTV", "Pedestrian
Alea sequ	ence, "One pass High Quality" preset, Y-SSIM147

Figure 224.	Speed/Quality tradeoff. Usage area "HDTV", "Stockholm"
•	"One pass High Quality" preset, Y-SSIM
Figure 225.	Speed/Quality tradeoff. Usage area "HDTV", "Troy" sequence,
•	High Quality" preset, Y-SSIM148
Figure 226.	Speed/Quality tradeoff. Usage area "HDTV", all sequences,
"One pass	High Quality" preset, Y-SSIM148
Figure 227.	Bitrate Handling. Usage area "HDTV", "Mobile Calendar"
•	"One pass High Quality" preset
Figure 228.	Bitrate Handling. Usage area "HDTV", "Pedestrian Area"
	"One pass High Quality" preset
Figure 229.	Bitrate Handling. Usage area "HDTV", "Stockholm" sequence, High Quality" preset
Figure 230.	Bitrate Handling. Usage area "HDTV", "Troy" sequence, "One
•	Quality" preset
Figure 231.	Average bitrate ratio for the same quality. Usage area
•	One Pass High Quality" preset, Y-PSNR
Figure 232.	Average bitrate ratio for the same quality. Usage area
"HDTV"."	One Pass High Quality" preset, Y-SSIM152
Figure 233.	Example frame from a synthetic sequence used for motion
analysis.	154
Figure 234.	Final results of motion compensation analysis
Figure 235.	Synthetic sequence for tail area analysis
Figure 236.	Areas for calculating the quality metric for tail area analysis.
Figure 237.	Final results of tail area analysis157
Figure 238.	2005 year. Bitrate/Quality. Usage area "Movies", "Battle"
•	"High Quality" preset, Y-PSNR
Figure 239.	2006 year. Bitrate/Quality. Usage area "Movies", "Battle"
sequence,	"High Quality" preset, Y-SSIM159
Figure 240.	2007 year. Bitrate/Quality. Usage area "Movies", "Battle"
	"High Quality" preset, Y-SSIM
Figure 241.	This year. Bitrate/Quality. Usage area "Movies", "Battle"
	"High Quality" preset, Y-SSIM
Figure 242.	Different versions of x264 encoder. Bitrate/Quality. Usage
Figure 243.	ies", "Battle" sequence, "High Quality" preset, Y-SSIM161 The progress of the x264 encoder over years. Y-SSIM161
Figure 244.	Different versions of x264 encoder. Bitrate/Quality. Usage
•	ies", "Battle" sequence, "High Quality" preset, Y-PSNR 162
Figure 245.	The progress of the x264 encoder over years. Y-PSNR 162
Figure 246.	Different versions of x264 encoder. Bitrate handling
Figure 247.	x264 different versions. Per frame analysis, "Battle" sequence,
700kbps	163
Figure 248.	Akiyo sequence, frame 1164
Figure 249.	Akiyo sequence, frame 190164
Figure 250.	Foreman sequence, frame 77
Figure 251.	Foreman sequence, frame 258
Figure 252.	Paris sequence, frame 1
Figure 253.	Paris sequence, frame 754
Figure 254. Figure 255.	Stefan sequence, frame 1
Figure 255.	Indiana Jones sequence, frame 1
- iguit 200.	

Figure 257.	Battle sequence, frame 839	169
Figure 258.	State Enemy sequence, frame 1115	170
Figure 259.	Wendys sequence, frame 97	
Figure 260.	Mobile Calendar sequence, frame 416	
Figure 261.	Pedestrian Area sequence, frame 129	
Figure 262.	Pedestrian Area sequence, frame 574	
•		
Figure 263.	Troy sequence, frame 1	
Figure 264.	icas' mpegable H.264 Command-line encoder	
Figure 265.	Elecard AVC Video Encoder 8-bit edition	177
Figure 266.	Intel IPP H.264 encoder	177
Figure 267.	MainConcept H.264/AVC encoder	178
Figure 268.	x264 encoder	178
Figure 269.	Xvid encoder	179
Figure 270.	Integral situation with codecs. This plot shows the situation	n
more clearly.		185
Figure 271.	Source Data	
Figure 272.	Axes' Inversion and Averaging Interval Choosing	186
Figure 273.	Areas' under Curves Ratio	186
Figure 274.	PSNR example for two frames	188
Figure 275.	Original and processed images (for PSNR example)	188
Figure 276.	PSNR values for original and processed images	
Figure 277.	SSIM example for compressed image	
Figure 278.	Original and processed images (for SSIM example)	
0		
Figure 279.	SSIM values for original and processed images	192

13 About the Graphics & Media Lab Video Group



The Graphics & Media Lab Video Group is part of the Computer Science Department of Moscow State University. The Graphics Group began at the end of 1980's, and the Graphics & Media Lab was officially founded in 1998. The main research avenues of the lab include areas of computer graphics, computer vision and media processing (audio, image and video). A number of patents have been acquired based on the lab's research, and other results have been presented in various publications.

The main research avenues of the Graphics & Media Lab Video Group are video processing (pre- and post-, as well as video analysis filters) and video compression (codec testing and tuning, quality metric research and codec development).

The main achievements of the Video Group in the area of video processing include:

- High-quality industrial filters for format conversion, including high-quality deinterlacing, high-quality frame rate conversion, new, fast practical super resolution and other processing tools.
- Methods for modern television sets, such as a large family of up-sampling methods, smart brightness and contrast control, smart sharpening and more..
- Artifact removal methods, including a family of denoising methods, flicking removal, video stabilization with frame edge restoration, and scratch, spot and drop-out removal.
- Application-specific methods such as subtitle removal, construction of panorama images from video, video to high-quality photo conversion, video watermarking, video segmentation and practical fast video deblur.

The main achievements of the Video Group in the area of video compression include:

- Well-known public comparisons of JPEG, JPEG-2000 and MPEG-2 decoders, as well as MPEG-4 and annual H.264 codec testing; codec testing for weak and strong points, along with bug reports and codec tuning recommendations.
- Video quality metric research; the MSU Video Quality Measurement Tool and MSU Perceptual Video Quality Tool are publicly available.
- Internal research and contracts for modern video compression and publication of MSU Lossless Video Codec and MSU Screen Capture Video Codec; these codecs have one of the highest available compression ratios.

The Video Group has also worked for many years with companies like Intel, Samsung and RealNetworks.

In addition, the Video Group is continually seeking collaboration with other companies in the areas of video processing and video compression.

E-mail: video@graphics.cs.msu.ru